



## Datasheet

DS000622

# AS7026GG

## Bio Sensor

v3-00 • 2021-Jul-23

---

# Content Guide

|          |   |           |           |   |            |
|----------|---|-----------|-----------|---|------------|
| <b>1</b> | <b>General Description .....</b>        | <b>3</b>  | <b>8</b>  | <b>Application Information.....</b>     | <b>105</b> |
| 1.1      | Key Benefits & Features.....            | 3         | 8.1       | Application Examples .....              | 105        |
| 1.2      | Applications .....                      | 3         | <b>9</b>  | <b>Package Drawings &amp; Markings.</b> | <b>106</b> |
| 1.3      | Block Diagram .....                     | 4         | <b>10</b> | <b>Tape &amp; Reel Information.....</b> | <b>107</b> |
| <b>2</b> | <b>Ordering Information .....</b>       | <b>5</b>  | <b>11</b> | <b>Soldering &amp; Storage</b>          |            |
| <b>3</b> | <b>Pin Assignment .....</b>             | <b>6</b>  |           | <b>Information .....</b>                | <b>109</b> |
| 3.1      | Pin Diagram.....                        | 6         | <b>12</b> | <b>Revision Information .....</b>       | <b>110</b> |
| 3.2      | Pin Description .....                   | 6         | <b>13</b> | <b>Legal Information.....</b>           | <b>111</b> |
| <b>4</b> | <b>Absolute Maximum Ratings .....</b>   | <b>8</b>  |           |   |            |
| <b>5</b> | <b>Electrical Characteristics .....</b> | <b>9</b>  |           |   |            |
| <b>6</b> | <b>Functional Description .....</b>     | <b>15</b> |           |   |            |
| 6.1      | Optical Analog Front End .....          | 15        |           |   |            |
| <b>7</b> | <b>Register Description .....</b>       | <b>17</b> |           |   |            |
| 7.1      | Register Overview .....                 | 17        |           |   |            |
| 7.2      | I <sup>2</sup> C.....                   | 94        |           |   |            |

# 1 General Description

## 1.1 Key Benefits & Features

The benefits and features of AS7026GG, Bio Sensor], are listed below:

**Figure 1:**  
Added Value of Using AS7026GG

| Benefits  | Features  |
|---|---|
| Address all skin types  | Improved optical path   |
| Allows smallest application size e.g. narrow HRM measurement band | Single device integrated optical solution   |
| Electrocardiogram ECG with dry electrodes                         | Embedded low noise analog front end for ECG signals acquisition   |
| Enabling blood pressure measurements                              | Synchronized PPG and ECG acquisition  |
| Good HRM measurement quality                                      | Low noise analog optical front end  |
| Additional information for end user                               | Analog electrical front end (e.g. for temperature sensing using a NTC or galvanic skin resistivity (GSR)) |
| Integrated interference filter                                    | Reduce negative effect of strong sunlight   |
| Long operating time   | Hardware sequencer to offload processor<br>Adjustable LED driver with current control                     |
| Works reliably with ambient light                                 | Embedded ambient light rejection system   |


## 1.2 Applications

- Optical sensor platform
- Fitness band
- Smart watch
- Heart rate monitor
- Cuff-less blood pressure measurements

### 1.3 Block Diagram

The functional blocks of this device are shown below:

Figure 2 :  
Functional Blocks of AS7026GG

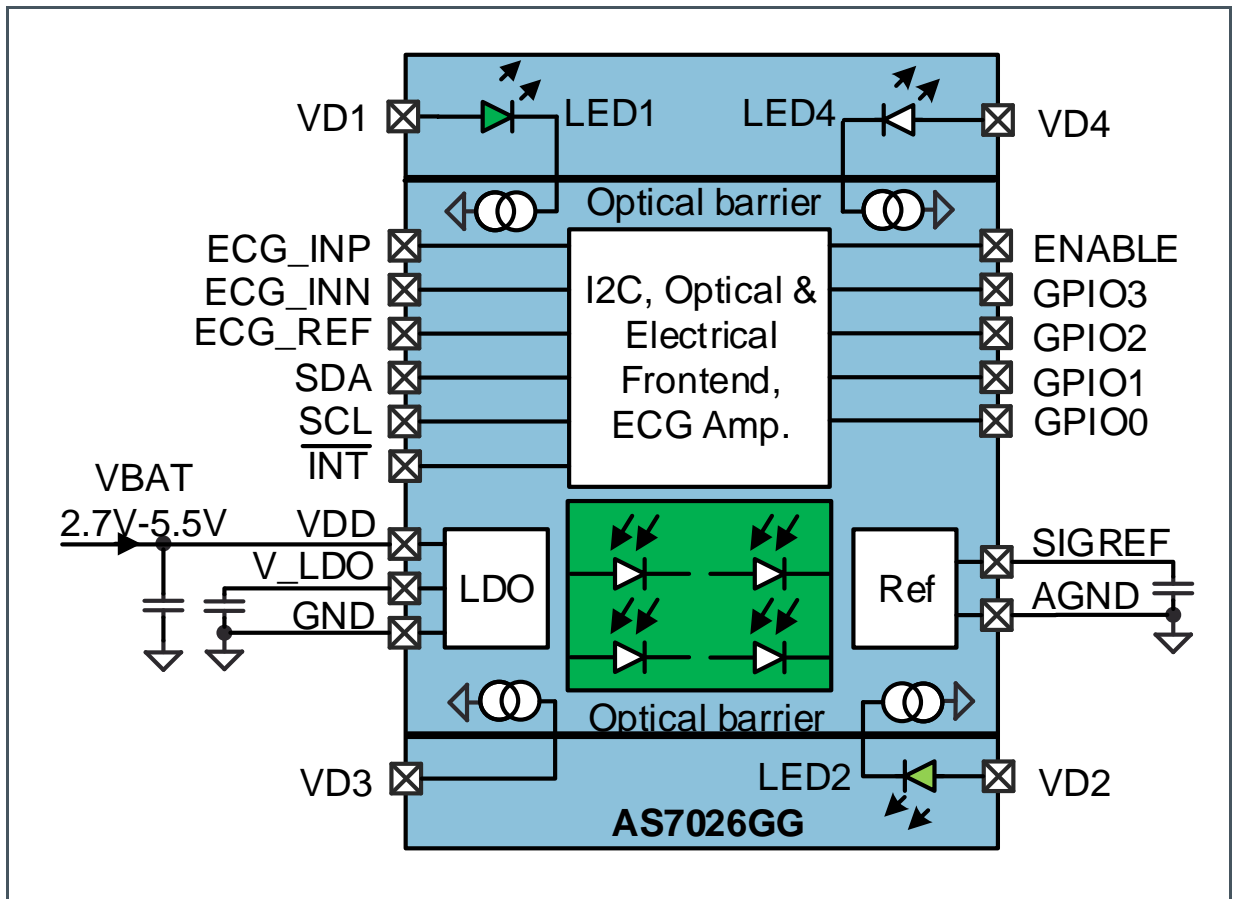

---

## 2 Ordering Information


---

| Ordering Code | Package | Marking | Delivery Form | Delivery Quantity |
|---------------|---------|---------|---------------|-------------------|
| AS7026GG-COLT | OLGA-20 | n.a.    | Tape & Reel   | 5000 pcs/reel     |
| AS7026GG-COLM | OLGA-20 | n.a.    | Tape & Reel   | 1000 pcs/reel     |

## 3 Pin Assignment

### 3.1 Pin Diagram

Figure 3:  
AS7026GG Optical Module Pin-Out –Top View (not to scale)

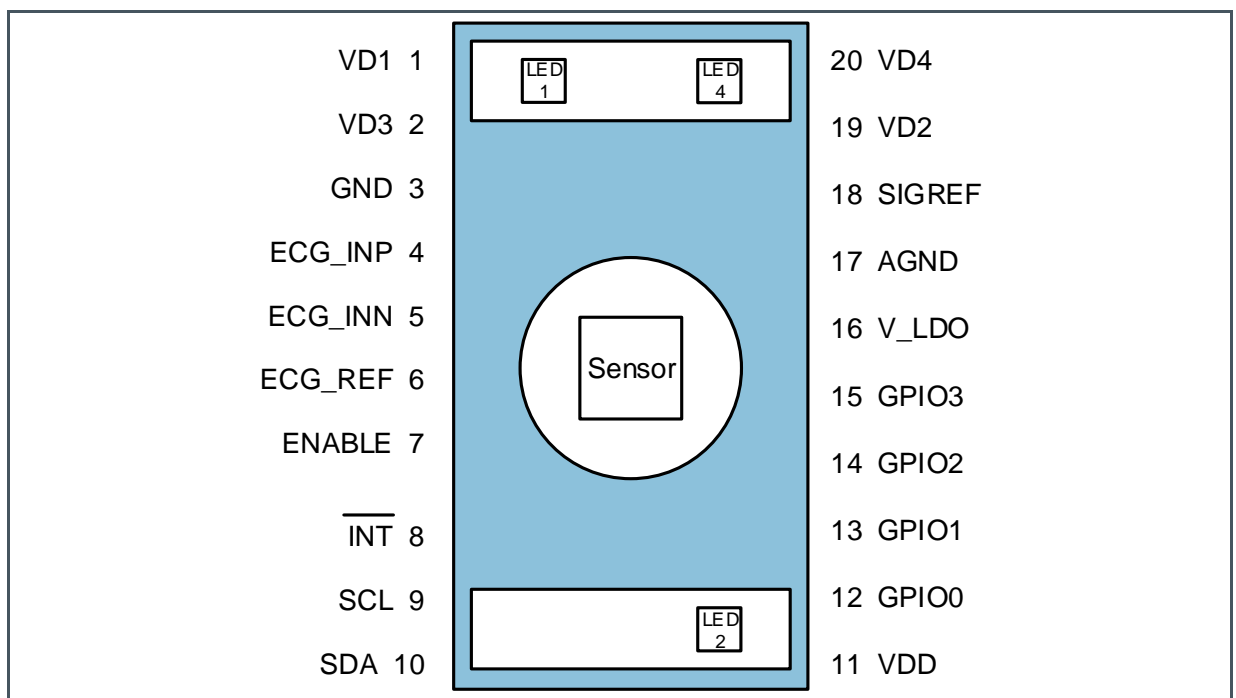

### 3.2 Pin Description

Figure 4:  
Pin Description of AS7026GG

| Pin Number | Pin Name | Pin Type <sup>(1)</sup> | Description  |
|------------|----------|-------------------------|--|
| 1          | VD1      | AI                      | Supply voltage for LED D1                                |
| 2          | VD3      | AI                      | Connection to current sink 3                             |
| 3          | GND      | G                       | Power supply ground. All voltages are referenced to GND. |
| 4          | ECG_INP  | AI                      | ECG amplifier positive input                             |
| 5          | ECG_INN  | AI                      | ECG amplifier negative input                             |
| 6          | ECG_REF  | AO                      | ECG amplifier reference output                           |

| Pin Number | Pin Name | Pin Type <sup>(1)</sup> | Description  |
|------------|----------|-------------------------|--|
| 7          | ENABLE   | DI                      | Enable input for AS7026GG. Active high. Setting this input to low resets all internal registers and the AS7026GG enters power down mode. Setting it high allows operation of the AS7026GG.<br>If ENABLE is not used (AS7026GG always enabled), connect to VDD.   |
| 8          | INT      | DO                      | Open drain interrupt output pin. Active low.   |
| 9          | SCL      | DI                      | I <sup>2</sup> C serial clock input terminal – the device does not use clock stretching therefore SCL is only an input terminal.   |
| 10         | SDA      | DI                      | I <sup>2</sup> C serial data I/O terminal – open drain.  |
| 11         | VDD      | P                       | Supply voltage. Connect a 2.2 $\mu$ F capacitor to GND.  |
| 12         | GPIO0    | GPIO                    | General purpose input/output   |
| 13         | GPIO1    | GPIO                    | General purpose input/output   |
| 14         | GPIO2    | GPIO                    | General purpose input/output   |
| 15         | GPIO3    | GPIO                    | General purpose input/output   |
| 16         | V_LDO    | AO                      | 1.9 V output voltage. Connect 2.2 $\mu$ F capacitor to GND<br>(e.g. 0402 sized capacitor GRM153R60J225ME95 or 0201 sized GRM033R60J225ME47 from Murata – needs to have >1 $\mu$ F with 1.0 V voltage bias); do not load externally   |
| 17         | AGND     | GND                     | Analog ground. Connect to low noise GND  |
| 18         | SIGREF   | AO                      | Analog reference output. Connect 2.2 $\mu$ F capacitor to GND<br>(e.g. 0402 sized capacitor GRM153R60J225ME95 or 0201 sized GRM033R60J225ME47 from Murata – needs to have >1 $\mu$ F specified for 1.0 V voltage bias); do not load externally<br>The typical operating voltage on this pin is 0.6 V (sigref_en=1) |
| 19         | VD2      | AI                      | Supply voltage for LED D2  |
| 20         | VD4      | AI                      | Supply voltage for LED D4  |

|     |      |                    |
|-----|------|--------------------|
| (1) | DI   | Digital Input      |
|     | DO   | Digital Output     |
|     | AI   | Analog Input       |
|     | AO   | Analog Output      |
|     | GPIO | General Purpose IO |
|     | P    | Power Supply       |

## 4 Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated under “Operating Conditions” is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**Figure 5**  
**Absolute Maximum Ratings of AS7026GG**

| Symbol   | Parameter   | Min  | Max                 | Unit | Comments   |
|--|---|------|---------------------|------|--|
| <b>Electrical Parameters</b>                     |   |      |                     |      |  |
| $V_{SUP} / V_{GND}$                              | Supply Voltage to Ground  |      | 6                   | V    |  |
| $V_{IN}$   | Input Pin Voltage to Ground pins GPIO0/1/2/3                            | -0.3 | VDD+0.3V<br>max. 6V | V    | Diode to VDD   |
| $V_{IN-OTHER}$                                   | Input Pin Voltage to Ground pins SCL/SDA/INT/ENABLE and VD1/VD2/VD3/VD4 | -0.3 | 5.5                 | V    | No internal diode to VDD or V_LDO  |
| $V_{VD1/2/3/4\_INTERNAL}$                        | Voltage between internal pin of VD1-VD4 to VDD                          |      | VDD+0.3V            | V    | Internal diode between current source (internal node at anode of the LED if the pin has a LED otherwise VD1/2/3/4 pin) and VDD |
| $V_{IN-LDO}$                                     | Input Pin Voltage to Ground for pin V_LDO                               | -0.3 | 2.0 V               | V    | Diode to VDD   |
| $V_{IN-LDO\_DIODE}$                              | Input Pin Voltage to Ground pins for ECG_INP/ECG_INN/ECG_REF/SIGREF     | -0.3 | 2.0 V               |      | Diode to V_LDO   |
| $V_{GND-AGND}$                                   | Analog to power ground voltage difference                               | -0.3 | +0.3                | V    |  |
| $I_{SCR}$  | Input Current (latch-up immunity)                                       |      | ± 100               | mA   | JEDEC JESD78D Nov 2011   |
| <b>Electrostatic Discharge</b>                   |   |      |                     |      |  |
| $ESD_{HBM}$                                      | Electrostatic Discharge HBM   |      | ± 2                 | kV   | JS-001-2014  |
| <b>Temperature Ranges and Storage Conditions</b> |   |      |                     |      |  |
| $T_{STRG}$                                       | Storage Temperature Range   | - 40 | 85                  | °C   |  |
| $T_{BODY}$                                       | Package Body Temperature  |      | 260                 | °C   | IPC/JEDEC J-STD-020 <sup>(1)</sup>   |
| $RH_{NC}$  | Relative Humidity (non-condensing)                                      | 5    | 85                  | %    |  |
| MSL  | Moisture Sensitivity Level  |      | 3                   |      | Maximum floor life time of 168h  |

- (1) The reflow peak soldering temperature (body temperature) is specified according to IPC/JEDEC J-STD-020 “Moisture/Reflow Sensitivity Classification for Nonhermetic Solid State Surface Mount Devices.” The lead finish for Pb-free leaded packages is “Matte Tin” (100 % Sn)



## 5 Electrical Characteristics

All limits are guaranteed. The parameters with Min and Max values are guaranteed with production tests or SQC (Statistical Quality Control) methods.

VDD=2.7 V to 5.5 V, typ. values are at T<sub>AMB</sub>=25 °C (unless otherwise specified).

**Figure 6:**  
**Electrical Characteristics of AS7026GG**

| Symbol           | Parameter                      | Conditions   | Min | Typ | Max | Unit |
|------------------|--------------------------------|--|-----|-----|-----|------|
| VDD              | Supply voltage                 |  | 2.7 | 3.8 | 5.5 | V    |
| T <sub>AMB</sub> | Operating free-air temperature |  | -30 |     | 70  | °C   |
| IDD              | Supply current                 | ENABLE=VDD, ldo_en=0; osc_en=0; internal LDO operating in low power mode – only I <sup>2</sup> C communication possible, no blocks shall be enabled <sup>(1)</sup> |     | 22  |     | μA   |
|                  |                                | ENABLE=VDD, ldo_en=1; osc_en=0; internal LDO operating and bandgap running – I <sup>2</sup> C communication possible, analog blocks can be enabled <sup>(1)</sup>  |     | 32  |     | μA   |
|                  |                                | ENABLE=VDD, ldo_en=1, osc_en=1; internal LDO operating and bandgap and oscillator running – I <sup>2</sup> C communication possible, analog blocks can be enabled  |     | 86  |     | μA   |
|                  |                                | SIGREF buffer (sigref_en=1)  |     | 52  |     | μA   |
|                  |                                | transimpedance amplifier (pd_amp_en=1)   |     | 110 |     | μA   |
|                  |                                | Optical front end operating (one channel)  |     | 200 |     | μA   |

| Symbol                          | Parameter  | Conditions  | Min      | Typ | Max        | Unit |
|---------------------------------|--|---|----------|-----|------------|------|
|                                 |  | Gain stage<br>(ofe1_gain_en=1 or<br>ofe2_gain_en=1)   |          | 75  |            | μA   |
|                                 |  | ADC sampling at 20 Hz<br>with 64 μs settling time   |          | 4.5 |            | μA   |
|                                 |  | ECG amplifier and<br>frontend (need SIGREF<br>enabled)  |          | 190 |            | μA   |
|                                 |  | ECG leakage<br>compensation<br>(ecg_low_leakage_en=1),<br>low pass filter, high pass<br>filter and gain stage |          | 151 |            | μA   |
|                                 |  | Power down, no I <sup>2</sup> C<br>communication possible<br>ENABLE=GND <sup>(2)</sup>                        |          | 0.5 |            | μA   |
| VOL                             | GPI00-3,<br>INT, SDA<br>output low<br>voltage            | With 3 mA load<br>With 6 mA load  | 0<br>0   |     | 0.4<br>0.8 | V    |
| VOH                             | GPI00-3<br>output high<br>voltage                        | With 3 mA load  | 2.3      |     | VDD        | V    |
| VIH                             | GPI00-3,<br>SCL, SDA,<br>ENABLE<br>input high<br>voltage |   | 1.25     |     |            | V    |
| VIL                             | GPI00-3,<br>SCL, SDA,<br>ENABLE<br>input low<br>voltage  |   |          |     | 0.54       | V    |
| ILEAK1                          | GPI00-3,<br>SCL, SDA,<br>ENABLE, INT                     |   | -1       |     | 1          | μA   |
| ILEAK2                          | VD1, VD2<br>VD3, VD4                                     |   | -3       |     | 3          | μA   |
| E_f2M                           | Tolerance of<br>internal<br>2 MHz<br>oscillator          | 0 °C to 70 °C, VDD<5.0 V<br>-30 °C to 70 °C   | -2<br>-4 |     | 2<br>2     | %    |
| <b>ECG Amplifier and Filter</b> |  |   |          |     |            |      |
| ILEAK_ECG                       | ECG pins<br>leakage<br>current                           | Lab evaluation shows<br><±20 nA maximum<br>leakage current. Not<br>production tested.                         |          | ±1  |            | nA   |


| Symbol                     | Parameter  | Conditions   | Min | Typ  | Max | Unit                                 |
|----------------------------|--|--|-----|------|-----|--------------------------------------|
| $V_{\text{NOISE\_ECG}}$    | Integrated noise                                 | ADC sampling at 400 Hz; low pass filter set to 40 Hz, PPG channel operating in parallel  |     | 20   |     | $\mu\text{A}$                        |
| $\text{CMRR}_{\text{ECG}}$ | Common mode rejection ratio                      | Measured at 50 Hz and 100 Hz   |     | 73   |     | dB                                   |
| <b>LED</b>                 |  |  |     |      |     |                                      |
| $I_{\text{LED}}$           | Allowed operating LED current range              |  | 0   |      | 50  | mA                                   |
|                            |  | 1/10 duty cycle @ 1 kHz  |     |      | 100 | mA                                   |
| $V_{\text{FLED}}$          | Forward voltage                                  | Green LED, add compliance voltage of LED driver, $I_{\text{LED}}=10\text{ mA}$ , add compliance voltage of LED driver ( $V_{\text{Dmin}}$ ) to obtain minimum voltage on the pin to drive the current at $T_{\text{AMB}}=25\text{ }^{\circ}\text{C}$ |     | 3.1  | 3.3 | V                                    |
|                            |  | IR LED, $I_{\text{LED}}=20\text{ mA}$  |     | 1.4  |     |                                      |
| $\lambda_{\text{p}}$       | Peak wavelength at $I_{\text{LED}}=20\text{ mA}$ | Green LED  |     | 527  |     | nm                                   |
|                            |  | IR LED   |     | 940  |     |                                      |
| <b>LED Driver</b>          |  |  |     |      |     |                                      |
| $I_{\text{LED1/2/3/4}}$    | LED output current range                         | LED current is adjustable with 10 bits – registers curr1/2/3/4   | 0   |      | 100 | mA                                   |
|                            | Tolerance  | At 35 mA output current (currX[9:0]=166 h, X=1...4), $V_{\text{DD}}<5.0\text{ V}$  | -7  |      | 7   | %                                    |
| $V_{\text{Dmin}}$          | Output voltage compliance                        |  |     | 0.3  |     | V                                    |
| $V_{\text{Dmax}}$          |  |  |     |      | 5.5 | V                                    |
| <b>Photodiode</b>          |  |  |     |      |     |                                      |
| $\text{Re}_{\text{PD1-4}}$ | Irradiance responsivity photodiode PD1...PD4     | $\lambda_{\text{p}}=550\text{ nm}$ , 4 photodiodes used pd1/2/3/4=1, gain_g=4x, gain_en=1, pd_ampres = 7 M $\Omega$  |     | 45.9 |     | mV/<br>( $\mu\text{W}/\text{cm}^2$ ) |
|                            | Irradiance responsivity photodiode B             | $\lambda_{\text{p}}=940\text{ nm}$ , gain_g=4x, gain_en=1, pd_ampres=7 M $\Omega$  |     | 0.3  |     |                                      |
| $I_{\text{d}}$             | Dark current                                     | $E_{\text{e}}=0$ , $T_{\text{AMB}}=25\text{ }^{\circ}\text{C}$   | 0   |      | 1   | nA                                   |

| Symbol                             | Parameter   | Conditions  | Min | Typ | Max              | Unit |
|------------------------------------|---|---|-----|-----|------------------|------|
| I <sub>os</sub>                    | Extrapolated offset current                         | T <sub>AMB</sub> =25 °C                                     | -1  |     | 1                | nA   |
| <b>ADC</b>                         |   |   |     |     |                  |      |
| V <sub>ref</sub>                   | ADC reference voltage                               |   |     | 1.6 |                  | V    |
| N <sub>bit</sub>                   | Resolution  |   | 14  |     |                  | Bit  |
| INL                                | Relative accuracy                                   | T <sub>AMB</sub> =25 °C                                     | -8  |     | 8                | LSB  |
| DNL <sup>(3)</sup>                 | Differential nonlinearity                           | T <sub>AMB</sub> =25 °C                                     |     | 1.5 |                  | LSB  |
|                                    | Offset error  | T <sub>AMB</sub> =25 °C                                     | -8  |     | 8                | LSB  |
|                                    | Gain error  | T <sub>AMB</sub> =25 °C                                     | -8  |     | 8                | LSB  |
| SNR                                | Signal-to-noise ratio                               | F <sub>sample</sub> = 1 kHz,<br>F <sub>signal</sub> =100 Hz |     | 80  |                  | dB   |
| THD                                | Total harmonic distortion                           | F <sub>sample</sub> = 1 kHz,<br>F <sub>signal</sub> =100 Hz |     | -70 |                  | dB   |
| T <sub>conv</sub>                  | Conversion rate                                     | 14-bit resolution   |     |     | 50               | ksps |
| V <sub>in</sub>                    | Input voltage range                                 |   | 0   |     | V <sub>ref</sub> | V    |
| <b>I<sup>2</sup>C Mode Timings</b> |   |   |     |     |                  |      |
| f <sub>SCLK</sub>                  | SCL Clock Frequency                                 |   | 0   |     | 400              | kHz  |
| t <sub>BUF</sub>                   | Bus Free Time Between a STOP and START Condition    |   | 1.3 |     |                  | μs   |
| t <sub>HD:STA</sub>                | Hold Time (Repeated) START Condition <sup>(4)</sup> |   | 0.6 |     |                  | μs   |
| t <sub>LOW</sub>                   | LOW Period of SCL Clock                             |   | 1.3 |     |                  | μs   |
| t <sub>HIGH</sub>                  | HIGH Period of SCL Clock                            |   | 0.6 |     |                  | μs   |
| t <sub>SU:STA</sub>                | Setup Time for a Repeated START Condition           |   | 0.6 |     |                  | μs   |

| Symbol       | Parameter                             | Conditions                                   | Min | Typ | Max | Unit    |
|--------------|---------------------------------------|--|-----|-----|-----|---------|
| $t_{HD:DAT}$ | Data Hold Time <sup>(5)</sup>         |  | 0   |     | 0.9 | $\mu$ s |
| $t_{SU:DAT}$ | Data Setup Time <sup>(6)</sup>        |  |     |     |     |         |
| $t_R$        | Rise Time of Both SDA and SCL Signals |  | 20  |     | 300 | ns      |
| $t_F$        | Fall Time of Both SDA and SCL Signals |  | 20  |     | 300 | ns      |
| $t_{SU:STO}$ | Setup Time for STOP Condition         |  | 0.6 |     |     | $\mu$ s |
| $C_B$        | Capacitive Load for Each Bus Line     | CB — total capacitance of one bus line in pF |     |     | 500 | pF      |
| $C_{I/O}$    | I/O Pin Capacitance (SDA, SCL)        |  |     |     | 10  | pF      |

- (1) GPIO0-3 configured to draw minimum current (software dependent).
- (2) AS7026GG I<sup>2</sup>C interface active also in power down mode.
- (3) Specified only typical value for DNL to reduce production test time.
- (4) After this period, the first clock pulse is generated.
- (5) A device must internally provide a hold time of at least 300 ns for the SDA signal (referred to the VIHMIN of the SCL signal) to bridge the undefined region of the falling edge of SCL.
- (6) Fast-mode device can be used in a standard-mode system, but the requirement  $t_{SU:DAT} = t_{SU:DAT} = 250$  ns must then be met. This is automatically the case if the device does not stretch the LOW period of the SCL signal. If such a device does stretch the LOW period of the SCL signal, it must output the next data bit to the SDA line  $t_R \max + t_{SU:DAT} = 1000 + 250 = 1250$  ns before the SCL line is released.

**Figure 7:**  
**I<sup>2</sup>C Mode Timing Diagram**

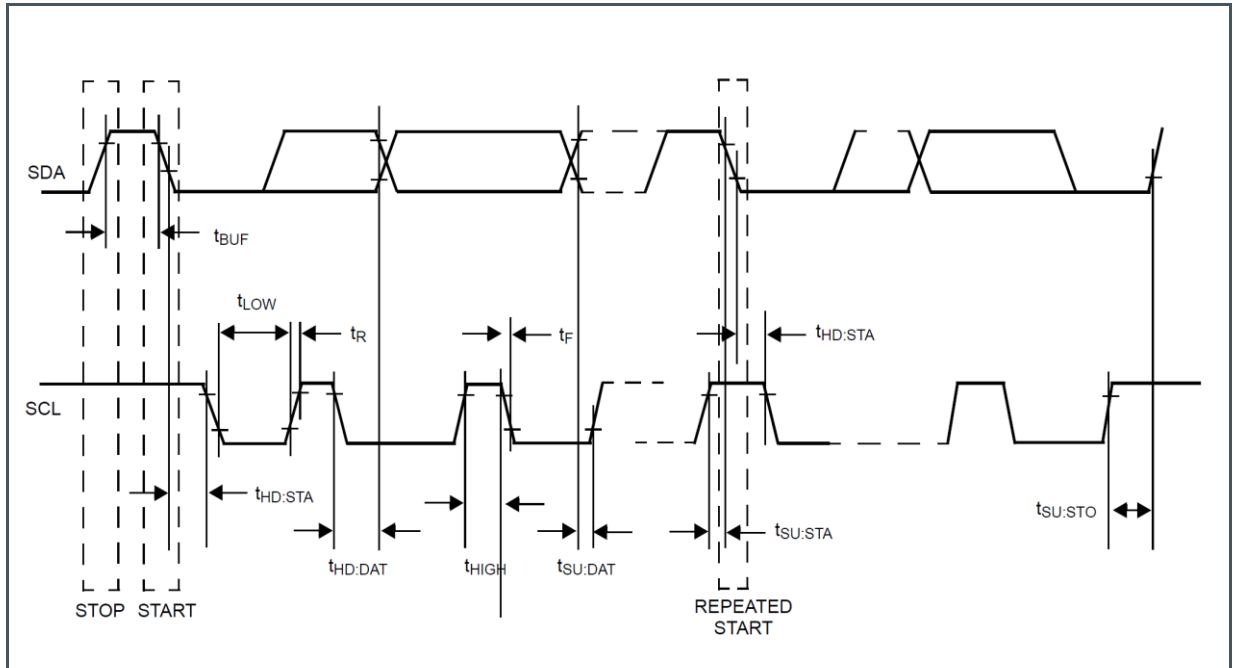


**I<sup>2</sup>C Mode Timing Diagram:** This figure shows the different timings required for I<sup>2</sup>C communication

# 6 Functional Description

## 6.1 Optical Analog Front End

Figure 8:  
Optical Analog Front End

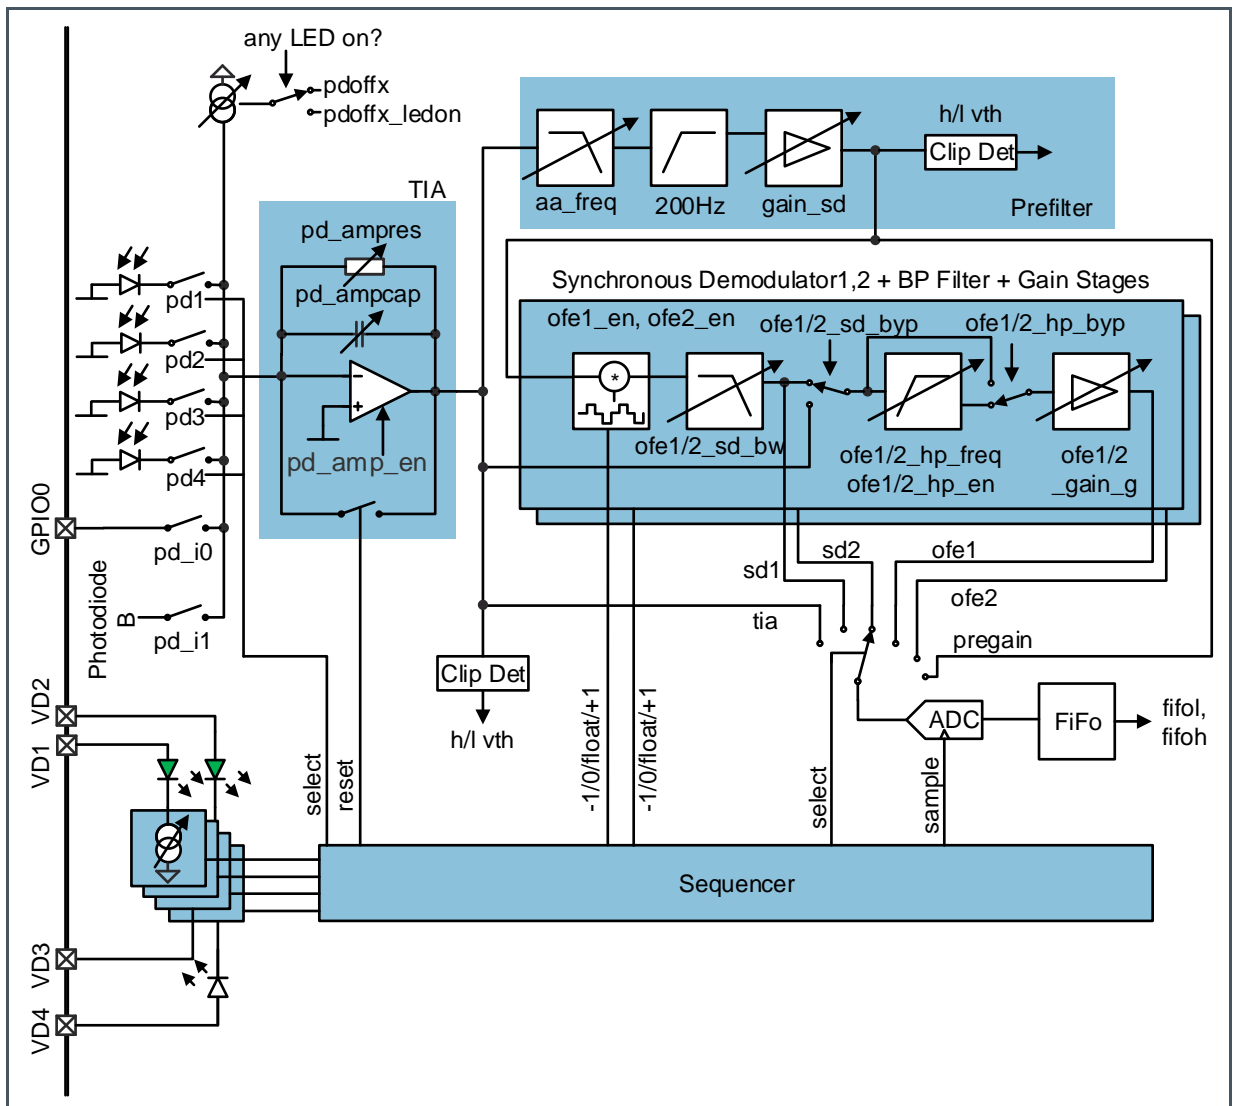


### 6.1.1 LEDs

Two green LEDs are used with anode on pin VD1 and VD2. A IR LED is connected with anode to pin VD4. VD3 allows direct access to the current sink 3

### 6.1.2 LED-Driver

The LED-driver outputs can be controlled manually or by the built in sequencer. See section 7.1.7 Optical Front End Operating Modes

Figure 9:  
LED Drivers

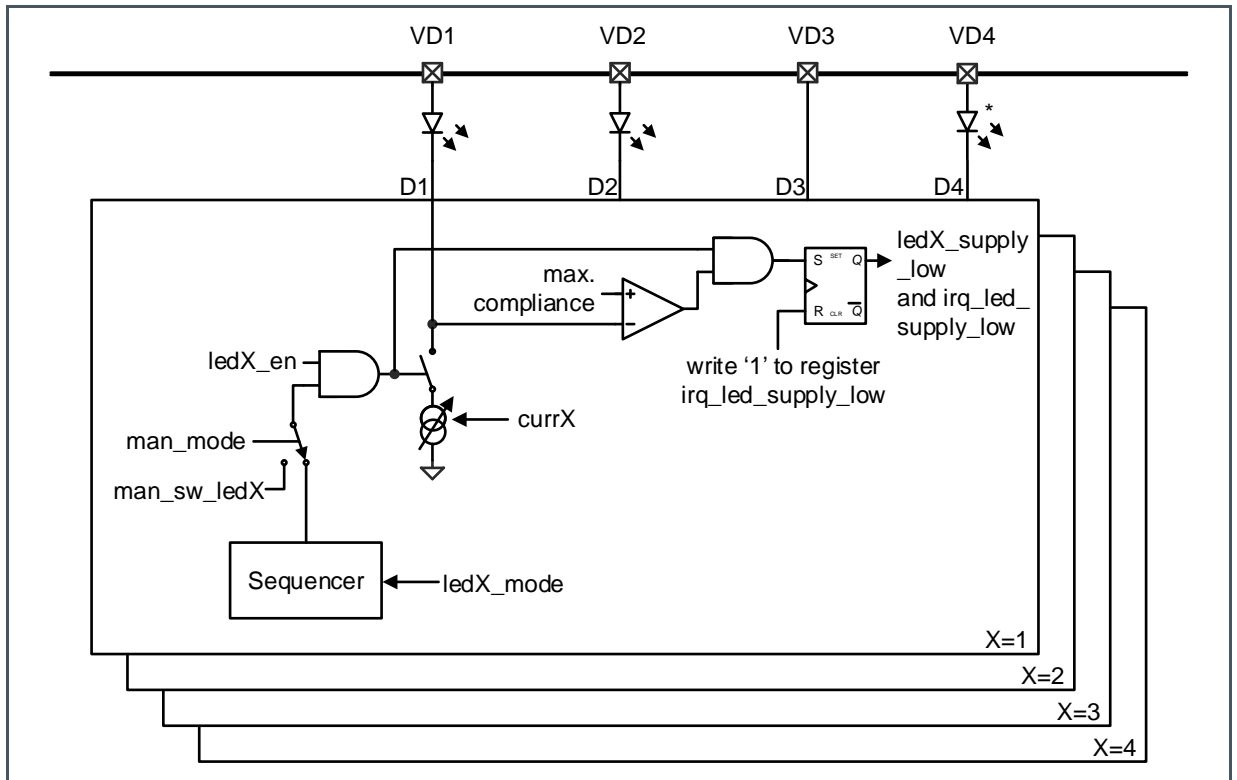



# 7 Register Description

## 7.1 Register Overview

Figure 10:  
Register Overview

| Addr                   | Name           | <D7>                        | <D6>           | <D5>              | <D4>              | <D3>                        | <D2>            | <D1>            | <D0>            |
|------------------------|----------------|-----------------------------|----------------|-------------------|-------------------|-----------------------------|-----------------|-----------------|-----------------|
| <b>Register type 1</b> |                |                             |                |                   |                   |                             |                 |                 |                 |
| 0x10                   | LED_CFG        | Not used                    | sigref_en      | sigref_voltage[1] | sigref_voltage[0] | led4_en                     | led3_en         | led2_en         | led1_en         |
| 0X12                   | LED1_CURR_L    | Curr1[1:0]                  |                | Not used          | Not used          | Not used                    | Not used        | Not used        | Not used        |
| 0X13                   | LED1_CURR_H    | Curr1[9:2]                  |                |                   |                   |                             |                 |                 |                 |
| 0X14                   | LED2_CURR_L    | Curr2[1:0]                  |                | Not used          | Not used          | Not used                    | Not used        | Not used        | Not used        |
| 0X15                   | LED2_CURR_H    | Curr2[9:0]                  |                |                   |                   |                             |                 |                 |                 |
| 0X16                   | LED3_CURR_L    | Curr3[1:0]                  |                | Not used          | Not used          | Not used                    | Not used        | Not used        | Not used        |
| 0X17                   | LED3_CURR_H    | Curr3[9:2]                  |                |                   |                   |                             |                 |                 |                 |
| 0X18                   | LED4_CURR_L    | Curr4[1:0]                  |                | Not used          | Not used          | Not used                    | Not used        | Not used        | Not used        |
| 0X19                   | LED4_CURR_H    | Curr4[9:2]                  |                |                   |                   |                             |                 |                 |                 |
| 0X2C                   | LED12_MODE     | Man-sw_led2                 | Led2_mode[2:0] |                   |                   | Man-sw_led1                 | Led1_mode[2:0]  |                 |                 |
| 0X2D                   | LED34_MODE     | Man-sw_led4                 | Led4_mode[2:0] |                   |                   | Man-sw_led3                 | Led3_mode[2:0]  |                 |                 |
| 0X2E                   | MAN_SEQ_CFG    | man_mode                    | man_sw_sdmult  | man_sw_sdpol      | man_sw_itg        | diode_ctrl[2:0]             |                 |                 | seq_en          |
| 0XA2                   | LEDSTATUS      | Not used                    | Not used       | Not used          | Not used          | led4_supply_low             | led3_supply_low | led2_supply_low | led1_supply_low |
| 0X1A                   | PD_CFG         | Not used                    | Not used       | pd4               | pd3               | pd2                         | pd1             | pd_i1           | pd_i0           |
| 0X1B                   | PDOFFX_LED OFF | pdoffx_ledoff[7:0]          |                |                   |                   |                             |                 |                 |                 |
| 0X1C                   | PDOFFX_LED ON  | pdoffx_ledon[7:0]           |                |                   |                   |                             |                 |                 |                 |
| 0X1D                   | PD_AMPRC_CFG   | pd_ampres[2:0]              |                |                   | pd_ampcap[4:0]    |                             |                 |                 |                 |
| 0X1E                   | PD_AMPCFG      | pd_amp_en                   | pd_amp_auto    | pd_ampvo[3:0]     |                   |                             |                 | pd_ampcomp[1:0] |                 |
| 0X1F                   | PD_THRESHCFG   | pd_clipdetect_h_thresh[3:0] |                |                   |                   | pd_clipdetect_l_thresh[3:0] |                 |                 |                 |
| 0X30                   | SEQ_CNT        | seq_count[7:0]              |                |                   |                   |                             |                 |                 |                 |

| Addr | Name           | <D7>                            | <D6>     | <D5>     | <D4>     | <D3>     | <D2>     | <D1>           | <D0>           |
|------|----------------|---------------------------------|----------|----------|----------|----------|----------|----------------|----------------|
| 0X31 | SEQ_DIV        | seq_div[7:0]                    |          |          |          |          |          |                |                |
| 0X32 | SEQ_START      | Not used                        | Not used | Not used | Not used | Not used | Not used | seq_start_sync | seq_start      |
| 0X33 | SEQ_PER        | seq_period[7:0]                 |          |          |          |          |          |                |                |
| 0X34 | SEQ_LED_STA    | seq_led_seq_led_stop_start[7:0] |          |          |          |          |          |                |                |
| 0X35 | SEQ_LED_STO    | seq_led_stop[7:0]               |          |          |          |          |          |                |                |
| 0X36 | SEQ_SECLED_STA | seq_secled_start[7:0]           |          |          |          |          |          |                |                |
| 0X37 | SEQ_SECLED_STO | seq_secled_stop[7:0]            |          |          |          |          |          |                |                |
| 0X38 | SEQ_ITG_STA    | seq_itg_start[7:0]              |          |          |          |          |          |                |                |
| 0X39 | SEQ_ITG_STO    | seq_itg_stop[7:0]               |          |          |          |          |          |                |                |
| 0X3A | SEQ_SDP1_STA   | seq_sdp1_start[7:0]             |          |          |          |          |          |                |                |
| 0X3B | SEQ_SDP1_STO   | seq_sdp1_stop[7:0]              |          |          |          |          |          |                |                |
| 0X3C | SEQ_SDP2_STA   | seq_sdp2_start[7:0]             |          |          |          |          |          |                |                |
| 0X3D | SEQ_SDP2_STO   | seq_sdp2_stop[7:0]              |          |          |          |          |          |                |                |
| 0X3E | SEQ_SDM1_STA   | seq_sdm1_start[7:0]             |          |          |          |          |          |                |                |
| 0X3F | SEQ_SDM1_STO   | seq_sdm1_stop[7:0]              |          |          |          |          |          |                |                |
| 0X40 | SEQ_SDM2_STA   | seq_sdm2_start[7:0]             |          |          |          |          |          |                |                |
| 0X41 | SEQ_SDM2_STO   | seq_sdm2_stop[7:0]              |          |          |          |          |          |                |                |
| 0X42 | SEQ_ADC        | seq_adc[7:0]                    |          |          |          |          |          |                |                |
| 0X43 | SEQ_ADC2TIA    | seq_adc2tia[7:0]                |          |          |          |          |          |                |                |
| 0X44 | SEQ_ADC3TIA    | seq_adc3tia[7:0]                |          |          |          |          |          |                |                |
| 0X45 | SD_SUBS        | sd_subs[7:0]                    |          |          |          |          |          |                |                |
| 0X46 | SEQ_CFG        | Not used                        | Not used | Not used | Not used | Not used | Not used | Not used       | sd_subs_always |
| 0X47 | SEQ_ERR        | irq_adc_timing_error            | Not used | Not used | Not used | Not used | Not used | Not used       | Not used       |
| 0X60 | CYC_COUNTER    | cycle_counter[7:0]              |          |          |          |          |          |                |                |
| 0X60 | SEQ_COUNTER    | sequence_counter[7:0]           |          |          |          |          |          |                |                |
| 0X62 | SUBS_COUNTER   | subs_counter[7:0]               |          |          |          |          |          |                |                |

| Addr | Name        | <D7>                        | <D6>             | <D5>             | <D4>               | <D3>                        | <D2>            | <D1>               | <D0>                 |
|------|-------------|-----------------------------|------------------|------------------|--------------------|-----------------------------|-----------------|--------------------|----------------------|
| 0X50 | OFE_CFGA    | ofe2_en                     | ofe1_en          | en_bias_ofe      | aa_freq[1:0]       |                             | gain_sd[2:0]    |                    |                      |
| 0X51 | OFE_CFGB    | sd_clipdetect_h_thresh[3:0] |                  |                  |                    | sd_clipdetect_l_thresh[3:0] |                 |                    |                      |
| 0X52 | OFE_CFGC    | Not used                    | prefilter_aa_byp | prefilter_hp_byp | prefilter_gain_byp | prefilter_bypass_en         | prefilter_aa_en | prefilter_hp_en    | prefilter_gain_en    |
| 0X53 | OFE_CFGD    | Not used                    | Not used         | Not used         | Not used           | Not used                    | Not used        | ofe_gs_aa[1:0]     |                      |
| 0X54 | OFE1_CFGA   | ofe1_sd_pol_init            | ofe1_sd_en       | ofe1_hp_en       | ofe1_gain_en       | ofe1_sd_byp                 | ofe1_hp_byp     | ofe1_gain_byp      | ofe1_sd_hld          |
| 0X55 | OFE1_CFGB   | Not used                    | ofe1_gain_g[2:0] |                  |                    | ofe1_sd_bw[1:0]             |                 | ofe1_hp_freq[1:0]  |                      |
| 0X58 | OFE2_CFGA   | ofe2_sd_pol_init            | ofe2_sd_en       | ofe2_hp_en       | ofe2_gain_en       | ofe2_sd_byp                 | ofe2_hp_byp     | ofe2_gain_byp      | ofe2_sd_hld          |
| 0X59 | OFE2_CFGB   | Not used                    | ofe2_gain_g[2:0] |                  |                    | ofe2_sd_bw[1:0]             |                 | 2fe2_hp_freq[1:0]  |                      |
| 0X20 | LTFDATA0_L  | ltfdata0[7:0]               |                  |                  |                    |                             |                 |                    |                      |
| 0X21 | LTFDATA0_H  | ltfdata0[15:8]              |                  |                  |                    |                             |                 |                    |                      |
| 0X22 | LTFDATA1_L  | ltfdata0[7:0]               |                  |                  |                    |                             |                 |                    |                      |
| 0X23 | LTFDATA1_H  | ltfdata1[15:8]              |                  |                  |                    |                             |                 |                    |                      |
| 0X24 | ITIME       | itime[7:0]                  |                  |                  |                    |                             |                 |                    |                      |
| 0X25 | LTF_CONFIG  | infinite_time               | az_disable_auto  | reserved         | reserved           | Not used                    | Not used        | ltf_fifo_mode      | ltf_enable           |
| 0X26 | LTF_SEL     | Not used                    | ltf1_sel[2:0]    |                  |                    | Not used                    | ltf0_sel[2:0]   |                    |                      |
| 0X27 | LTF_GAIN    | Do not use                  | Do not use       | itime_unit[1:0]  |                    | ltf_gain[3:0]               |                 |                    |                      |
| 0X28 | LTF_CONTROL | Do not use                  | Do not use       | Do not use       | Do not use         | Do not use                  | Do not use      | Do not use         | ltf_start            |
| 0X29 | AZ_CONTROL  | Do not use                  | Do not use       | Do not use       | Do not use         | Do not use                  | Do not use      | az_enable_1        | az_enable_0          |
| 0X2A | OFFSET0     | offset0[7:0]                |                  |                  |                    |                             |                 |                    |                      |
| 0X2B | OFFSET1     | offset0[7:0]                |                  |                  |                    |                             |                 |                    |                      |
| 0X70 | AFE_CFG     | Do not use                  | Do not use       | Do not use       | Do not use         | afe_enable                  | afe_enable_dac  | afe_enable_dac_buf | afe_enable_gainstage |
| 0X80 | EAF_GST     | gpio_gst_in[2:0]            |                  |                  | gst_ref[1:0]       |                             | gst_gain[2:0]   |                    |                      |
| 0X81 | EAF_BIAS    | gpio_r_bias[2:0]            |                  |                  | Not used           | Not used                    | Not used        | Not used           | Not used             |
| 0X82 | EAF_DAC     | Do not use                  | Do not use       | Do not use       | sigref_on_dac_buf  | measure_dac                 | gpio_dac[2:0]   |                    |                      |
| 0X83 | EAF_DAC1_L  | dac1_value[]                |                  | Not used         | Not used           | Not used                    | Not used        | Not used           | Not used             |
| 0X84 | EAF_DAC1_H  | dac1_value[9:2]             |                  |                  |                    |                             |                 |                    |                      |
| 0X85 | EAF_DAC2_L  | dac2_value[1:0]             |                  | Not used         | Not used           | Not used                    | Not used        | Not used           | Not used             |
| 0X86 | EAF_DAC2_H  | dac2_value[9:2]             |                  |                  |                    |                             |                 |                    |                      |

| Addr | Name               | <D7>                     | <D6>                 | <D5>                  | <D4>                   | <D3>                   | <D2>                   | <D1>                    | <D0>                  |  |
|------|--------------------|--------------------------|----------------------|-----------------------|------------------------|------------------------|------------------------|-------------------------|-----------------------|--|
| 0X87 | EAF_DAC_CFG        | Not used                 | Not used             | Not used              | Not used               | Not used               | Not used               | dac_mode[1:0]           |                       |  |
| 0X5C | ECG_CFGA           | ecg_en                   | Not used             | ecg_lp_en             | ecg_hp_en              | ecg_gain_en            | ecg_lp_byp             | ecg_hp_byp              | ecg_gain_byp          |  |
| 0X5D | ECG_CFGB           | Not used                 | ecg_lp_freq[1:0]     |                       | ecg_hp_freq[1:0]       |                        | ecg_gain_g[2:0]        |                         |                       |  |
| 0X5E | ECG_CFGC           | Not used                 | Not used             | Not used              | Not used               | Not used               | Not used               | ecg_low_leakage_en      | ecg_ref_en            |  |
| 0X5F | ECG_CFGD           | Not used                 | Not used             | Not used              | ecg_lead_sdet_sync_adc | ecg_lead_sdet_pol      | ecg_leadsdet_curr[1:0] |                         | ecg_lead_sdet_en      |  |
| 0X68 | ADC_THRESHOLD      | adc_threshold[7:0]       |                      |                       |                        |                        |                        |                         |                       |  |
| 0X69 | ADC_THRESHOLD_CFG  | Not used                 | Not used             | Not used              | Not used               | Not used               | Not used               | adc_thresh_differential | adc_thresh_tiaonly    |  |
| 0X88 | ADC_CFGA           | Not used                 | Not used             | Not used              | Not used               | adc_multi_n[2:0]       |                        |                         | adc_multimode         |  |
| 0X89 | ADC_CFGB           | Not used                 | Not used             | adc_clock[2:0]        |                        |                        | adc_calibration        | ulp                     | adc_en                |  |
| 0X8A | ADC_CFGC           | Not used                 | Not used             | Not used              | adc_selfpd             | adc_disccharge         | adc_settling_time[2:0] |                         |                       |  |
| 0X8B | ADC_CHANNEL_MASK_L | adc_channel_mask_pregain | adc_channel_mask_afe | adc_channel_mask_temp | adc_channel_mask_sd2   | adc_channel_mask_ofe2  | adc_channel_mask_sd1   | adc_channel_mask_ofe1   | adc_channel_mask_tia  |  |
| 0X8C | ADC_CHANNEL_MASK_H | Not used                 | Not used             | Not used              | Not used               | adc_channel_mask_gpio2 | adc_channel_mask_gpio3 | adc_channel_mask_ecgi   | adc_channel_mask_ecgo |  |
| 0X8E | ADC_DATA_L         | adc_data[7:0]            |                      |                       |                        |                        |                        |                         |                       |  |
| 0X8F | ADC_DATA_H         | Not used                 | Not used             | adc_data[13:8]        |                        |                        |                        |                         |                       |  |
| 0X78 | FIFO_CFG           | Not used                 | Not used             | fifo_threshold[5:0]   |                        |                        |                        |                         |                       |  |
| 0X79 | FIFO_CNTRL         | Not used                 | Not used             | Not used              | Not used               | Not used               | Not used               | Not used                | fifo_clear            |  |
| 0XA3 | FIFOSTATUS         | fifooverflow             | Fifolevel[6:0]       |                       |                        |                        |                        |                         |                       |  |
| 0XFE | FIFOL              | Fifol[7:0]               |                      |                       |                        |                        |                        |                         |                       |  |
| 0XFF | FIFOH              | Fifoh[7:0]               |                      |                       |                        |                        |                        |                         |                       |  |
| 0x00 | CONTROL            | Not used                 | Not used             | Not used              | Not used               | Not used               | Not used               | osc_en                  | ldo_en                |  |
| 0X08 | GPIO_A             | Not used                 | Not used             | Not used              | Not used               | gpio3_a                | gpio2_a                | gpio1_a                 | gpio0_a               |  |
| 0X09 | GPIO_E             | Not used                 | Not used             | Not used              | Not used               | gpio3_e                | gpio2_e                | gpio1_e                 | gpio0_e               |  |
| 0X0A | GPIO_O             | Not used                 | Not used             | Not used              | Not used               | gpio3_o                | gpio2_o                | gpio1_o                 | gpio0_o               |  |
| 0X0B | GPIO_I             | Not used                 | Not used             | Not used              | Not used               | gpio3_i                | gpio2_i                | gpio1_i                 | gpio0_i               |  |
| 0X0C | GPIO_P             | gpio3_pd                 | gpio3_pu             | gpio2_pd              | gpio2_pu               | gpio1_pd               | gpio1_pu               | gpio0_pd                | gpio0_pu              |  |
| 0X0D | GPIO_SR            | Not used                 | Not used             | Not used              | Not used               | gpio3_sr               | gpio2_sr               | gpio1_sr                | gpio0_sr              |  |
| 0X91 | SUBID              | subid[4:0]               |                      |                       |                        |                        | Revision[2:0]          |                         |                       |  |
| 0X92 | ID                 | id[5:0]                  |                      |                       |                        |                        |                        | id_reserved[1:0]        |                       |  |

| Addr | Name       | <D7>                    | <D6>                | <D5>                  | <D4>                   | <D3>                   | <D2>            | <D1>               | <D0>            |
|------|------------|-------------------------|---------------------|-----------------------|------------------------|------------------------|-----------------|--------------------|-----------------|
| 0XA0 | STATUS     | irq_led_supply_low      | irq_clipdetect      | irq_fifooverflow      | irq_fifothreshold      | irq_adc_threshold      | irq_ltf         | irq_sequencer      | irq_adc         |
| 0XA1 | CLIPSTATUS | Not used                | Not used            | Not used              | Not used               | pd_clipdetect_l        | pd_clipdetect_h | sd_clipdetect_l    | sd_clipdetect_h |
| 0XA2 | LEDSTATUS  | Not used                | Not used            | Not used              | Not used               | led4_supply_low        | led3_supply_low | led2_supply_low    | led1_supply_low |
| 0XA8 | INTENAB    | irq_led_supply_low_enab | irq_clipdetect_enab | irq_fifooverflow_ena  | irq_fifothreshold_enab | irq_adc_threshold_enab | irq_ltf_enab    | irq_sequencer_enab | irq_adc_enab    |
| 0XA9 | INTR       | irq_led_supply_low_intr | irq_clipdetect_intr | irq_fifooverflow_intr | irq_fifothreshold_intr | irq_adc_threshold_intr | irq_ltf_intr    | irq_sequencer_intr | irq_adc_intr    |



**LED1\_CURRL Register (Address 0x12)**

Figure 12:  
LED1\_CURRL Register

| Addr: 0x12 |            | LED1_CURRL |        |                                  |
|------------|------------|------------|--------|----------------------------------|
| Bit        | Bit Name   | Default    | Access | Bit Description                  |
| 7:6        | Curr1[1:0] | 0          | RW     | LED1 output current lower 2 bits |
| 5:0        | Not used   | 0          | RW     | Not used                         |

**LED1\_CURRH Register (Address 0x13)**

Figure 13:  
LED1\_CURRH Register

| Addr: 0x13 |            | LED1_CURRH |        |  |
|------------|------------|------------|--------|--|
| Bit        | Bit Name   | Default    | Access | Bit Description  |
| 7:0        | Curr1[9:2] | 0          | RW     | LED1 output current upper 8 bits<br>Coding for curr1[9:0]:<br>000h ... 786 $\mu$ A<br>001h ... 883 $\mu$ A (1 LSB=97 $\mu$ A)<br>002h ... 980 $\mu$ A<br>166h ... 35 mA<br>3FFh ... 100 mA |

**LED2\_CURRL Register (Address 0x14)**

Figure 14:  
LED2\_CURRL Register

| Addr: 0x14 |            | LED2_CURRL |        |                                  |
|------------|------------|------------|--------|----------------------------------|
| Bit        | Bit Name   | Default    | Access | Bit Description                  |
| 7:6        | Curr2[1:0] | 0          | RW     | LED2 output current lower 2 bits |
| 5:0        | Not used   | 0          | RW     | Not used                         |

**LED2\_CURRH Register (Address 0x15)**

Figure 12:  
LED2\_CURRH Register

| Addr: 0x15 |            | LED2_CURRH |        |  |
|------------|------------|------------|--------|--|
| Bit        | Bit Name   | Default    | Access | Bit Description  |
| 7:0        | Curr2[9:2] | 0          | RW     | LED2 output current upper 8 bits<br>Coding for curr1[9:0]:<br>000h ... 786 $\mu$ A<br>001h ... 883 $\mu$ A (1 LSB=97 $\mu$ A)<br>002h ... 980 $\mu$ A<br>166h ... 35 mA<br>3FFh ... 100 mA |

**LED3\_CURRL Register (Address 0x16)**

Figure 13:  
LED3\_CURRL Register

| Addr: 0x16 |            | LED3_CURRL |        |                                  |
|------------|------------|------------|--------|----------------------------------|
| Bit        | Bit Name   | Default    | Access | Bit Description                  |
| 7:6        | Curr3[1:0] | 0          | RW     | LED3 output current lower 2 bits |
| 5:0        | Not used   | 0          | RW     | Not used                         |

**LED3\_CURRH Register (Address 0x17)**

Figure 14:  
LED3\_CURRH Register

| Addr: 0x17 |            | LED3_CURRH |        |  |
|------------|------------|------------|--------|--|
| Bit        | Bit Name   | Default    | Access | Bit Description  |
| 7:0        | Curr3[9:2] | 0          | RW     | LED3 output current upper 8 bits<br>Coding for curr1[9:0]:<br>000h ... 786 $\mu$ A<br>001h ... 883 $\mu$ A (1 LSB=97 $\mu$ A)<br>002h ... 980 $\mu$ A<br>166h ... 35 mA<br>3FFh ... 100 mA |



**LED4\_CURRL Register (Address 0x18)**

Figure 15:  
LED4\_CURRL Register

| Addr: 0x18 |            | LED4_CURRL |        |                                  |
|------------|------------|------------|--------|----------------------------------|
| Bit        | Bit Name   | Default    | Access | Bit Description                  |
| 7:6        | Curr4[1:0] | 0          | RW     | LED4 output current lower 2 bits |
| 5:0        | Not used   | 0          | RW     | Not used                         |

**LED4\_CURRH Register (Address 0x19)**

Figure 16:  
LED4\_CURRH Register

| Addr: 0x19 |            | LED4_CURRH |        |  |
|------------|------------|------------|--------|--|
| Bit        | Bit Name   | Default    | Access | Bit Description  |
| 7:0        | Curr4[9:2] | 0          | RW     | LED4 output current upper 8 bits<br>Coding for curr1[9:0]:<br>000h ... 786 $\mu$ A<br>001h ... 883 $\mu$ A (1 LSB=97 $\mu$ A)<br>002h ... 980 $\mu$ A<br>166h ... 35 mA<br>3FFh ... 100 mA |

**LED12\_MODE Register (Address 0x2c)**

Figure 17:  
LED12\_MODE Register

| Addr: 0x2c |                                    | LED12_MODE |        |   |          |          |     |            |     |                                    |
|------------|------------------------------------|------------|--------|---|----------|----------|-----|------------|-----|------------------------------------|
| Bit        | Bit Name                           | Default    | Access | Bit Description   |          |          |     |            |     |                                    |
| 7          | Man-sw_led2                        | 0          | RW     | 0 ... LED output D2 disabled. (High impedance)<br>1 ... LED output D2 enabled   |          |          |     |            |     |                                    |
| 6.4        | Led2_mode                          | 0          | RW     | LED2 mode<br><table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">Settings</th> <th style="width: 50%;">Behavior</th> </tr> </thead> <tbody> <tr> <td>000</td> <td>Always OFF</td> </tr> <tr> <td>001</td> <td>Always ON when sequencer is active</td> </tr> </tbody> </table> | Settings | Behavior | 000 | Always OFF | 001 | Always ON when sequencer is active |
| Settings   | Behavior                           |            |        |   |          |          |     |            |     |                                    |
| 000        | Always OFF                         |            |        |   |          |          |     |            |     |                                    |
| 001        | Always ON when sequencer is active |            |        |   |          |          |     |            |     |                                    |

| Addr: 0x2c |             | LED12_MODE |        |  |   |
|------------|-------------|------------|--------|--|---|
| Bit        | Bit Name    | Default    | Access | Bit Description  |   |
|            |             |            |        | 010  | Controlled by sequencer   |
|            |             |            |        | 011  | Controlled by sequencer, only ON in even iterations: 0, 2, 4 etc.                       |
|            |             |            |        | 100  | Controlled by sequencer, only ON in odd iterations: 1, 3, 5 etc.                        |
|            |             |            |        | 101  | Controlled by sequencer, only ON in every fourth iteration, starting at 1: 1, 5, 9 etc. |
|            |             |            |        | 110  | Controlled by sequencer: secondary LED timing   |
|            |             |            |        | 111  | Do not use  |
| 3          | Man_sw_led1 | 0          | RW     | 0 ... LED output D1 disabled. (High impedance)<br>1 ... LED output D1 enable |   |
|            |             |            |        | LED1 mode  |   |
|            |             |            |        | <b>Settings</b>  | <b>Behavior</b>   |
|            |             |            |        | 000  | Always OFF  |
|            |             |            |        | 001  | Always ON when sequencer is active  |
|            |             |            |        | 010  | Controlled by sequencer   |
|            |             |            |        | 011  | Controlled by sequencer, only ON in even iterations: 0, 2, 4 etc.                       |
|            |             |            |        | 100  | Controlled by sequencer, only ON in odd iterations: 1, 3, 5 etc.                        |
|            |             |            |        | 101  | Controlled by sequencer, only ON in every fourth iteration, starting at 1: 1, 5, 9 etc. |
|            |             |            |        | 110  | Controlled by sequencer: secondary LED timing   |
|            |             |            |        | 111  | Do not use  |
| 2.0        | Led1_mode   | 0          | RW     |  |   |

**LED34\_MODE Register (Address 0x2d)**
**Figure 18:**  
**LED34\_MODE Register**

| Addr: 0x2d |             | LED34_MODE      |        |   |
|------------|-------------|-----------------|--------|---|
| Bit        | Bit Name    | Default         | Access | Bit Description   |
| 7          | Man-sw_led4 | 0               | RW     | 0 ... LED output D4 disabled. (High impedance)<br>1 ... LED output D4 enabled           |
| LED4 mode  |             |                 |        |   |
|            |             | <b>Settings</b> |        | <b>Behavior</b>   |
|            |             | 000             |        | Always OFF  |
|            |             | 001             |        | Always ON when sequencer is active  |
|            |             | 010             |        | Controlled by sequencer   |
|            |             | 011             |        | Controlled by sequencer, only ON in even iterations: 0, 2, 4 etc.                       |
| 6.4        | Led4_mode   | 0               | RW     | 100 Controlled by sequencer, only ON in odd iterations: 1, 3, 5 etc.                    |
|            |             | 101             |        | Controlled by sequencer, only ON in every fourth iteration, starting at 1: 1, 5, 9 etc. |
|            |             | 110             |        | Controlled by sequencer: secondary LED timing   |
|            |             | 111             |        | Do not use  |
| 3          | Man_sw_led3 | 0               | RW     | 0 ... LED output D3 disabled. (High impedance)<br>1 ... LED output D3 enable            |
| LED3 mode  |             |                 |        |   |
|            |             | <b>Settings</b> |        | <b>Behavior</b>   |
|            |             | 000             |        | Always OFF  |
|            |             | 001             |        | Always ON when sequencer is active  |
|            |             | 010             |        | Controlled by sequencer   |
|            |             | 011             |        | Controlled by sequencer, only ON in even iterations: 0, 2, 4 etc.                       |
| 2.0        | Led3_mode   | 0               | RW     | 100 Controlled by sequencer, only ON in odd iterations: 1, 3, 5 etc.                    |
|            |             | 101             |        | Controlled by sequencer, only ON in every fourth iteration, starting at 1: 1, 5, 9 etc. |
|            |             | 110             |        | Controlled by sequencer: secondary LED timing   |
|            |             | 111             |        | Do not use  |

The MAN\_SEQ\_CFG register is used to configure the operation of the optical front end

**MAN\_SEQ\_CFG Register (Address 0x2e)**

**Figure 19:**  
MAN\_SEQ\_CFG Register

| Addr: 0x2e |                | MAN_SEQ_CFG   |               |  |               |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
|------------|----------------|---------------|---------------|--|---------------|------------|---------------|---------------|---------------|---------------|---|----|-----|-----|-----|-----|---|---|----|----|----|----|--|
| Bit        | Bit Name       | Default       | Access        | Bit Description  |               |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
| 7          | man_mode       | 0             | RW            | 0 ... Enables Sequencer<br>1 ... Enables Manual control of optical front end   |               |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
| 6          | man_sw_sd mult | 0             | RW            | If man_mode=1<br>0 ... Disables synchronous demodulator multiplication<br>1 ... Enables synchronous demodulator multiplication   |               |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
| 5          | man_sw_sd pol  | 0             | RW            | If man_mode=1<br>0 ... Negative polarity in synchronous demodulator multiplication<br>1 ... Positive polarity in synchronous demodulator multiplication  |               |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
| 4          | man_sw_itg     | 0             | RW            | If man_mode=1<br>0 ... All integrator capacitors are shorted. Integrator is reset<br>1 ... Integrator capacitors are charging up. Integrator is running  |               |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
| 3:1        | diode_ctrl     | 0             | RW            | Connection of Photodiodes PD1, PD2, PD3, PD4 to the photodiode amplifier.<br>0 ... PD1-PD4 are connected<br>1 ... PD1 synchronous to LED1, PD2 sync/to LED2 PD3 sync/to LED3, PD4 sync/to LED4<br>2 ... PD1 synchronous to LED1, PD2 sync/to LED1 PD3 sync/to LED2, PD4 sync/to LED2<br>3 ... PD1 synchronous to LED1, PD2 sync/to LED1 PD3 sync/to LED4, PD4 sync/to LED4<br>4 ... SPO2 mode *(obsolete): (negedge(sdm1) or negedge(sdp1)) - PD1=0 PD2=0 PD3=1 PD4=1; (negedge(sdm2) or negedge(sdp2)) - PD1=1 PD2=1 PD3=0 PD4=0<br>Note that PD_CFG.pdX takes precedence - to turn OFF one photo diode, the respective bit has to be de-asserted in the PD_CFG register. |               |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
|            |                |               |               | <table border="1"> <thead> <tr> <th>PD_CFG.pdX</th> <th>diode_ctrl</th> <th>Photo Diode 1</th> <th>Photo Diode 2</th> <th>Photo Diode 3</th> <th>Photo Diode 4</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>xx</td> <td>OFF</td> <td>OFF</td> <td>OFF</td> <td>OFF</td> </tr> <tr> <td>1</td> <td>0</td> <td>ON</td> <td>ON</td> <td>ON</td> <td>ON</td> </tr> </tbody> </table>  | PD_CFG.pdX    | diode_ctrl | Photo Diode 1 | Photo Diode 2 | Photo Diode 3 | Photo Diode 4 | 0 | xx | OFF | OFF | OFF | OFF | 1 | 0 | ON | ON | ON | ON |  |
| PD_CFG.pdX | diode_ctrl     | Photo Diode 1 | Photo Diode 2 | Photo Diode 3  | Photo Diode 4 |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
| 0          | xx             | OFF           | OFF           | OFF  | OFF           |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |
| 1          | 0              | ON            | ON            | ON   | ON            |            |               |               |               |               |   |    |     |     |     |     |   |   |    |    |    |    |  |

| Addr: 0x2e |          | MAN_SEQ_CFG |        |   |      |                      |      |      |      |
|------------|----------|-------------|--------|---|------|----------------------|------|------|------|
| Bit        | Bit Name | Default     | Access | Bit Description                                     |      |                      |      |      |      |
|            |          |             |        | 1   | 1    | LED1                 | LED2 | LED3 | LED4 |
|            |          |             |        | 1   | 2    | LED1                 | LED1 | LED2 | LED2 |
|            |          |             |        | 1   | 3    | LED1                 | LED1 | LED4 | LED4 |
|            |          |             |        | 1   | 4    | SPO2 mode (obsolete) |      |      |      |
|            |          |             |        | 1   | 5..7 | Do not use           |      |      |      |
| 0          | seq_en   | 0           | RW     | 0 ... Disables sequencer<br>1 ... Enables sequencer |      |                      |      |      |      |

### LEDSTATUS Register (Address 0xa2)

Figure 20:  
LEDSTATUS Register

| Addr: 0xa2 |                 | LED4_CURRL |        |   |  |
|------------|-----------------|------------|--------|---|--|
| Bit        | Bit Name        | Default    | Access | Bit Description   |  |
| 7:4        | NA              | 0          | RO     | Not Used  |  |
| 3          | led4_supply_low | 0          | RO     | If this bit is asserted, LED4 voltage has been too low. |  |
| 2          | led3_supply_low | 0          | RO     | If this bit is asserted, LED3 voltage has been too low. |  |
| 1          | led2_supply_low | 0          | RO     | If this bit is asserted, LED2 voltage has been too low. |  |
| 0          | led1_supply_low | 0          | RO     | If this bit is asserted, LED1 voltage has been too low. |  |


An asserted bit can be cleared by writing a '1' to the irq\_led\_supply\_low bit.

## 7.1.2 Photodiode Selection

In order to have flexible arrangement of the use photodiodes, PD1-PD4 can be individually connected to the photodiode amplifier input. The optional offset current allows cancellation of constant light sources like sunlight. In case of an external photodiode or any other sensor with (low) current output, the pins GPIO0 and GPIO1 can be used as input.

Additionally the sequencer can control the diodes – see diode\_ctrl described in register MAN\_SEQ\_CFG.

Figure 21:  
Photodiode Selection

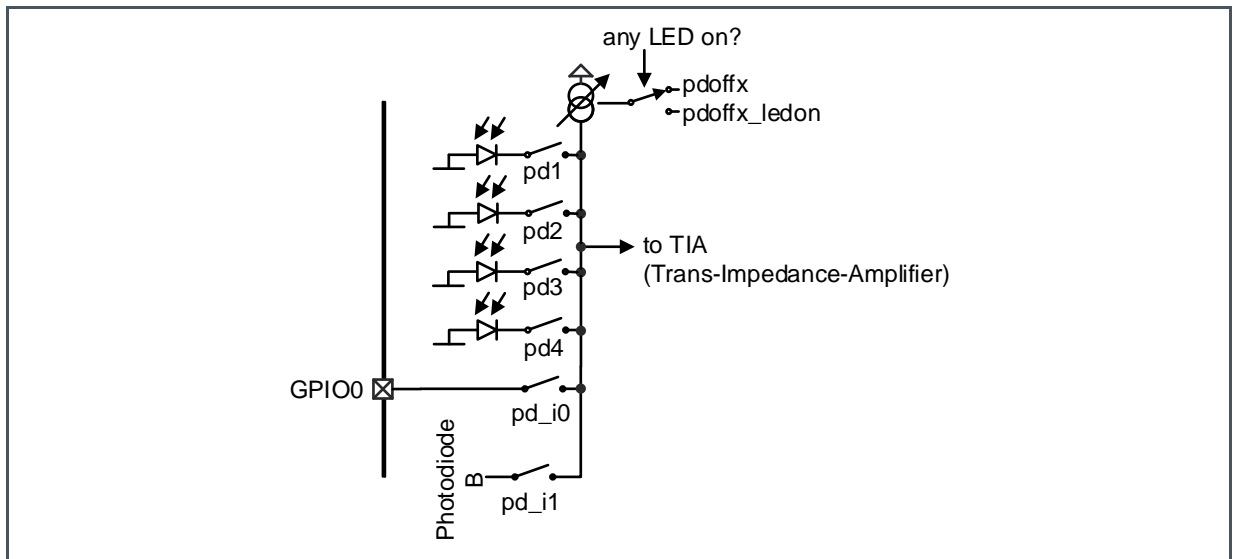

PD\_CFG Register (Address 0x1a)

Figure 22:  
PD\_CFG Register

| Addr: 0x1a |          | PD_CFG  |        |  |
|------------|----------|---------|--------|--|
| Bit        | Bit Name | Default | Access | Bit Description  |
| 7:6        | NA       | 0       | RW     | Not Used   |
| 5          | pd4      | 0       | RW     | 0 ... Photodiode PD4 is disconnected from photo amplifier<br>1 ... Photodiode PD4 is connected to photo amplifier (as defined in diode_ctrl) |
| 4          | pd3      | 0       | RW     | 0 ... Photodiode PD3 is disconnected from photo amplifier<br>1 ... Photodiode PD3 is connected to photo amplifier (as defined in diode_ctrl) |
| 3          | pd2      | 0       | RW     | 0 ... Photodiode PD2 is disconnected from photo amplifier<br>1 ... Photodiode PD2 is connected to photo amplifier (as defined in diode_ctrl) |
| 2          | pd1      | 0       | RW     | 0 ... Photodiode PD1 is disconnected from photo amplifier<br>1 ... Photodiode PD1 is connected to photo amplifier (as defined in diode_ctrl) |

| Addr: 0x1a |          | PD_CFG  |        |   |
|------------|----------|---------|--------|---|
| Bit        | Bit Name | Default | Access | Bit Description   |
| 1          | pd_i1    | 0       | RW     | 0... Photodiode B (see Photodiode Characteristics) disconnected from TIA input<br>1... Photodiode B (see Photodiode Characteristics) connected to TIA input; set ltf1_sel=0 and ltf2_sel=0. |
| 0          | pd_i0    | 0       | RW     | 0 ... GPIO0-input is disconnected from photo amplifier<br>1 ... GPIO0-input is connected to photo amplifier; set gpio_a[0]=1.   |

**PDOFFX\_LED OFF Register (Address 0x1b)**

Figure 23:  
PDOFFX\_LED OFF Register

| Addr: 0x1b |               | PDOFFX_LED OFF |        |  |
|------------|---------------|----------------|--------|--|
| Bit        | Bit Name      | Default        | Access | Bit Description  |
| 7:0        | pdoffx_ledoff | 0              | RW     | Input offset current if all LEDs are OFF (all sw_led* sequencer outputs are zero)<br>offset = pdoffx_ledoff*10 nA<br>0 ... Offset source is turned OFF |


**PDOFFX\_LED ON Register (Address 0x1c)**

Figure 24:  
PDOFFX\_LED ON Register

| Addr: 0x1c |              | PDOFFX_LED ON |        |  |
|------------|--------------|---------------|--------|--|
| Bit        | Bit Name     | Default       | Access | Bit Description  |
| 7:0        | pdoffx_ledon | 0             | RW     | Input offset current if at least one LED is ON (one or more sw_led* sequencer outputs are non-zero)<br>offset = pdoffx_ledon*10nA<br>0 ... Offset source is turned OFF |

### 7.1.3 Photodiode Characteristics


Figure 25:  
Photodiode Arrangement –Orientation as in Figure 2

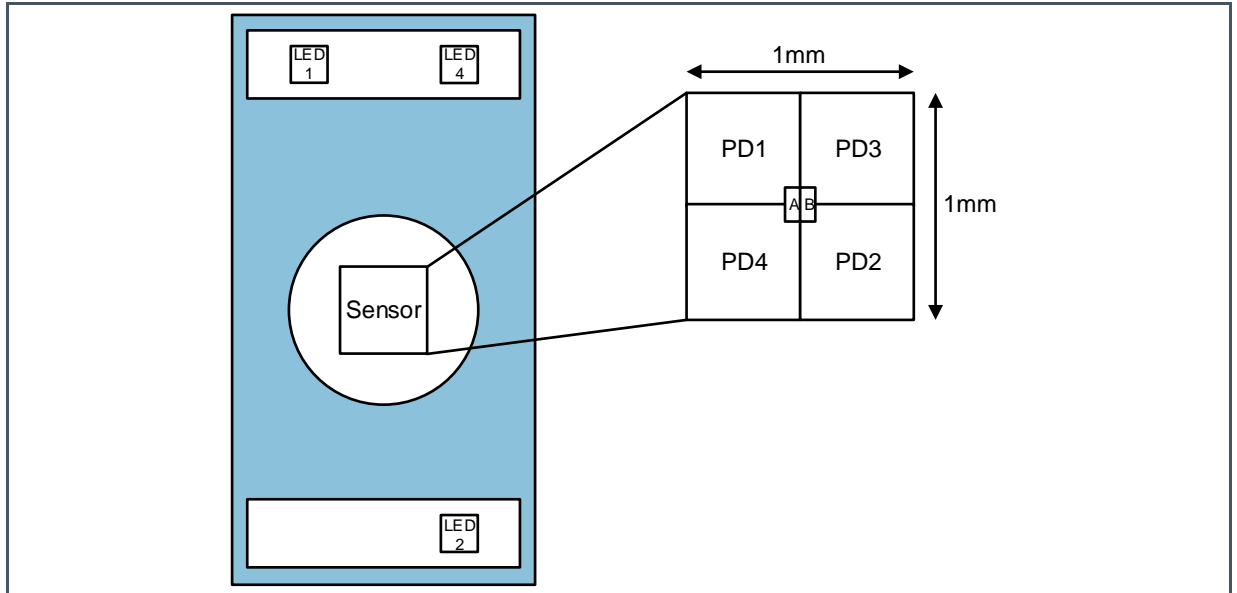

For operation and characteristics of photodiode 'A' and photodiode 'B' see section 7.1.12 Light-to-Frequency Mode.



Figure 26:  
Photodiode Sensitivity (solid green and black) and LED Emission Spectrum (dotted green and dotted black)

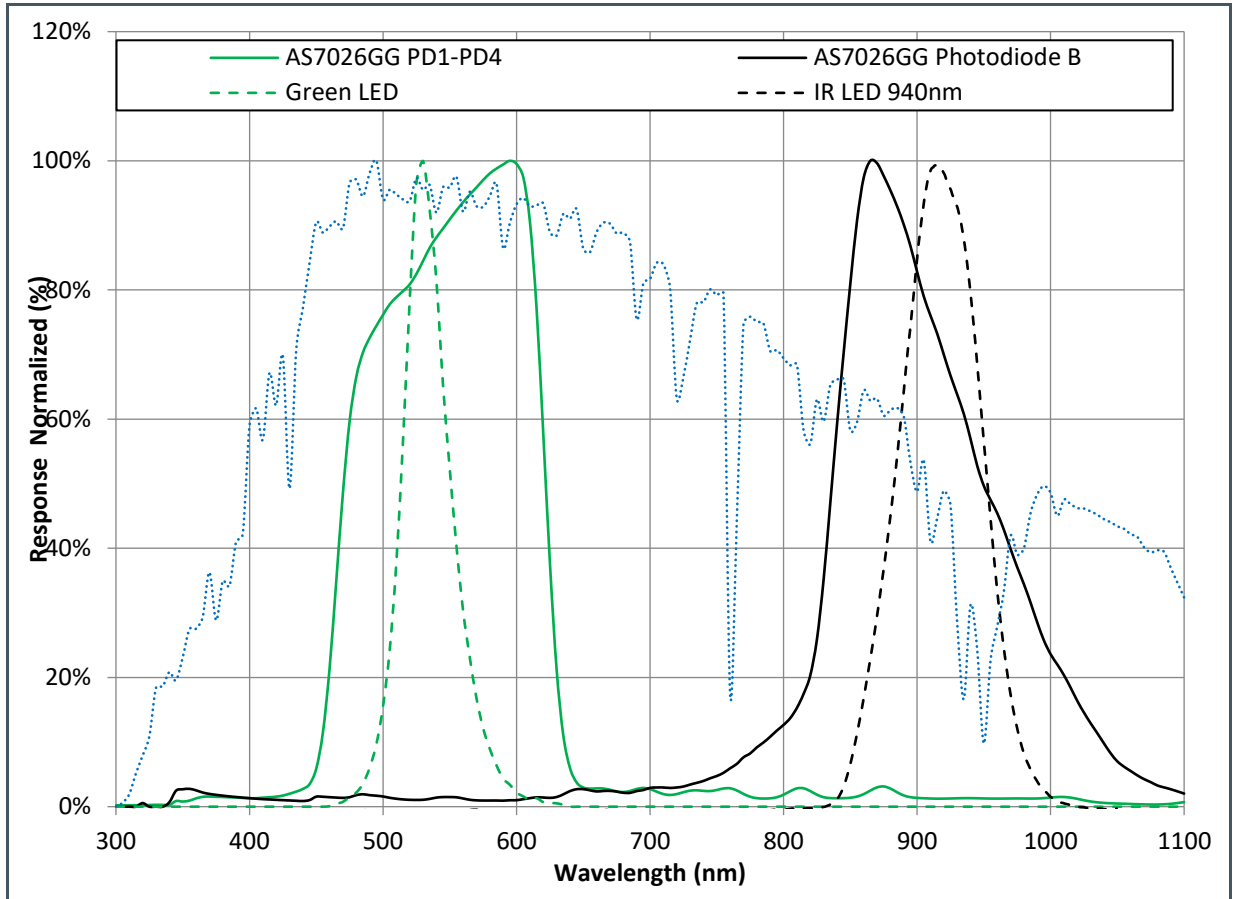

**Information**


All 4 photodiodes used  $pd1/2/3/4=1$ ; perpendicular light source and no diffuser used on AS7026GG; due to the difference in photodiode size the absolute response for Photodiode B ( $0.01 \text{ mm}^2$ ) is much lower compared to PD1-PD4 ( $0.8 \text{ mm}^2$ )

**7.1.4 Photodiode Transimpedance Amplifier (TIA)**

The photodiode amplifier can be configured in three different modes:

- Photocurrent to frequency converter – see section 7.1.12 Light-to-Frequency Mode
- Photocurrent to voltage converter
- Photocurrent integrator

Figure 27:  
Transimpedance Amplifier (TIA)

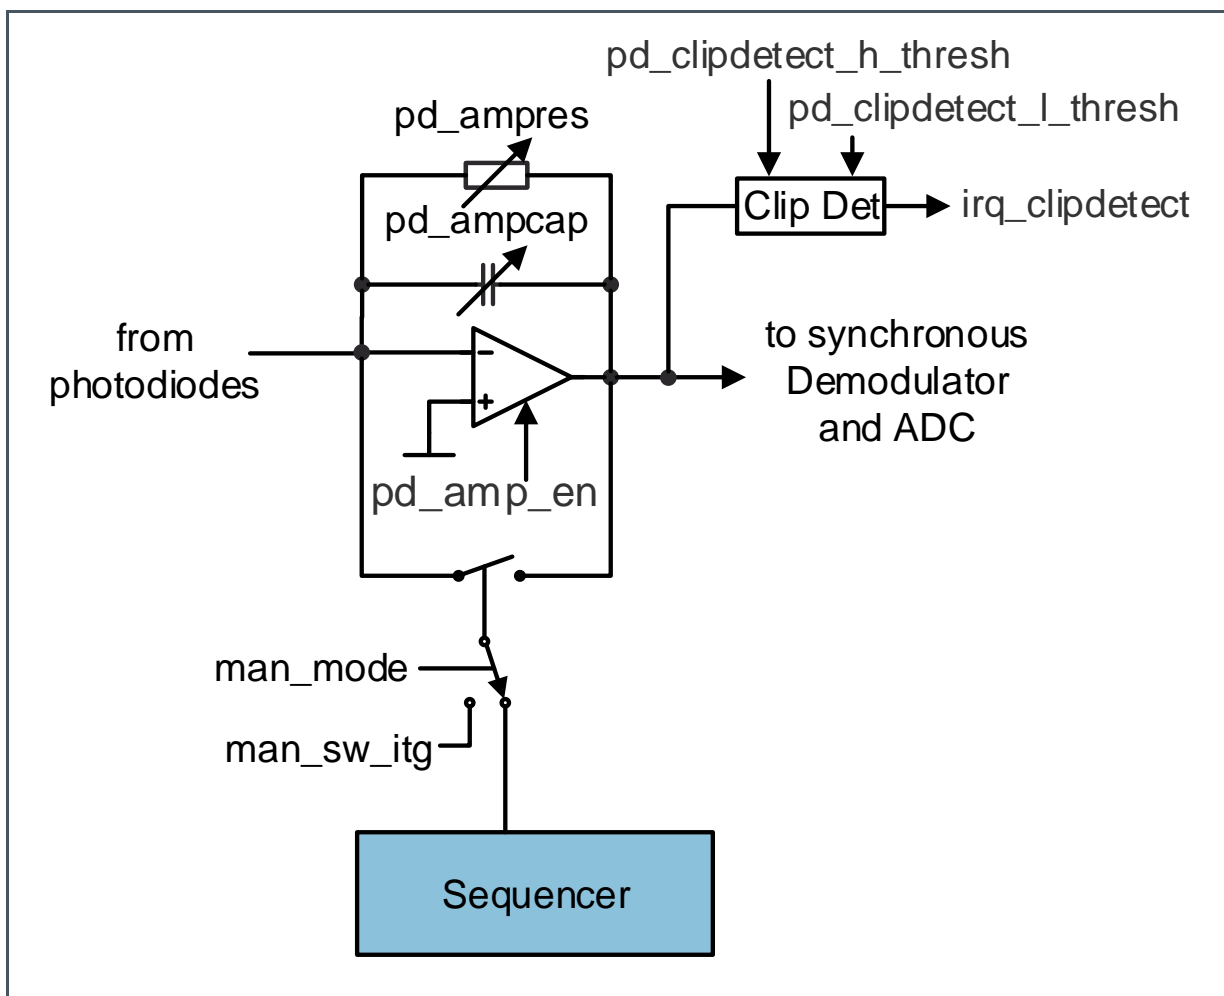

The integration time  $t_{INT}$  is defined either by the sequencer (`man_mode=0`) or manually through the bit `sw_itg` if `man_mode=1`.

Use following settings for the programming of the TIA:

**Figure 28:**  
**TIA Programming**

| pd_ampres                             | pd12341 | pd_ampcap | pd_ampcomp | pd_ampvo | gain          |
|---------------------------------------|---------|-----------|------------|----------|---------------|
| 1                                     | 1...4   | 13        | 1          | 15       | 1 V/ $\mu$ A  |
| 2                                     | 1...4   | 7         | 1          | 15       | 2 V/ $\mu$ A  |
| 3                                     | 1...4   | 5         | 1          | 15       | 3 V/ $\mu$ A  |
| 4                                     | 1...2   | 2         | 0          | 15       | 5 V/ $\mu$ A  |
|                                       | 3...4   | 3         |            |          |               |
| 5                                     | 1...2   | 2         | 0          | 15       | 7 V/ $\mu$ A  |
|                                       | 3...4   | 3         |            |          |               |
| 6                                     | 1       | 1         | 0          | 15       | 10 V/ $\mu$ A |
|                                       | 2...4   | 2         |            |          |               |
| 7                                     | 1...2   | 1         | 0          | 15       | 15 V/ $\mu$ A |
|                                       | 3...4   | 2         |            |          |               |
| <b>Low Bandwidth Mode</b>             |         |           |            |          |               |
| 5                                     | 1...4   | 31        | 3          | 15       | 7 V/ $\mu$ A  |
| <b>Integrating Mode (pd_ampres=0)</b> |         |           |            |          |               |
| 0                                     | 1...4   | 10        | 3          | 15       | 1 V/pQ        |
| 0                                     | 1...4   | 20        | 3          | 15       | 1/2V/pQ       |
| 0                                     | 1...4   | 30        | 3          | 15       | 1/3V/pQ       |

### 7.1.5 Photodiode TIA Registers

#### PD\_AMPRCCFG Register (Address 0x1d)

Figure 29:  
PD\_AMPRCCFG Register

| Addr: 0x1d |  | PD_AMPRCCFG |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
|------------|--|-------------|--------|---|---------|------------|---|--|---|------|---|------|---|------|---|------|---|------|---|-------|---|-------|
| Bit        | Bit Name   | Default     | Access | Bit Description   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
|            |  |             |        | Feedback resistor   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
|            |  |             |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Resistance</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No resistor in feedback of amplifier – photocurrent integrator</td> </tr> <tr> <td>1</td> <td>1 MΩ</td> </tr> <tr> <td>2</td> <td>2 MΩ</td> </tr> <tr> <td>3</td> <td>3 MΩ</td> </tr> <tr> <td>4</td> <td>5 MΩ</td> </tr> <tr> <td>5</td> <td>7 MΩ</td> </tr> <tr> <td>6</td> <td>10 MΩ</td> </tr> <tr> <td>7</td> <td>15 MΩ</td> </tr> </tbody> </table> | Setting | Resistance | 0 | No resistor in feedback of amplifier – photocurrent integrator | 1 | 1 MΩ | 2 | 2 MΩ | 3 | 3 MΩ | 4 | 5 MΩ | 5 | 7 MΩ | 6 | 10 MΩ | 7 | 15 MΩ |
| Setting    | Resistance   |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 0          | No resistor in feedback of amplifier – photocurrent integrator |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 1          | 1 MΩ   |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 2          | 2 MΩ   |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 3          | 3 MΩ   |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 4          | 5 MΩ   |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 5          | 7 MΩ   |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 6          | 10 MΩ  |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 7          | 15 MΩ  |             |        |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 7:5        | pd_ampres  | 0           | RW     |   |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |
| 4:0        | pd_ampcap  |             |        | Feedback capacitor  |         |            |   |  |   |      |   |      |   |      |   |      |   |      |   |       |   |       |

The PD\_AMPCFG register is used to configure the operating mode of the photoamplifier.

#### PD\_AMPCFG Register (Address 0x1e)

Figure 30:  
PD\_AMPCFG Register

| Addr: 0x1e |             | PD_AMPCFG |        |   |
|------------|-------------|-----------|--------|---|
| Bit        | Bit Name    | Default   | Access | Bit Description   |
| 7          | pd_amp_en   | 0         | RW     | 0 ... Activates power down mode of photo-amplifier<br>1 ... Enables photo-amplifier (direct or automatic pd_amp_auto mode) also set en_bias_ofe=1 |
| 6          | pd_amp_auto | 0         | RW     | 0 ... Normal TIA mode<br>1 ... Enable TIA only when seq_itg is set (i.e. controlled by sequencer itg setting) also set en_bias_ofe=1              |

| Addr: 0x1e |            | PD_AMPCFG |        |   |  |
|------------|------------|-----------|--------|---|--|
| Bit        | Bit Name   | Default   | Access | Bit Description   |  |
| 5:2        | pd_ampvo   | 1         | RW     | OpAmp offset. Can be used to limit signal in darkness and to shorten rise times                   |  |
| 1:0        | pd_ampcomp | 3         | RW     | OpAmp compensation, depending on gain and number of used photo diodes Capacitor = pd_ampcap*0.1pF |  |

**PD\_THRESHCFG Register (Address 0x1f)**

Figure 31:  
PD\_THRESHCFG Register

| Addr: 0x1f |                        | PD_THRESHCFG |        |  |  |
|------------|------------------------|--------------|--------|--|--|
| Bit        | Bit Name               | Default      | Access | Bit Description  |  |
| 7:4        | pd_clipdetect_h_thresh | 0            | RW     | <p>If the voltage on the output of the TIA exceed this threshold the irq_clipdetect interrupt is asserted. The threshold is defined as</p> <p>0 ... 1824 mV<br/>           1 ... 1748 mV<br/>           2 ... 1672 mV<br/>           3 ... 1596 mV<br/>           4 ... 1520 mV<br/>           5 ... 1444 mV<br/>           6 ... 1368 mV<br/>           7 ... 1292 mV<br/>           8 ... 1216 mV<br/>           9 ... 1140 mV<br/>           10 ... 1064 mV<br/>           11... 988 mV<br/>           12 ... 912 mV<br/>           13 ... 836 mV<br/>           14 ... 760 mV<br/>           15 ... 684 mV</p> |  |
| 3:0        | pd_clipdetect_l_thresh | 0            | RW     | <p>If the voltage on the output of the TIA falls below this threshold the irq_clipdetect interrupt is asserted. The threshold is defined as</p> <p>0 ... 67 mV<br/>           1 ... 143 mV<br/>           2 ... 219 mV</p>   |  |

| Addr: 0x1f |          | PD_THRESCFG |        |                 |
|------------|----------|-------------|--------|-----------------|
| Bit        | Bit Name | Default     | Access | Bit Description |
|            |          |             |        | 3 ... 295 mV    |
|            |          |             |        | 4 ... 371 mV    |
|            |          |             |        | 5 ... 447 mV    |
|            |          |             |        | 6 ... 523 mV    |
|            |          |             |        | 7 ... 599 mV    |
|            |          |             |        | 8 ... 675 mV    |
|            |          |             |        | 9 ... 751 mV    |
|            |          |             |        | 10 ... 827 mV   |
|            |          |             |        | 11 ... 903 mV   |
|            |          |             |        | 12 ... 979 mV   |
|            |          |             |        | 13 ... 1055 mV  |
|            |          |             |        | 14 ... 1131 mV  |
|            |          |             |        | 15 ... 1207 mV  |

### 7.1.6 Voltage Mode of the Photodiode Amplifier

The output voltage of the photodiode amplifier is depending on the feedback component.

Equation 1:

$$U_{out} = I_{photo} \cdot R_{fb} \quad \text{Feedback resistor}$$

Equation 2:


$$U_{out} = I_{photo} \cdot \frac{t_{INT}}{C_{fb}} \quad \text{Feedback capacitor}$$



#### Information

The integration time  $t_{INT}$  is defined either by the sequencer ( $man\_mode=0$ ) or manually through the bit  $sw\_itg$  if  $man\_mode=1$ . For the synchronous demodulator only use the resistive feedback.

**Figure 32:**  
**Difference Between Resistive and Capacitive Feedback**

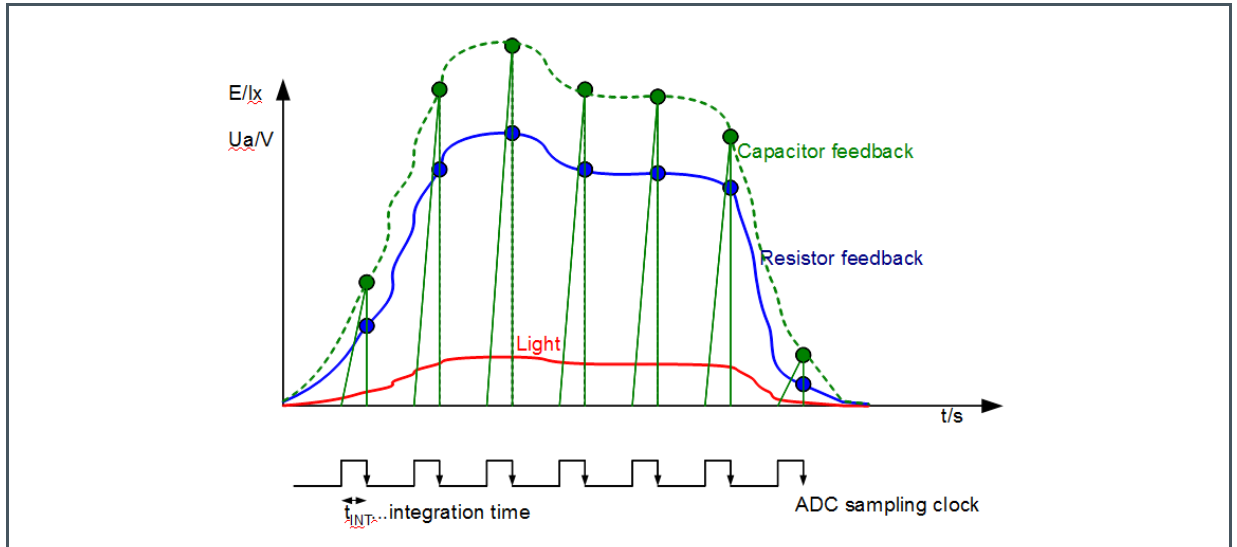

- (1) **Green:** Capacitive Integration
- Green Dotted:** Effective Value from Capacitive Mode
- Blue:** Resistive Feedback
- Red:** Light Intensity


### 7.1.7 Optical Front End Operating Modes

Once the photodiode amplifier is configured the measurement can be done in two different ways. Either the LED-outputs, the photodiode amplifier and the ADC are controlled manually by means of register bits, or they are controlled by a built in sequencer.

#### Manual Operation of the Optical Frontend:

The optical front end can be manually controlled via the register `man_mode=1`

**Figure 33:**  
**Optical Frontend**

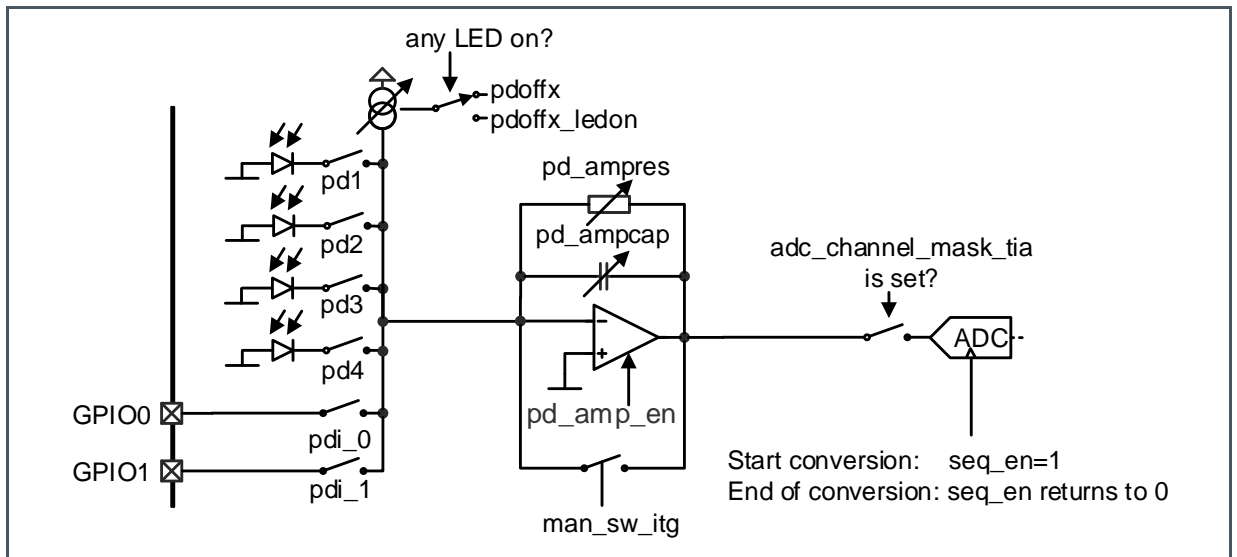

(1) Applies only if man\_mode=1.

For manual operation of the LEDs and its current sinks see 6.1.2 LED-Driver

### 7.1.8 Sequencer

In order to synchronize the LED-currents, the integration time and the ADC-sampling time, a built in sampling sequencers can be used. The sequencer generates the 8-bit-timings based on a 1  $\mu$ s clock which can be pre-scaled with seq\_div. The results of the analog to digital conversion are automatically stored in a pipeline buffer or in register adc\_data and the ADC FIFO.

The timings can be programmed with following registers (apply for man\_mode=0):

**Figure 34:**  
**Timing Registers**

| Register         | Description  |
|------------------|--|
| seq_div          | Divider of the 1 $\mu$ s input clock for all sequencer timings           |
| seq_count        | Number of measurements in one sequence                                   |
| seq_start        | Writing 1 starts the sequencer, 0 stops the sequencer                    |
| seq_period       | Time of one measurement cycle  |
| seq_led_start    | Start time of the LED drivers within one cycle                           |
| seq_led_stop     | Stop time of the LED drivers within one cycle                            |
| seq_secled_start | Start time of the secondary LED drivers within one cycle (used for SpO2) |
| seq_secled_stop  | Stop time of the secondary LED drivers within one cycle (used for SpO2)  |




| Register                    | Description  |
|-----------------------------|--|
| seq_itg_start               | Start time of the integrator   |
| seq_itg_stop                | Stop time of the integrator  |
| seq_sdp1_start              | Start time of the synchronous demodulator's 1 positive multiplication  |
| seq_sdp1_stop               | Stop time of the synchronous demodulator's 1 positive multiplication   |
| seq_sdm1_start              | Start time of the synchronous demodulator's 1 negative multiplication  |
| seq_sdm1_stop               | Stop time of the synchronous demodulator's 1 negative multiplication   |
| seq_sdp2_start              | Start time of the synchronous demodulator's 2 positive multiplication  |
| seq_sdp2_stop               | Stop time of the synchronous demodulator's 2 positive multiplication   |
| seq_sdm2_start              | Start time of the synchronous demodulator's 2 negative multiplication  |
| seq_sdm2_stop               | Stop time of the synchronous demodulator's 2 negative multiplication   |
| seq_adc                     | Sampling position of the ADC   |
| seq_adc2tia,<br>seq_adc3tia | If the TIA channel is selected allow a second (and third) conversion within this cycle.  |
| sd_subs,<br>sd_subs_always  | Synchronous demodulator subsampling ratio between sequencer frequency and ADC sampling frequency.  |
| ulp                         | Ultra low power bit for the sequencer. If this bit is set and sd_subs>0, it disables the LED pulses and powers off the TIA in all sequences but the one where the TIA is sampled. This bit can be used to optimize the power consumption of the LEDs and the AS7026GG (This bit is located in ADC_CFGB Register bit 1) |
| irq_adc_timing_error        | The sequencer setup caused a timing error on ADC conversion.   |

Applies only If man\_mode=1

- The lowest data value of all registers except seq\_count and seq\_div is 1.

Figure 35:  
Block Diagram of Sequencer

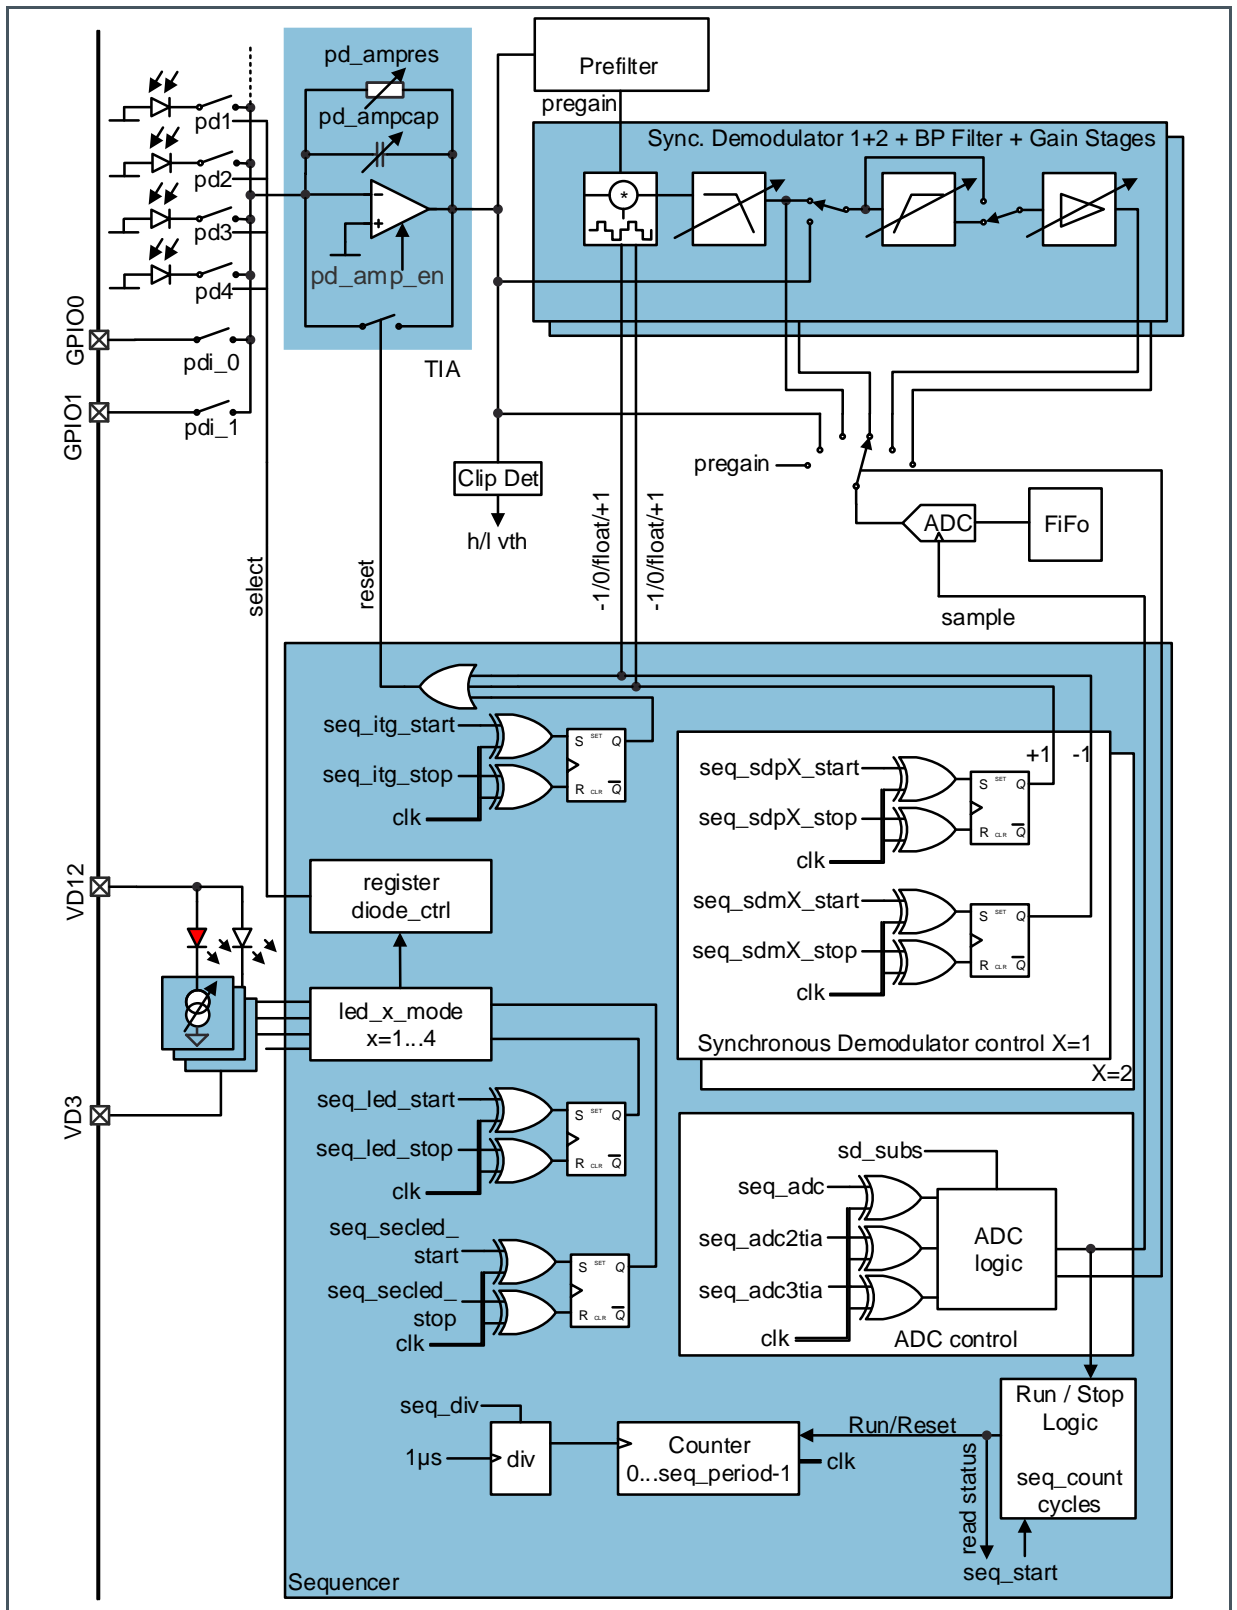

### 7.1.9 Sequencer Registers

#### SEQ\_CNT Register (Address 0x30)

Figure 36:  
SEQ\_CNT Register

| Addr: 0x30 |           | SEQ_CNT |        |  |
|------------|-----------|---------|--------|--|
| Bit        | Bit Name  | Default | Access | Bit Description  |
| 7:0        | seq_count | 0       | RW     | Number of measurements in one sequence. If seq_count = 0x0 the sequencer is running continuously if started by seq_start=1 or seq_start_sync=1. This register is reset by disabling/enabling of seq_start=0 (but not by osc_off=1) |

#### SEQ\_DIV Register (Address 0x31)

Figure 37:  
SEQ\_DIV Register

| Addr: 0x31 |          | SEQ_DIV |        |  |
|------------|----------|---------|--------|--|
| Bit        | Bit Name | Default | Access | Bit Description  |
| 7:0        | seq_div  | 0       | RW     | Divider value<br>Sequencer time increment $t_{clk} = (seq\_div + 1) * 1 \mu s$ |

The SEQ\_DIV register sets the input divider for the main clock.

#### SEQ\_START (Address 0x32)

Figure 38:  
SEQ\_START Register

| Addr: 0x32 |          | SEQ_START |        |                 |
|------------|----------|-----------|--------|-----------------|
| Bit        | Bit Name | Default   | Access | Bit Description |
| 7:2        | Not used | 0         | R_PUSH | Not used        |

| Addr: 0x32 |                | SEQ_START |        |   |
|------------|----------------|-----------|--------|---|
| Bit        | Bit Name       | Default   | Access | Bit Description   |
| 1          | seq_start_sync | 0         | R_PUSH | Similar to seq_start, but the sequencer will wait for overflow of the frequency divider that feeds all the switched-cap filters. This means 1) That it could take anything between 0 and 8 ms before the sequencer actually starts. 2) That the generated frequencies are in phase with the sequencer. For this to have any effect, the sequencer period should be selected with the selected frequencies (sd_bw, hp_freq) in mind. |
| 0          | seq_start      | 0         | R_PUSH | Writing 1 starts the sequencer(s) in the according to the configuration and upon rising edge of seq_start ADC selects first channel. Writing 0 stops the sequencer(s).<br>In manual mode, writing 1 starts one ADC conversion but does not initialize the ADC channel selection. Reading returns 1 if the sequencer is running (sequencer mode), respectively if the ADC is converting (manual mode)                                |

With the SEQ\_START register sets the configured sequencer can be started

### SEQ\_PER (Address 0x33)

Figure 39:  
SEQ\_PER Register

| Addr: 0x33 |            | SEQ_PER |        |   |
|------------|------------|---------|--------|---|
| Bit        | Bit Name   | Default | Access | Bit Description   |
| 7:0        | seq_period | 0       | RW     | t_period<br>Sequencer period $T = t\_period * (seq\_div+1) * 1 \mu s$ |

The SEQ\_PER register sets one measurement cycle of the sequencer.

**SEQ\_LED\_STA (Address 0x34)**

Figure 40:  
SEQ\_LED\_STA Register

| Addr: 0x34 |               | SEQ_LED_STA |        |                 |
|------------|---------------|-------------|--------|-----------------|
| Bit        | Bit Name      | Default     | Access | Bit Description |
| 7:0        | seq_led_start | 0           | RW     | LED start time  |

The SEQ\_LED register sets the LED drive timing. Data is stored as 16-bit value.

**SEQ\_LED\_STO (Address 0x35)**

Figure 41:  
SEQ\_LED\_STO Register

| Addr: 0x35 |              | SEQ_LED_STO |        |                 |
|------------|--------------|-------------|--------|-----------------|
| Bit        | Bit Name     | Default     | Access | Bit Description |
| 7:0        | seq_led_stop | 0           | RW     | LED stop time   |

The SEQ\_LED register sets the LED drive timing. Data is stored as 16-bit value.

**SEQ\_SECLED\_STA (Address 0x36)**

Figure 42:  
SEQ\_SECLED\_STA Register

| Addr: 0x36 |                  | SEQ_SECLED_STA |        |                          |
|------------|------------------|----------------|--------|--------------------------|
| Bit        | Bit Name         | Default        | Access | Bit Description          |
| 7:0        | seq_secled_start | 0              | RW     | Secondary LED start time |

The SEQ\_LED register sets the secondary LED drive timing which is used in ledX\_mode 6 only. Data is stored as 16-bit value.

**SEQ\_SECLEL\_STO (Address 0x37)**

Figure 43:  
SEQ\_SECLEL\_STO Register

| Addr: 0x37 |                 | SEQ_SECLEL_STO |        |                         |
|------------|-----------------|----------------|--------|-------------------------|
| Bit        | Bit Name        | Default        | Access | Bit Description         |
| 7:0        | seq_secled_stop | 0              | RW     | Secondary LED stop time |

**SEQ\_ITG\_STA (Address 0x38)**

Figure 44:  
SEQ\_ITG\_STA Register

| Addr: 0x38 |               | SEQ_ITG_STA |        |   |
|------------|---------------|-------------|--------|---|
| Bit        | Bit Name      | Default     | Access | Bit Description   |
| 7:0        | seq_itg_start | 0           | RW     | Integrator start time (start time=1 and stop time=0 means that it's - by default - always ON) Turning OFF the integrator actually means discharge the capacitor. This is only useful in capacitive integration mode, without the synchronous demodulator. |

The SEQ\_ITG register sets the photoamplifier integration time. Data is stored as 16-bit value.

**SEQ\_ITG\_STO (Address 0x39)**

Figure 45:  
SEQ\_ITG\_STO Register

| Addr: 0x39 |              | SEQ_ITG_STO |        |                      |
|------------|--------------|-------------|--------|----------------------|
| Bit        | Bit Name     | Default     | Access | Bit Description      |
| 7:0        | seq_itg_stop | 0           | RW     | Integrator stop time |

**SEQ\_SDP1\_STA (Address 0x3a)**

Figure 46:  
SEQ\_SDP1\_STA Register

| Addr: 0x3a |                | SEQ_SDP1_STA |        |                                      |
|------------|----------------|--------------|--------|--------------------------------------|
| Bit        | Bit Name       | Default      | Access | Bit Description                      |
| 7:0        | seq_sdp1_start | 0            | RW     | Positive multiplication start time 1 |

The SEQ\_SDP register sets the synchronous demodulator positive multiplication time. Data is stored as 16-bit value.

**SEQ\_SDP1\_STO (Address 0x3b)**

Figure 47:  
SEQ\_SDP1\_STO Register

| Addr: 0x3b |               | SEQ_SDP1_STO |        |                                     |
|------------|---------------|--------------|--------|-------------------------------------|
| Bit        | Bit Name      | Default      | Access | Bit Description                     |
| 7:0        | seq_sdp1_stop | 0            | RW     | Positive multiplication stop time 1 |

**SEQ\_SDP2\_STA (Address 0x3c)**

Figure 48:  
SEQ\_SDP2\_STA Register

| Addr: 0x3c |                | SEQ_SDP2_STA |        |                                      |
|------------|----------------|--------------|--------|--------------------------------------|
| Bit        | Bit Name       | Default      | Access | Bit Description                      |
| 7:0        | seq_sdp2_start | 0            | RW     | Positive multiplication start time 2 |

The SEQ\_SDP register sets the synchronous demodulator positive multiplication time. Data is stored as 16-bit value.

**SEQ\_SDP2\_STO (Address 0x3d)**

Figure 49:  
SEQ\_SDP2\_STO Register

| Addr: 0x3d |               | SEQ_SDP2_STO |        |                                     |
|------------|---------------|--------------|--------|-------------------------------------|
| Bit        | Bit Name      | Default      | Access | Bit Description                     |
| 7:0        | seq_sdp2_stop | 0            | RW     | Positive multiplication stop time 2 |

**SEQ\_SDM1\_STA (Address 0x3e)**

Figure 50:  
SEQ\_SDM1\_STA Register

| Addr: 0x3e |                | SEQ_SDM1_STA |        |                                      |
|------------|----------------|--------------|--------|--------------------------------------|
| Bit        | Bit Name       | Default      | Access | Bit Description                      |
| 7:0        | seq_sdm1_start | 0            | RW     | Negative multiplication start time 1 |

The SEQ\_SDM1 register sets the synchronous demodulator negative multiplication time 1. Data is stored as 16-bit value

**SEQ\_SDM1\_STO (Address 0x3f)**

Figure 51:  
SEQ\_SDM1\_STO Register

| Addr: 0x3f |               | SEQ_SDM1_STO |        |                                     |
|------------|---------------|--------------|--------|-------------------------------------|
| Bit        | Bit Name      | Default      | Access | Bit Description                     |
| 7:0        | seq_sdm1_stop | 0            | RW     | Negative multiplication stop time 1 |



**SEQ\_SDM2\_STA (Address 0x40)**

Figure 52:  
SEQ\_SDM2\_STA Register

| Addr: 0x40 |                | SEQ_SDM2_STA |        |                                      |
|------------|----------------|--------------|--------|--------------------------------------|
| Bit        | Bit Name       | Default      | Access | Bit Description                      |
| 7:0        | seq_sdm2_start | 0            | RW     | Negative multiplication start time 2 |

The SEQ\_SDM2 register sets the synchronous demodulator negative multiplication time 2. Data is stored as 16-bit value

**SEQ\_SDM2\_STO (Address 0x41)**

Figure 53:  
SEQ\_SDM2\_STO Register

| Addr: 0x41 |               | SEQ_SDM2_STA |        |                                     |
|------------|---------------|--------------|--------|-------------------------------------|
| Bit        | Bit Name      | Default      | Access | Bit Description                     |
| 7:0        | seq_sdm2_stop | 0            | RW     | Negative multiplication stop time 2 |

**SEQ\_ADC (Address 0x42)**

Figure 54:  
SEQ\_ADC Register

| Addr: 0x42 |          | SEQ_ADC |        |  |
|------------|----------|---------|--------|--|
| Bit        | Bit Name | Default | Access | Bit Description  |
| 7:0        | seq_adc  | 0       | RW     | ADC sampling time<br>The ADC conversion needs to be finished before the sequencer period ends otherwise ADC samples can be lost. |

The SEQ\_ADC register defines the time when the ADC starts sampling during each measurement cycle.

**SEQ\_ADC2TIA (Address 0x43)**

Figure 55:  
SEQ\_ADC2TIA Register

| Addr: 0x43 |             | SEQ_ADC2TIA |        |   |
|------------|-------------|-------------|--------|---|
| Bit        | Bit Name    | Default     | Access | Bit Description   |
| 7:0        | seq_adc2tia | 0           | RW     | <p>ADC second sampling time for TIA: If this time is non-zero, an ADC conversion is started at the given cycle, but only if adc_sel is currently selecting TIA. For all other channels, there is only a single ADC conversion executed in the sequencer period.</p> <p><b>Warning:</b> If non-zero, seq_adc must be non-zero as well, and seq_adc2tia bigger than seq_adc. The difference must be high enough so that the second ADC conversion is started after the first ADC conversion has finished.</p> <p>Also, if the seq_adc2tia features is used, there is the additional restriction that the second ADC conversion has to be finished before the end of the sequencer period.</p> |

**SEQ\_ADC3TIA (Address 0x44)**

Figure 56:  
SEQ\_ADC3TIA Register

| Addr: 0x44 |             | SEQ_ADC3TIA |        |  |
|------------|-------------|-------------|--------|--|
| Bit        | Bit Name    | Default     | Access | Bit Description  |
| 7:0        | seq_adc3tia | 0           | RW     | <p>ADC third sampling time for TIA: same as seq_adc2tia. Also must make sure to not overlap ADC conversions! Also, adc3tia must be after adc2tia</p> |

**SEQ\_ADC3TIA (Address 0x45)**

**Figure 57:**  
**SD\_SUBS Register**

| Addr: 0x45 |          | SD_SUBS |        |   |
|------------|----------|---------|--------|---|
| Bit        | Bit Name | Default | Access | Bit Description   |
| 7:0        | sd_subs  | 0       | RW     | <p>Synchronous demodulator subsampling ratio between sequencer frequency and ADC sampling frequency.<br/> <math>ADC-F_{sample} = \text{Sequencer\_Frequency} / (\text{sd\_subs} + 1)</math><br/>                     When setting to 0, then in every sequencer iteration the ADC will run.<br/>                     When setting to 1, then the first sequencer iteration will not trigger the ADC, but the second one will.<br/>                     Setting to N will make N iterations without ADC, followed by one iteration with the ADC measurement executed.<br/>                     It is recommended to use the ADC interrupt in this case and not the sequencer interrupt.<br/>                     Also see sd_subs_always which significantly affects this mechanism.</p> |

**SEQ\_CFG (Address 0x46)**

**Figure 58:**  
**SEQ\_CFG Register**

| Addr: 0x46 |                | SEQ_CFG |        |  |
|------------|----------------|---------|--------|--|
| Bit        | Bit Name       | Default | Access | Bit Description  |
| 7:1        | Not Used       | 0       | RW     | Not Used   |
| 0          | sd_subs_always | 0       | RW     | <p>If this bit is asserted, all sequencer periods are subject to subsampling as defined in SD_SUBS.<br/>                     If this bit is zero, then only the first period of an "ADC cycle" is duplicated sd_subs times, all other periods are regular.<br/>                     One "ADC cycle" is the time from the sequence in which adc_sel is pointing to the "smallest" adc channel up and including the sequence of the "largest" adc channel.</p> |

**SEQ\_CFG (Address 0x47)**

Figure 59:  
SEQ\_ERR Register

| Addr: 0x47 |                      | SEQ_ERR |        |   |
|------------|----------------------|---------|--------|---|
| Bit        | Bit Name             | Default | Access | Bit Description   |
| 7          | irq_adc_timing_error | 0       | SS_WC  | The ADC was started by the sequencer (or manually) while it was still converting. This does not flag an interrupt but when playing with the sequencer settings we suggest to check this flag to make sure that there is no problem with the sequencer programming |
| 6:0        | Not Used             | 0       | RW     | Not Used  |

**CYC\_COUNTER (Address 0x60)**

Figure 60:  
CYC\_COUNTER Register

| Addr: 0x60 |               | CYC_COUNTER |        |                             |
|------------|---------------|-------------|--------|-----------------------------|
| Bit        | Bit Name      | Default     | Access | Bit Description             |
| 7:0        | cycle_counter | 0           | RO     | Current cycle counter value |

The SEQ\_COUNTER register shows the current value of the sequence counter and period counter

**SEQ\_COUNTER (Address 0x61)**

Figure 61:  
SEQ\_COUNTER Register

| Addr: 0x61 |                  | SEQ_COUNTER |        |                                |
|------------|------------------|-------------|--------|--------------------------------|
| Bit        | Bit Name         | Default     | Access | Bit Description                |
| 7:0        | sequence_counter | 0           | RO     | Current sequence counter value |


**SUBS\_COUNTER (Address 0x62)**

Figure 62:  
SUBS\_COUNTER Register

| Addr: 0x62 |              | SUBS_COUNTER |        |                                   |  |
|------------|--------------|--------------|--------|-----------------------------------|--|
| Bit        | Bit Name     | Default      | Access | Bit Description                   |  |
| 7:0        | subs_counter | 0            | RO     | Current subsampling counter value |  |

**7.1.10 Optical Signal Conditioning**

Figure 63:  
Optical Signal Conditioning

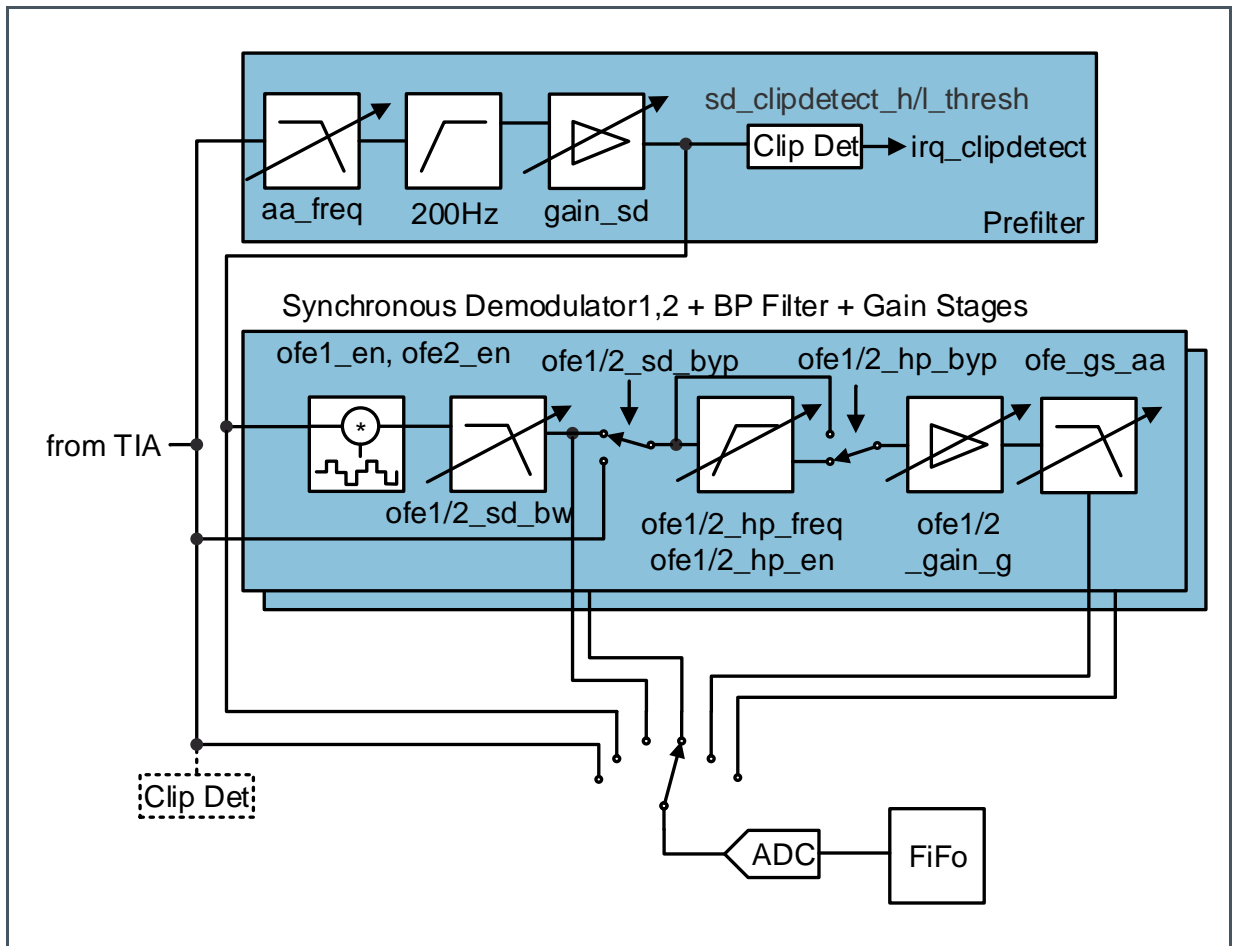

### Synchronous Demodulator

Two optional synchronous demodulators can be used to detect small optical signals in the presence of large unwanted noise (ambient light). Since the detector synchronizes to the LED frequency, the demodulator can only be used if the measurement sequencer is running.

It includes input filter (high pass at 200 Hz, adjustable low pass) and an 2nd order adjustable output low pass. The demodulator itself multiplies the signal by +1 / 0 / -1 with a timing which is controlled by the sequencer.



#### Information

The optical signal conditioning stage needs sigref\_en=1 for operation.

---

### High Pass Filter

Two optional high pass filters can be used to remove unwanted DC-components from the signal and allow further amplification. In order to guarantee fast settling times of the filter, four cutoff frequencies can be chosen.

### Gain Stage

Two optional gain stages can be used to amplify the signal after the DC-component has been removed.

### 7.1.11 Optical Signal Conditioning Registers

#### OFE\_CFGA (Address 0x50)

Figure 64:  
OFE\_CFGA Register

| Addr: 0x50                             |             | OFE_CFGA |        |                             |          |
|--|-------------|----------|--------|-----------------------------|----------|
| Bit                                    | Bit Name    | Default  | Access | Bit Description             |          |
| 7                                      | ofe2_en     | 0        | RW     | Enable OFE2                 |          |
| 6                                      | ofe1_en     | 0        | RW     | Enable OFE1                 |          |
| 5                                      | en_bias_ofe | 0        | RW     | Enable bias for OFE and TIA |          |
| Anti-aliasing filter cut-OFF frequency |             |          |        |                             |          |
|  |             |          |        | <b>Settings</b>             |          |
|  |             |          |        | <b>Signal</b>               |          |
| 4:3                                    | aa_freq     | 0        | RW     | 0                           | 10kHz    |
|  |             |          |        | 1                           | 20kHz    |
|  |             |          |        | 2                           | 40kHz    |
|  |             |          |        | 3                           | 60kHz    |
| SD gain                                |             |          |        |                             |          |
|  |             |          |        | <b>Settings</b>             |          |
|  |             |          |        | <b>Normal Gain</b>          |          |
| 2:0                                    | gain_sd     | 0        | RW     | 0                           | 1        |
|  |             |          |        | 1                           | 2        |
|  |             |          |        | 2                           | 4        |
|  |             |          |        | 3                           | 8        |
|  |             |          |        | 4                           | 16       |
|  |             |          |        | 5                           | 32       |
|  |             |          |        | 6                           | 64       |
|  |             |          |        | 7                           | Reserved |

**OFE\_CFGB (Address 0x50)**

**Figure 65:**  
**OFE\_CFGB Register**

| Addr: 0x51 |                        | OFE_CFGB |        |   |
|------------|------------------------|----------|--------|---|
| Bit        | Bit Name               | Default  | Access | Bit Description   |
| 7:4        | sd_clipdetect_h_thresh | 0        | RW     | <p>If the voltage on the output of the gain_sd stage (input of synchronous demodulator) exceed this threshold the irq_clipdetect interrupt is asserted. The threshold is defined as:</p> <p>0 ... 1824 mV<br/>           1 ... 1748 mV<br/>           2 ... 1672 mV<br/>           3 ... 1596 mV<br/>           4 ... 1520 mV<br/>           5 ... 1444 mV<br/>           6 ... 1368 mV<br/>           7 ... 1292 mV<br/>           8 ... 1216 mV<br/>           9 ... 1140 mV<br/>           10 ... 1064 mV<br/>           11 ... 988 mV<br/>           12 ... 912 mV<br/>           13 ... 836 mV<br/>           14 ... 760 mV<br/>           15 ... 684 mV</p> |
| 3:0        | sd_clipdetect_l_thresh | 0        | RW     | <p>If the voltage on the output of the gain_sd stage (input of synchronous demodulator) falls below this threshold the irq_clipdetect interrupt is asserted. The threshold is defined as:</p> <p>0 ... 67 mV<br/>           1 ... 143 mV<br/>           2 ... 219 mV<br/>           3 ... 295 mV<br/>           4 ... 371 mV<br/>           5 ... 447 mV<br/>           6 ... 523 mV<br/>           7 ... 599 mV<br/>           8 ... 675 mV<br/>           9 ... 751 mV<br/>           10 ... 827 mV<br/>           11 ... 903 mV</p>  |



| Addr: 0x51 |          | OFE_CFGB |        |                 |
|------------|----------|----------|--------|-----------------|
| Bit        | Bit Name | Default  | Access | Bit Description |
|            |          |          |        | 12 ... 979 mV   |
|            |          |          |        | 13 ... 1055 mV  |
|            |          |          |        | 14 ... 1131 mV  |
|            |          |          |        | 15 ... 1207 mV  |

**OFE\_CFGC (Address 0x52)**

Figure 66:  
OFE\_CFGC Register

| Addr: 0x52 |                     | OFE_CFGC |        |  |
|------------|---------------------|----------|--------|--|
| Bit        | Bit Name            | Default  | Access | Bit Description  |
| 7          | Not used            | 0        | RW     | Not used   |
| 6          | prefilter_aa_byp    | 0        | RW     | 0 ... Anti aliasing filter (aa_filter) is used<br>1 ... Bypass anti aliasing filter            |
| 5          | prefilter_hp_byp    | 0        | RW     | 0 ... Use 200 Hz high pass filter<br>1 ... Bypass 200 Hz high pass filter                      |
| 4          | prefilter_gain_byp  | 0        | RW     | 0 ... Use gain_sd stage<br>1 ... Bypass gain_sd stage  |
| 3          | prefilter_bypass_en | 0        | RW     | 0 ... Use prefilter unless any of the above register is set<br>1 ... Bypass complete prefilter |
| 2          | prefilter_aa_en     | 0        | RW     | 0 ... Anti aliasing filter (aa_filter) is OFF<br>1 ... Anti aliasing filter is ON              |
| 1          | prefilter_hp_en     | 0        | RW     | 0 ... 200 Hz high pass filter is OFF<br>1 ... 200 Hz high pass filter is ON                    |
| 0          | prefilter_gain_en   | 0        | RW     | 0 ... gain_sd stage is OFF<br>1 ... gain_sd stage is ON  |

**OFE\_CFGD (Address 0x53)**

Figure 67:  
OFE\_CFGD Register

| Addr: 0x53 |              | OFE_CFGD |        |   |         |              |   |        |   |            |   |           |   |           |
|------------|--------------|----------|--------|---|---------|--------------|---|--------|---|------------|---|-----------|---|-----------|
| Bit        | Bit Name     | Default  | Access | Bit Description   |         |              |   |        |   |            |   |           |   |           |
| 7:2        | Not used     | 0        | RW     | Not used  |         |              |   |        |   |            |   |           |   |           |
|            |              |          |        | OFE anti aliasing   |         |              |   |        |   |            |   |           |   |           |
|            |              |          |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Nominal Gain</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Bypass</td> </tr> <tr> <td>1</td> <td>fc=100 kHz</td> </tr> <tr> <td>2</td> <td>fc=10 kHz</td> </tr> <tr> <td>3</td> <td>fc=826 Hz</td> </tr> </tbody> </table> | Setting | Nominal Gain | 0 | Bypass | 1 | fc=100 kHz | 2 | fc=10 kHz | 3 | fc=826 Hz |
| Setting    | Nominal Gain |          |        |   |         |              |   |        |   |            |   |           |   |           |
| 0          | Bypass       |          |        |   |         |              |   |        |   |            |   |           |   |           |
| 1          | fc=100 kHz   |          |        |   |         |              |   |        |   |            |   |           |   |           |
| 2          | fc=10 kHz    |          |        |   |         |              |   |        |   |            |   |           |   |           |
| 3          | fc=826 Hz    |          |        |   |         |              |   |        |   |            |   |           |   |           |
| 1:0        | ofe_gs_aa    | 0        | RW     |   |         |              |   |        |   |            |   |           |   |           |

**OFE1\_CFGA (Address 0x54)**

Figure 68:  
OFE1\_CFGA Register

| Addr: 0x54 |                  | OFE1_CFGA |        |  |
|------------|------------------|-----------|--------|--|
| Bit        | Bit Name         | Default   | Access | Bit Description  |
| 7          | ofe1_sd_pol_init | 0         | RW     | The low level driver shall ensure that this register is 0 if one of the seq_sdm pulses is first, and is 1 if the seq_sdp is first within a sequence. |
| 6          | ofe1_sd_en       | 0         | RW     | 0 ... Power down of the Synchronous demodulator<br>1 ... Enable Synchronous demodulator  |
| 5          | ofe1_hp_en       | 0         | RW     | 0 ... Power down of the high pass filter<br>1 ... Enable high pass filter  |
| 4          | ofe1_gain_en     | 0         | RW     | 0 ... Power down of the Gain stage<br>1 ... Enable Gain stage  |
| 3          | ofe1_sd_byp      | 0         | RW     | 0 ... Synchronous demodulator is used<br>1 ... Synchronous demodulator is bypassed   |
| 2          | ofe1_hp_byp      | 0         | RW     | 0 ... HP filter is used<br>1 ... HP filter is bypassed   |
| 1          | ofe1_gain_byp    | 0         | RW     | 0 ... Gain stage is used<br>1 ... Gain stage is bypassed   |

| Addr: 0x54 |             | OFE1_CFGA |        |   |
|------------|-------------|-----------|--------|---|
| Bit        | Bit Name    | Default   | Access | Bit Description   |
| 0          | ofe1_sd_hld | 0         | RW     | SD hold<br>0 ... Output of synchronous demodulator is forced to SIGREF if not set to +1 or -1<br>1... Output of synchronous demodulator is tristated if not set to +1 or -1 |

**OFE1\_CFGB (Address 0x55)**

Figure 69:  
OFE1\_CFGB Register

| Addr: 0x55                              |             | OFE1_CFGB |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
|---|-------------|-----------|--------|---|---------|-----------|---|-------|---|-------|---|-------|---|-------|---|----|---|----|---|----|---|------------|
| Bit                                     | Bit Name    | Default   | Access | Bit Description   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 7                                       | Not used    | 0         | RW     | Not used  |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| Gain                                    |             |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
|   |             |           |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Gain</th> </tr> </thead> <tbody> <tr><td>0</td><td>1</td></tr> <tr><td>1</td><td>2</td></tr> <tr><td>2</td><td>4</td></tr> <tr><td>3</td><td>8</td></tr> <tr><td>4</td><td>16</td></tr> <tr><td>5</td><td>32</td></tr> <tr><td>6</td><td>64</td></tr> <tr><td>7</td><td>Do not use</td></tr> </tbody> </table> | Setting | Gain      | 0 | 1     | 1 | 2     | 2 | 4     | 3 | 8     | 4 | 16 | 5 | 32 | 6 | 64 | 7 | Do not use |
| Setting                                 | Gain        |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 0                                       | 1           |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 1                                       | 2           |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 2                                       | 4           |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 3                                       | 8           |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 4                                       | 16          |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 5                                       | 32          |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 6                                       | 64          |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 7                                       | Do not use  |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 6:4                                     | ofe1_gain_g | 0         | RW     |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| Synchronous demodulator low pass filter |             |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
|   |             |           |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Frequency</th> </tr> </thead> <tbody> <tr><td>0</td><td>10 Hz</td></tr> <tr><td>1</td><td>20 Hz</td></tr> <tr><td>2</td><td>40 Hz</td></tr> <tr><td>3</td><td>80 Hz</td></tr> </tbody> </table>  | Setting | Frequency | 0 | 10 Hz | 1 | 20 Hz | 2 | 40 Hz | 3 | 80 Hz |   |    |   |    |   |    |   |            |
| Setting                                 | Frequency   |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 0                                       | 10 Hz       |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 1                                       | 20 Hz       |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 2                                       | 40 Hz       |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 3                                       | 80 Hz       |           |        |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |
| 3:2                                     | ofe1_sd_bw  | 0         | RW     |   |         |           |   |       |   |       |   |       |   |       |   |    |   |    |   |    |   |            |

| Addr: 0x55                        |                  | OFE1_CFGB |        |  |         |                  |   |         |   |         |   |         |   |          |
|-----------------------------------|------------------|-----------|--------|--|---------|------------------|---|---------|---|---------|---|---------|---|----------|
| Bit                               | Bit Name         | Default   | Access | Bit Description  |         |                  |   |         |   |         |   |         |   |          |
| High pass filter cutoff frequency |                  |           |        |  |         |                  |   |         |   |         |   |         |   |          |
|                                   |                  |           |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Cutoff Frequency</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0.33 Hz</td> </tr> <tr> <td>1</td> <td>1.32 Hz</td> </tr> <tr> <td>2</td> <td>5.28 Hz</td> </tr> <tr> <td>3</td> <td>10.56 Hz</td> </tr> </tbody> </table> | Setting | Cutoff Frequency | 0 | 0.33 Hz | 1 | 1.32 Hz | 2 | 5.28 Hz | 3 | 10.56 Hz |
| Setting                           | Cutoff Frequency |           |        |  |         |                  |   |         |   |         |   |         |   |          |
| 0                                 | 0.33 Hz          |           |        |  |         |                  |   |         |   |         |   |         |   |          |
| 1                                 | 1.32 Hz          |           |        |  |         |                  |   |         |   |         |   |         |   |          |
| 2                                 | 5.28 Hz          |           |        |  |         |                  |   |         |   |         |   |         |   |          |
| 3                                 | 10.56 Hz         |           |        |  |         |                  |   |         |   |         |   |         |   |          |
| 1:0                               | ofe1_hp_freq     | 0         | RW     |  |         |                  |   |         |   |         |   |         |   |          |

**OFE2\_CFGA (Address 0x58)**

Figure 70:  
OFE2\_CFGA Register

| Addr: 0x58 |                  | OFE2_CFGA |        |   |
|------------|------------------|-----------|--------|---|
| Bit        | Bit Name         | Default   | Access | Bit Description   |
| 7          | ofe2_sd_pol_init | 0         | RW     | The low level driver shall ensure that this register is 0 if one of the seq_sdm pulses is first, and is 1 if the seq_sdp is first within a sequence.                        |
| 6          | ofe2_sd_en       | 0         | RW     | 0 ... Power down of the synchronous demodulator<br>1 ... Enable Synchronous demodulator   |
| 5          | ofe2_hp_en       | 0         | RW     | 0 ... Power down of the high pass filter<br>1 ... Enable high pass filter   |
| 4          | ofe2_gain_en     | 0         | RW     | 0 ... Power down of the Gain stage<br>1 ... Enable Gain stage   |
| 3          | ofe2_sd_byp      | 0         | RW     | 0 ... Synchronous demodulator is used<br>1 ... Synchronous demodulator is bypassed  |
| 2          | ofe2_hp_byp      | 0         | RW     | 0 ... HP filter is used<br>1 ... HP filter is bypassed  |
| 1          | ofe2_gain_byp    | 0         | RW     | 0 ... Gain stage is used<br>1 ... Gain stage is bypassed  |
| 0          | ofe2_sd_hld      | 0         | RW     | SD hold<br>0 ... Output of synchronous demodulator is forced to SIGREF if not set to +1 or -1<br>1... Output of synchronous demodulator is tristated if not set to +1 or -1 |

**OFE2\_CFGB (Address 0x59)**


Figure 71:  
OFE2\_CFGB Register

| Addr: 0x59                              |                  | OFE2_CFGB |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
|---|------------------|-----------|--------|---|---------|------------------|---|---------|---|---------|---|---------|---|----------|---|----|---|----|---|----|---|------------|
| Bit                                     | Bit Name         | Default   | Access | Bit Description   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 7                                       | Not used         | 0         | RW     | Not used  |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| Gain                                    |                  |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
|   |                  |           |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Gain</th> </tr> </thead> <tbody> <tr><td>0</td><td>1</td></tr> <tr><td>1</td><td>2</td></tr> <tr><td>2</td><td>4</td></tr> <tr><td>3</td><td>8</td></tr> <tr><td>4</td><td>16</td></tr> <tr><td>5</td><td>32</td></tr> <tr><td>6</td><td>64</td></tr> <tr><td>7</td><td>Do not use</td></tr> </tbody> </table> | Setting | Gain             | 0 | 1       | 1 | 2       | 2 | 4       | 3 | 8        | 4 | 16 | 5 | 32 | 6 | 64 | 7 | Do not use |
| Setting                                 | Gain             |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 0                                       | 1                |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 1                                       | 2                |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 2                                       | 4                |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 3                                       | 8                |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 4                                       | 16               |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 5                                       | 32               |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 6                                       | 64               |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 7                                       | Do not use       |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 6:4                                     | ofe2_gain_g      | 0         | RW     |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| Synchronous demodulator low pass filter |                  |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
|   |                  |           |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Frequency</th> </tr> </thead> <tbody> <tr><td>0</td><td>10 Hz</td></tr> <tr><td>1</td><td>20 Hz</td></tr> <tr><td>2</td><td>40 Hz</td></tr> <tr><td>3</td><td>80 Hz</td></tr> </tbody> </table>  | Setting | Frequency        | 0 | 10 Hz   | 1 | 20 Hz   | 2 | 40 Hz   | 3 | 80 Hz    |   |    |   |    |   |    |   |            |
| Setting                                 | Frequency        |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 0                                       | 10 Hz            |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 1                                       | 20 Hz            |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 2                                       | 40 Hz            |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 3                                       | 80 Hz            |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 3:2                                     | ofe2_sd_bw       | 0         | RW     |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| High pass filter cutoff frequency       |                  |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
|   |                  |           |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Cutoff Frequency</th> </tr> </thead> <tbody> <tr><td>0</td><td>0.33 Hz</td></tr> <tr><td>1</td><td>1.32 Hz</td></tr> <tr><td>2</td><td>5.28 Hz</td></tr> <tr><td>3</td><td>10.56 Hz</td></tr> </tbody> </table>  | Setting | Cutoff Frequency | 0 | 0.33 Hz | 1 | 1.32 Hz | 2 | 5.28 Hz | 3 | 10.56 Hz |   |    |   |    |   |    |   |            |
| Setting                                 | Cutoff Frequency |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 0                                       | 0.33 Hz          |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 1                                       | 1.32 Hz          |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 2                                       | 5.28 Hz          |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 3                                       | 10.56 Hz         |           |        |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |
| 1:0                                     | ofe2_hp_freq     | 0         | RW     |   |         |                  |   |         |   |         |   |         |   |          |   |    |   |    |   |    |   |            |

### 7.1.12 Light-to-Frequency Mode

The LTF (light-to-frequency, or FM, frequency mode) mode.

Figure 72:  
Light-to-Frequency Mode Internal Circuit

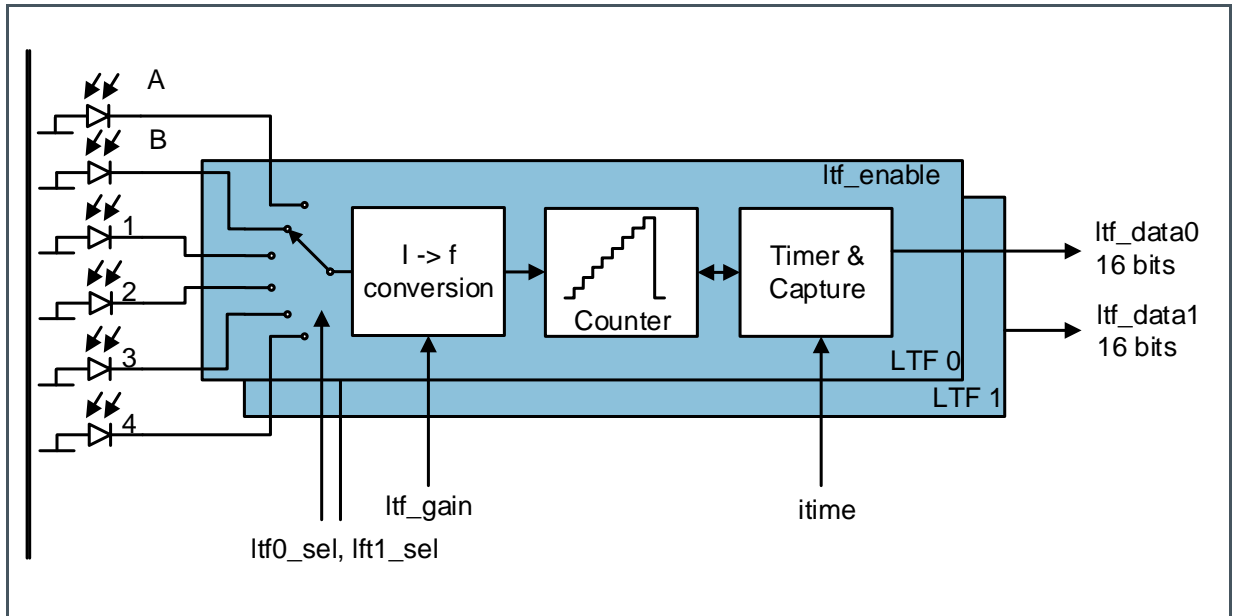

- (1) Do not use diodes which are connected to the TIA (register pd\_a, pd\_b, pd1...4) at the same time when lft\_en is enabled on the same diode.

#### LTFDATA0\_L (Address 0x20)

Figure 73:  
LTFDATA0\_L Register

| Addr: 0x20 |               | LTFDATA0_L |        |  |  |
|------------|---------------|------------|--------|--|--|
| Bit        | Bit Name      | Default    | Access | Bit Description  |  |
| 7:0        | lftdata0[7:0] | 0          | RO     | LTF result channel 0 low byte. Software must make sure that the LTF integration is not running when accessing the LTFDATA registers. These are the direct counter registers, they are not latched. If buffering is required, consider using FIFO mode. |  |

**LTFDATA0\_H (Address 0x21)**

**Figure 74:**  
LTFDATA0\_H Register

| Addr: 0x21 |                | LTFDATA0_H |        |                                |
|------------|----------------|------------|--------|--------------------------------|
| Bit        | Bit Name       | Default    | Access | Bit Description                |
| 7:0        | ltfdata0[15:8] | 0          | RO     | LTF result channel 0 high byte |

**LTFDATA1\_L (Address 0x22)**

**Figure 75:**  
LTFDATA1\_L Register

| Addr: 0x22 |               | LTFDATA1_L |        |  |
|------------|---------------|------------|--------|--|
| Bit        | Bit Name      | Default    | Access | Bit Description  |
| 7:0        | ltfdata0[7:0] | 0          | RO     | LTF result channel 1 low byte. Software must make sure that the LTF integration is not running when accessing the LTFDATA registers. If buffering is required, consider using FIFO mode. |

**LTFDATA1\_H (Address 0x23)**

**Figure 76:**  
LTFDATA1\_H Register

| Addr: 0x23 |                | LTFDATA1_H |        |                                |
|------------|----------------|------------|--------|--------------------------------|
| Bit        | Bit Name       | Default    | Access | Bit Description                |
| 7:0        | ltfdata1[15:8] | 0          | RO     | LTF result channel 1 high byte |

**ITIME (Address 0x24)**

**Figure 77:**  
**ITIME Register**

| Addr: 0x24 |          | ITIME   |        |  |
|------------|----------|---------|--------|--|
| Bit        | Bit Name | Default | Access | Bit Description  |
| 7:0        | itime    | 0       | RW     | <p>LTF integration time. MODCLK is 2/3MHz (666.67 kHz). One LSB of itime is 3.072 ms (2048 MODCLK cycles).<br/>0=3.072 ms<br/>...<br/>255=786.432 ms</p> <p>Using the itime_unit register (see below), the unit of itime can be reduced by 2, 4, or 8. This shorter integration times can be selected (required for flicker detection), but it can also be used to increase the resolution of itime. For example, if 50ms integration time are desired, the best value for regular itime would be 15 (=16 periods=49.152 ms). However, but setting itime_unit=2 (LSB=768 μs), one can select 64 (=65 periods=49.9 ms)</p> <p>Warning: selecting an integration time smaller than 3.072 ms will reduce the resolution of the conversion, as the maximum lfddata value is not 1024 (10 bits) anymore, but 512 (9 bits) in case of 1.536 ms integration time, 256 (8 bits) for 768 μs and 128 (7 bits) for 384 μs</p> |



**LTF\_CONFIG (Address 0x25)**

**Figure 78:**  
**LTF\_CONFIG Register**

| Addr: 0x25 |                 | LTF_CONFIG |        |   |
|------------|-----------------|------------|--------|---|
| Bit        | Bit Name        | Default    | Access | Bit Description   |
| 7          | infinite_itime  | 0          | RW     | If this is asserted, then integration does not stop. The ITIME setting is ignored. Use with watch the ltfdata counters. (Warning: must be filtered in software to prevent inconsistent upper/lower byte). It's implemented as a count disable on the integration counter, so when resetting bit to 0 again, the itime counter will continue and results can be read afterwards through the regular mechanisms (ltfdata or FIFO) This is intended for very long integration times - as the timing is controlled by software/I <sup>2</sup> C, accuracy fully depends on the system and I <sup>2</sup> C master.  |
| 6          | az_disable_auto | 0          | RW     | 0: Run autozero on both channels every time FM mode is activated for the first time after ENAB is being asserted.<br>1: Do not run autozero automatically. Autozero can only be activated manually (AZ_CONTROL)   |
| 5:4        | reserved        | 0          | RW     | Reserved – leave at 0   |
| 1          | ltf_fifo_mode   | 0          | RW     | Run LTF integrations back to back, the LTF modulator is running continuously (the modulators are not reset between integrations cycles).<br>After each integration, the result gets written to the FIFO. The FIFO is being filled automatically, FIFO threshold interrupt is flagged as configured.<br>The first item read from the FIFO is from channel 0, the next one from channel 1, etc.<br>Note that there is no ltf_done interrupt triggered after each integration. A FIFO threshold of 1 can be used to generate an interrupt for each result. irq_ltf_enab should be kept asserted to avoid missing an ltf_sat interrupt.<br>Do not enable ADC/sequencer FIFO mode and ltf_fifo_mode at the same time, corrupted data would be the result.<br>Make sure to empty the FIFO in time, if the FIFO is full, new data is not being stored in the FIFO. Source of data read from the FIFO after an overflow condition is undefined (can be from channel 0 or channel 1)<br>Stop the procedure by clearing this bit. |

| Addr: 0x25 |            | LTF_CONFIG |        |   |
|------------|------------|------------|--------|---|
| Bit        | Bit Name   | Default    | Access | Bit Description   |
| 0          | ltf_enable | 0          | RW     | This bit must be asserted for any LTF function (powers up the LTF clock tree) |

**LTF\_SEL (Address 0x26)**

Figure 79:  
LTF\_SEL Register

| Addr: 0x26                       |            | LTF_SEL |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
|----------------------------------|------------|---------|--------|---|---------|--------|---|---|---|------|---|---|---|------|---|-----|---|-----|---|-----|---|-----|
| Bit                              | Bit Name   | Default | Access | Bit Description   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 7                                | Do not use | 0       | RW     | Do not use  |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| Select the sensor diode for LTF1 |            |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
|                                  |            |         |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Source</th> </tr> </thead> <tbody> <tr><td>0</td><td>A</td></tr> <tr><td>1</td><td>A/16</td></tr> <tr><td>2</td><td>B</td></tr> <tr><td>3</td><td>B/16</td></tr> <tr><td>4</td><td>PD1</td></tr> <tr><td>5</td><td>PD2</td></tr> <tr><td>6</td><td>PD3</td></tr> <tr><td>7</td><td>PD4</td></tr> </tbody> </table> | Setting | Source | 0 | A | 1 | A/16 | 2 | B | 3 | B/16 | 4 | PD1 | 5 | PD2 | 6 | PD3 | 7 | PD4 |
| Setting                          | Source     |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 0                                | A          |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 1                                | A/16       |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 2                                | B          |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 3                                | B/16       |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 4                                | PD1        |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 5                                | PD2        |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 6                                | PD3        |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 7                                | PD4        |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 6:4                              | ltf1_sel   | 2       | RW     |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| Select the sensor diode for LTF0 |            |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
|                                  |            |         |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Source</th> </tr> </thead> <tbody> <tr><td>0</td><td>A</td></tr> <tr><td>1</td><td>A/16</td></tr> <tr><td>2</td><td>B</td></tr> <tr><td>3</td><td>B/16</td></tr> <tr><td>4</td><td>PD1</td></tr> <tr><td>5</td><td>PD2</td></tr> <tr><td>6</td><td>PD3</td></tr> <tr><td>7</td><td>PD4</td></tr> </tbody> </table> | Setting | Source | 0 | A | 1 | A/16 | 2 | B | 3 | B/16 | 4 | PD1 | 5 | PD2 | 6 | PD3 | 7 | PD4 |
| Setting                          | Source     |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 0                                | A          |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 1                                | A/16       |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 2                                | B          |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 3                                | B/16       |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 4                                | PD1        |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 5                                | PD2        |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 6                                | PD3        |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 7                                | PD4        |         |        |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |
| 2:0                              | ltf0_sel   | 0       | RW     |   |         |        |   |   |   |      |   |   |   |      |   |     |   |     |   |     |   |     |

**LTF\_GAIN (Address 0x27)**

**Figure 80:**  
LTF\_GAIN Register

| Addr: 0x27 |                           | LTF_GAIN |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
|------------|---------------------------|----------|--------|--|---------|----------|---|---------------------------|---|------------------|---|---------------------|---|---------------------|---|---|---|---|---|----|---|----|---|----|------|-----------------------|
| Bit        | Bit Name                  | Default  | Access | Bit Description  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 7:6        | Do not use                | 0        | RW     | Do not use   |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
|            |                           |          |        | Select the itime unit.<br>See ITIME register description (Figure 77).  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
|            |                           |          |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Behavior</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Normal, time LSB=3.072 ms</td> </tr> <tr> <td>1</td> <td>/2, LSB=1.536 ms</td> </tr> <tr> <td>2</td> <td>/4, time LSB=768 μs</td> </tr> <tr> <td>3</td> <td>/8, time LSB=384 μs</td> </tr> </tbody> </table>   | Setting | Behavior | 0 | Normal, time LSB=3.072 ms | 1 | /2, LSB=1.536 ms | 2 | /4, time LSB=768 μs | 3 | /8, time LSB=384 μs |   |   |   |   |   |    |   |    |   |    |      |                       |
| Setting    | Behavior                  |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 0          | Normal, time LSB=3.072 ms |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 1          | /2, LSB=1.536 ms          |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 2          | /4, time LSB=768 μs       |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 3          | /8, time LSB=384 μs       |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
|            |                           |          |        | Select the gain  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
|            |                           |          |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Gain</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0.25</td> </tr> <tr> <td>1</td> <td>0.5</td> </tr> <tr> <td>2</td> <td>1</td> </tr> <tr> <td>3</td> <td>2</td> </tr> <tr> <td>4</td> <td>4</td> </tr> <tr> <td>5</td> <td>8</td> </tr> <tr> <td>6</td> <td>16</td> </tr> <tr> <td>7</td> <td>24</td> </tr> <tr> <td>8</td> <td>64</td> </tr> <tr> <td>9-15</td> <td>Reserved – do not use</td> </tr> </tbody> </table> | Setting | Gain     | 0 | 0.25                      | 1 | 0.5              | 2 | 1                   | 3 | 2                   | 4 | 4 | 5 | 8 | 6 | 16 | 7 | 24 | 8 | 64 | 9-15 | Reserved – do not use |
| Setting    | Gain                      |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 0          | 0.25                      |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 1          | 0.5                       |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 2          | 1                         |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 3          | 2                         |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 4          | 4                         |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 5          | 8                         |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 6          | 16                        |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 7          | 24                        |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 8          | 64                        |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 9-15       | Reserved – do not use     |          |        |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 5:4        | itime_unit                | 0        | RW     |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |
| 3:0        | ltf_gain                  | 0        | RW     |  |         |          |   |                           |   |                  |   |                     |   |                     |   |   |   |   |   |    |   |    |   |    |      |                       |

**LTF\_CONTROL (Address 0x28)**

**Figure 81:**  
LTF\_CONTROL Register

| Addr: 0x28 |            | LTF_CONTROL |        |                 |
|------------|------------|-------------|--------|-----------------|
| Bit        | Bit Name   | Default     | Access | Bit Description |
| 7:1        | Do not use | 0           | R_PUSH | Do not use      |

| Addr: 0x28 |           | LTF_CONTROL |        |  |
|------------|-----------|-------------|--------|--|
| Bit        | Bit Name  | Default     | Access | Bit Description  |
| 0          | ltf_start | 0           | R_PUSH | <p>Writing 1 starts the counter, and it will run for the specified time (itime). Afterwards it stops automatically and interrupt is flagged. writing 0 to the counter stops it as well. reading the value returns whether the counter is running.</p> <p>If ltf_fifo_mode is non-zero, then FM conversions are done continuously until a 0 is written to this bit again.</p> |

### AZ\_CONTROL (Address 0x29)

Figure 82:  
AZ\_CONTROL Register

| Addr: 0x29 |             | AZ_CONTROL |        |  |
|------------|-------------|------------|--------|--|
| Bit        | Bit Name    | Default    | Access | Bit Description  |
| 7:2        | Do not use  | 0          | RW_SM  | Do not use   |
| 1          | az_enable_1 | 0          | RW_SM  | <p>Writing a '1' to this register starts the AZ engine for channel 1. This is usually not necessary, as AZ is executed automatically before the first LTF integration (unless az_disable_auto is set) The bit is cleared to '0' automatically when the AZ has finished. You cannot write a '0' to this register.</p> |
| 0          | az_enable_0 | 0          | RW_SM  | The same as az_enable_1, but for channel 0.  |

### OFFSET0 (Address 0x2a)

Figure 83:  
OFFSET0 Register

| Addr: 0x2a |              | OFFSET0 |        |  |
|------------|--------------|---------|--------|--|
| Bit        | Bit Name     | Default | Access | Bit Description  |
| 7:0        | offset0[7:0] | 0       | RW_SM  | <p>This register holds the value of the offset on the channel 0 OpAmp. It can be overwritten, and it gets overwritten by the auto-zero mechanism. The value is in sign/magnitude encoding. The value is <math>\pm 127</math>, sign/magnitude</p> |

**OFFSET1 (Address 0x2b)**


**Figure 84:**  
**OFFSET1 Register**

| Addr: 0x2b |              | OFFSET1 |        |   |
|------------|--------------|---------|--------|---|
| Bit        | Bit Name     | Default | Access | Bit Description   |
| 7:0        | offset0[7:0] | 0       | RW_SM  | This register holds the value of the offset on the channel 1 OpAmp. It can be overwritten, and it gets overwritten by the auto-zero mechanism. The value is in sign/magnitude encoding. The value is $\pm 127$ , sign/magnitude |

### 7.1.13 Electrical Analog Front End


The electrical analog front end consists of three identical signal paths with independent settings of bias condition, gain and offset.

**Figure 85:**  
Electrical Analog Front End Internal Circuit

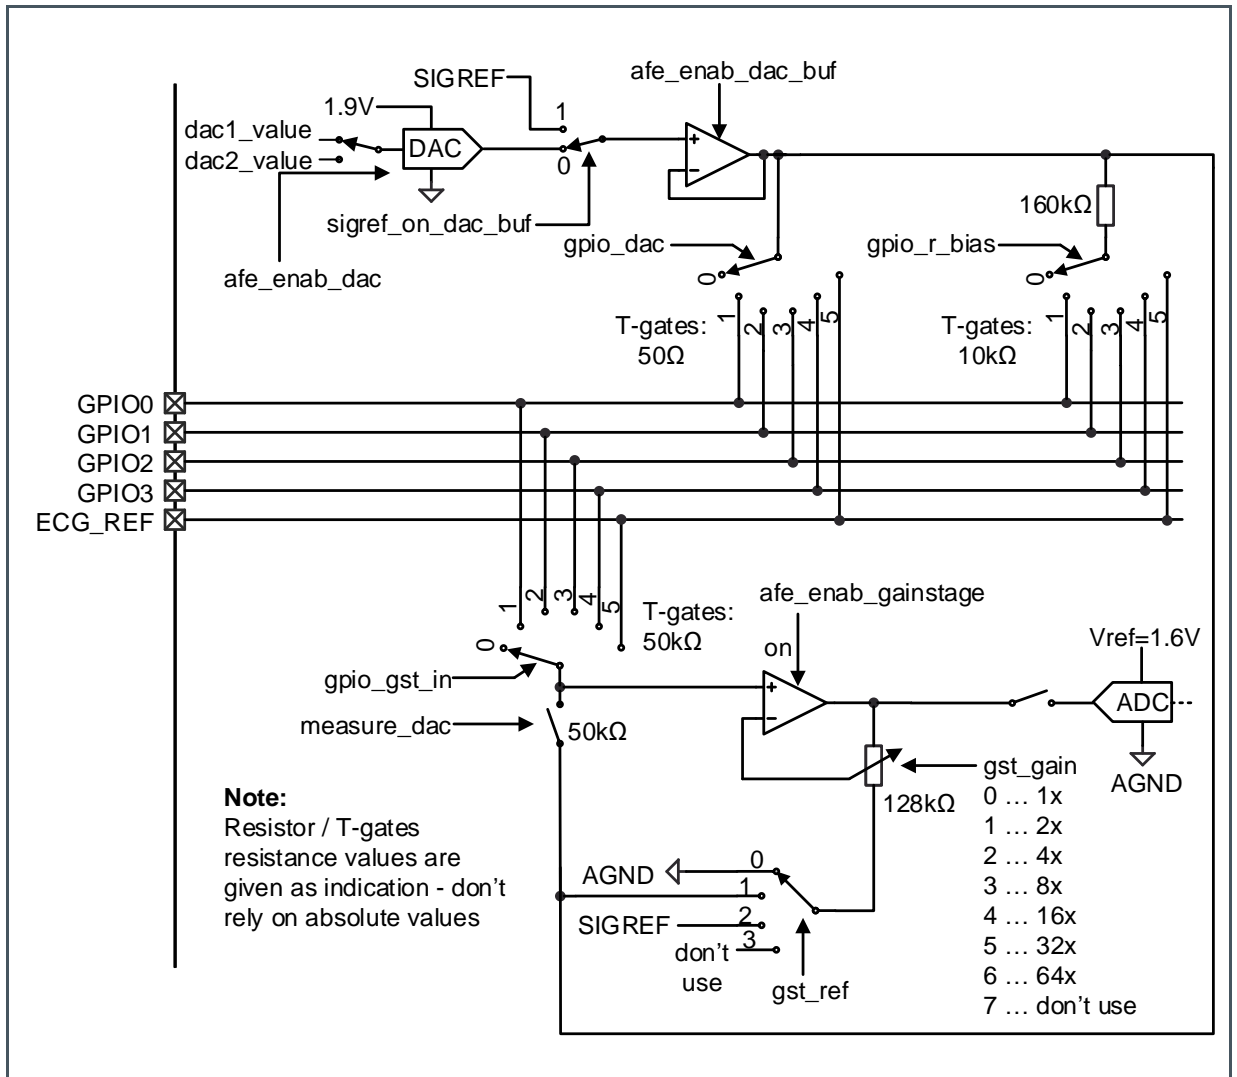

**DAC Switching**

**Figure 86:**  
Electrical Analog Front End DAC Level Switching

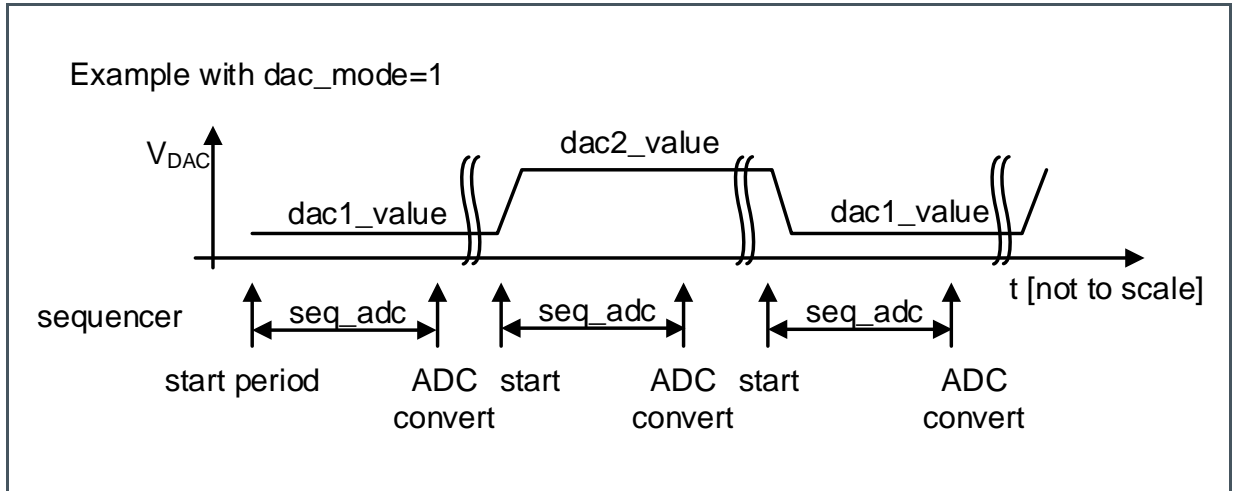

If bit `dac_mode` is not zero, the DAC switches its codes between `dac1_value` and `dac2_value` on the beginning of every/every 2<sup>nd</sup>/every 4<sup>th</sup> sequencer cycle where the ADC is converting the electrical frontend channel. ADC conversions of any other channel do not switch the DAC.

**Input Pins**

Four general purpose pins and `ECG_REF` can be used either as configurable GPIO pin or as analog input pins for the electrical analog front end. The analog inputs can be configured to setup different amplifier topologies.

### 7.1.14 EAF (Electrical Analog Frontend) Registers

#### AFE\_CFG (Address 0x70)

Figure 87:  
AFE\_CFG Register

| Addr: 0x70 |                    | AFE_CFG |        |  |
|------------|--------------------|---------|--------|--|
| Bit        | Bit Name           | Default | Access | Bit Description  |
| 7:4        | Do not use         | 0       | RW     | Do not use   |
| 3          | afe_enab           | 0       | RW     | 0 ... EAF bias deactivated<br>1 ... EAF bias activated (need to be set for any functions of the EAF are used). |
| 2          | afe_enab_dac       | 0       | RW     | 0 ... DAC inside the EAF OFF<br>1 ... DAC inside the EAF ON  |
| 1          | afe_enab_dac_buf   | 0       | RW     | 0 ... DAC buffer OFF<br>1 ... DAC buffer ON  |
| 0          | afe_enab_gainstage | 0       | RW     | 0 ... Gain stage in EAF OFF<br>1 ... Gain stage in EAF ON  |

The AFE\_CFG register is used to configure the analog frontend.

#### EAF\_GST (Address 0x80)

Figure 88:  
EAF\_GST Register

| Addr: 0x80 |               | EAF_GST |        |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
|------------|---------------|---------|--------|--|---------|---------|---|---------------|---|-------|---|-------|---|-------|---|-------|---|---------|
| Bit        | Bit Name      | Default | Access | Bit Description  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
|            |               |         |        | Gain stage input selection   |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
|            |               |         |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>Not connected</td> </tr> <tr> <td>1</td> <td>GPIO0</td> </tr> <tr> <td>2</td> <td>GPIO1</td> </tr> <tr> <td>3</td> <td>GPIO2</td> </tr> <tr> <td>4</td> <td>GPIO3</td> </tr> <tr> <td>5</td> <td>ECG_REF</td> </tr> </tbody> </table> | Setting | Meaning | 0 | Not connected | 1 | GPIO0 | 2 | GPIO1 | 3 | GPIO2 | 4 | GPIO3 | 5 | ECG_REF |
| Setting    | Meaning       |         |        |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
| 0          | Not connected |         |        |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
| 1          | GPIO0         |         |        |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
| 2          | GPIO1         |         |        |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
| 3          | GPIO2         |         |        |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
| 4          | GPIO3         |         |        |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
| 5          | ECG_REF       |         |        |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |
| 7:5        | gpio_gst_in   | 0       | RW     |  |         |         |   |               |   |       |   |       |   |       |   |       |   |         |



| Addr: 0x80                   |            | EAF_GST |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
|------------------------------|------------|---------|--------|--|---------|---------|---|------|---|------------|---|--------|---|----------|---|----|---|----|---|----|---|----------|
| Bit                          | Bit Name   | Default | Access | Bit Description  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| Gain stage reference voltage |            |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
|                              |            |         |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>AGND</td> </tr> <tr> <td>1</td> <td>DAC buffer</td> </tr> <tr> <td>2</td> <td>SIGREF</td> </tr> <tr> <td>3</td> <td>Reserved</td> </tr> </tbody> </table>   | Setting | Meaning | 0 | AGND | 1 | DAC buffer | 2 | SIGREF | 3 | Reserved |   |    |   |    |   |    |   |          |
| Setting                      | Meaning    |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 0                            | AGND       |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 1                            | DAC buffer |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 2                            | SIGREF     |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 3                            | Reserved   |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 4:3                          | gst_ref    | 0       | RW     |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| Gain stage gain              |            |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
|                              |            |         |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1</td> </tr> <tr> <td>1</td> <td>2</td> </tr> <tr> <td>2</td> <td>4</td> </tr> <tr> <td>3</td> <td>8</td> </tr> <tr> <td>4</td> <td>16</td> </tr> <tr> <td>5</td> <td>32</td> </tr> <tr> <td>6</td> <td>64</td> </tr> <tr> <td>7</td> <td>Reserved</td> </tr> </tbody> </table> | Setting | Meaning | 0 | 1    | 1 | 2          | 2 | 4      | 3 | 8        | 4 | 16 | 5 | 32 | 6 | 64 | 7 | Reserved |
| Setting                      | Meaning    |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 0                            | 1          |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 1                            | 2          |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 2                            | 4          |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 3                            | 8          |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 4                            | 16         |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 5                            | 32         |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 6                            | 64         |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 7                            | Reserved   |         |        |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |
| 2:0                          | gst_gain   | 0       | RW     |  |         |         |   |      |   |            |   |        |   |          |   |    |   |    |   |    |   |          |

The EAF register is used to configure the electrical frontend

### EAF\_BIAS (Address 0x81)

Figure 89:  
EAF\_BIAS Register

| Addr: 0x81        |                              | EAF_BIAS |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
|-------------------|------------------------------|----------|--------|--|---------|---------|---|----------------------|---|----------------------------|---|----------------------------|---|----------------------------|---|----------------------------|---|------------------------------|
| Bit               | Bit Name                     | Default  | Access | Bit Description  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
| Resistive biasing |                              |          |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
|                   |                              |          |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No resistive biasing</td> </tr> <tr> <td>1</td> <td>Resistive biasing on GPIO0</td> </tr> <tr> <td>2</td> <td>Resistive biasing on GPIO1</td> </tr> <tr> <td>3</td> <td>Resistive biasing on GPIO2</td> </tr> <tr> <td>4</td> <td>Resistive biasing on GPIO3</td> </tr> <tr> <td>5</td> <td>Resistive biasing on ECG_REF</td> </tr> </tbody> </table> | Setting | Meaning | 0 | No resistive biasing | 1 | Resistive biasing on GPIO0 | 2 | Resistive biasing on GPIO1 | 3 | Resistive biasing on GPIO2 | 4 | Resistive biasing on GPIO3 | 5 | Resistive biasing on ECG_REF |
| Setting           | Meaning                      |          |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
| 0                 | No resistive biasing         |          |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
| 1                 | Resistive biasing on GPIO0   |          |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
| 2                 | Resistive biasing on GPIO1   |          |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
| 3                 | Resistive biasing on GPIO2   |          |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
| 4                 | Resistive biasing on GPIO3   |          |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
| 5                 | Resistive biasing on ECG_REF |          |        |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |
| 7:5               | gpio_r_bias                  | 0        | RW     |  |         |         |   |                      |   |                            |   |                            |   |                            |   |                            |   |                              |

| Addr: 0x81 |          | EAF_BIAS |        |                 |
|------------|----------|----------|--------|-----------------|
| Bit        | Bit Name | Default  | Access | Bit Description |
| 4:0        | Not used | 0        | RW     | Do not use      |

### EAF\_DAC (Address 0x82)

Figure 90:  
EAF\_DAC Register

| Addr: 0x82  |                   | AFE_CFG |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
|-------------|-------------------|---------|--------|--|---------|---------|---|----------------|---|--------------|---|--------------|---|--------------|---|--------------|---|----------------|
| Bit         | Bit Name          | Default | Access | Bit Description  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 7:5         | Do not use        | 0       | RW     | Do not use   |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 4           | sigref_on_dac_buf | 0       | RW     | If asserted, connect SIGREF to DAC buffer.   |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 3           | measure_dac       | 0       | RW     | If this bit is asserted, the DAC output is connected to the gain stage input (independent of gpio_gst_in selection, therefore the DAC output is measurable on the GPIO pin)  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| DAC on GPIO |                   |         |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
|             |                   |         |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>No DAC biasing</td> </tr> <tr> <td>1</td> <td>DAC on GPIO0</td> </tr> <tr> <td>2</td> <td>DAC on GPIO1</td> </tr> <tr> <td>3</td> <td>DAC on GPIO2</td> </tr> <tr> <td>4</td> <td>DAC on GPIO3</td> </tr> <tr> <td>5</td> <td>DAC on ECG_REF</td> </tr> </tbody> </table> | Setting | Meaning | 0 | No DAC biasing | 1 | DAC on GPIO0 | 2 | DAC on GPIO1 | 3 | DAC on GPIO2 | 4 | DAC on GPIO3 | 5 | DAC on ECG_REF |
| Setting     | Meaning           |         |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 0           | No DAC biasing    |         |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 1           | DAC on GPIO0      |         |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 2           | DAC on GPIO1      |         |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 3           | DAC on GPIO2      |         |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 4           | DAC on GPIO3      |         |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 5           | DAC on ECG_REF    |         |        |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |
| 2:0         | gpio_dac          | 0       | RW     |  |         |         |   |                |   |              |   |              |   |              |   |              |   |                |

### EAF\_DAC1\_L (Address 0x83)

Figure 91:  
EAF\_DAC1\_L Register

| Addr: 0x83 |                 | EAF_DAC1_L |        |                    |
|------------|-----------------|------------|--------|--------------------|
| Bit        | Bit Name        | Default    | Access | Bit Description    |
| 7:6        | dac1_value[1:0] | 0          | RW     | DAC value 1 (2LSB) |
| 5:0        | Not used        | 0          | RW     | Not used           |

The EAF\_DAC1/2\_L/H registers is used to configure the dac value. See bit dac\_mode for selection of dac register 1 or 2

#### EAF\_DAC1\_H (Address 0x84)

Figure 92:  
EAF\_DAC1\_H Register

| Addr: 0x84 |                 | EAF_DAC1_H |        |   |
|------------|-----------------|------------|--------|---|
| Bit        | Bit Name        | Default    | Access | Bit Description   |
| 7:0        | dac1_value[9:2] | 0          | RW     | DAC value 1 (upper 8 bits)<br>10-bit value:<br>0x000 ... 0 V<br>0x3FF ... 1.9 V |

#### EAF\_DAC2\_L (Address 0x85)

Figure 93:  
EAF\_DAC2\_L Register

| Addr: 0x85 |                 | EAF_DAC2_L |        |                    |
|------------|-----------------|------------|--------|--------------------|
| Bit        | Bit Name        | Default    | Access | Bit Description    |
| 7:6        | dac2_value[1:0] | 0          | RW     | DAC value 2 (2LSB) |
| 5:0        | Not used        | 0          | RW     | Not used           |

#### EAF\_DAC2\_H (Address 0x86)

Figure 94:  
EAF\_DAC2\_H Register

| Addr: 0x86 |                 | EAF_DAC2_H |        |   |
|------------|-----------------|------------|--------|---|
| Bit        | Bit Name        | Default    | Access | Bit Description   |
| 7:0        | dac2_value[9:2] | 0          | RW     | DAC value 1 (upper 8 bits)<br>10-bit value:<br>0x000 ... 0 V<br>0x3FF ... 1.9 V |


**EAF\_DAC\_CFG (Address 0x87)**

**Figure 95:**  
EAF\_DAC\_CFG Register


| Addr: 0x85 |                        | EAF_DAC_CFG |        |  |         |         |   |                      |   |                        |   |                        |   |                        |
|------------|------------------------|-------------|--------|--|---------|---------|---|----------------------|---|------------------------|---|------------------------|---|------------------------|
| Bit        | Bit Name               | Default     | Access | Bit Description  |         |         |   |                      |   |                        |   |                        |   |                        |
| 7:2        | Not used               | 0           | RW     | Not used   |         |         |   |                      |   |                        |   |                        |   |                        |
| 1:0        | dac_mode               | 0           | RW     | <p>DAC mode The EAF has a DAC that can be switched out on GPIOs.</p> <p>dac_mode 0 uses statically dac1_value, the other modes switch dynamically between the two values.</p> <p>The system switches from one value to the next always at the beginning of a sequence in which the ADC will sample the AFE channel.</p> <table border="1"> <thead> <tr> <th>Setting</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1-1-1-1-1-1-1-1-1-1-</td> </tr> <tr> <td>1</td> <td>1-2-1-2-1-2-1-2-1-2-1-</td> </tr> <tr> <td>2</td> <td>1-1-2-2-1-1-2-2-1-1-2-</td> </tr> <tr> <td>3</td> <td>1-1-1-1-2-2-2-2-1-1-1-</td> </tr> </tbody> </table> | Setting | Meaning | 0 | 1-1-1-1-1-1-1-1-1-1- | 1 | 1-2-1-2-1-2-1-2-1-2-1- | 2 | 1-1-2-2-1-1-2-2-1-1-2- | 3 | 1-1-1-1-2-2-2-2-1-1-1- |
| Setting    | Meaning                |             |        |  |         |         |   |                      |   |                        |   |                        |   |                        |
| 0          | 1-1-1-1-1-1-1-1-1-1-   |             |        |  |         |         |   |                      |   |                        |   |                        |   |                        |
| 1          | 1-2-1-2-1-2-1-2-1-2-1- |             |        |  |         |         |   |                      |   |                        |   |                        |   |                        |
| 2          | 1-1-2-2-1-1-2-2-1-1-2- |             |        |  |         |         |   |                      |   |                        |   |                        |   |                        |
| 3          | 1-1-1-1-2-2-2-2-1-1-1- |             |        |  |         |         |   |                      |   |                        |   |                        |   |                        |

**Possible Configurations of Every Amplifier Stage**


**Figure 96:**  
Non Inverting Amplifier with Offset and Input Voltage Divider (Temperature Sensor)

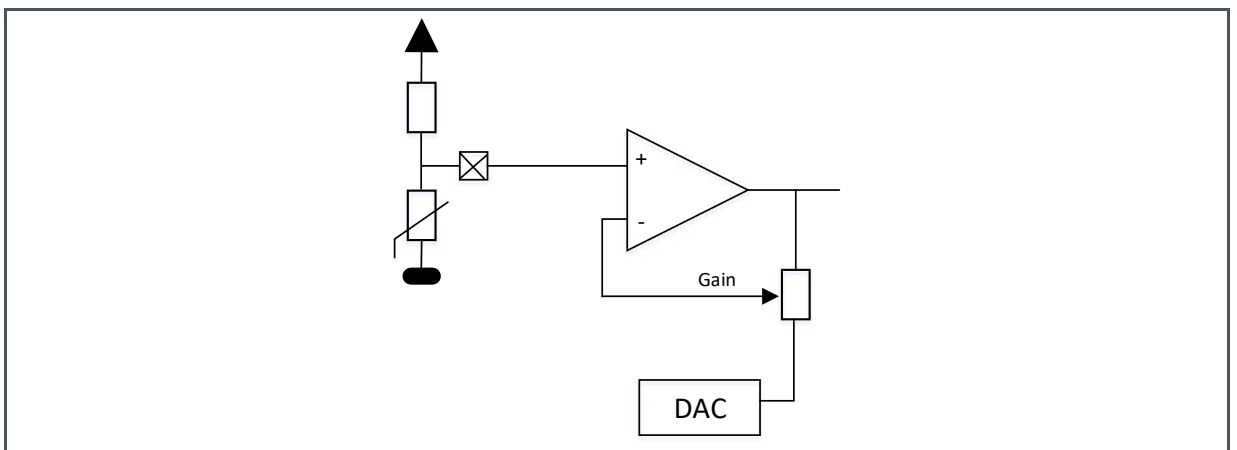


**Figure 97:**  
**Non Inverting Amplifier with Current Source and Offset (Temperature Sensor)**

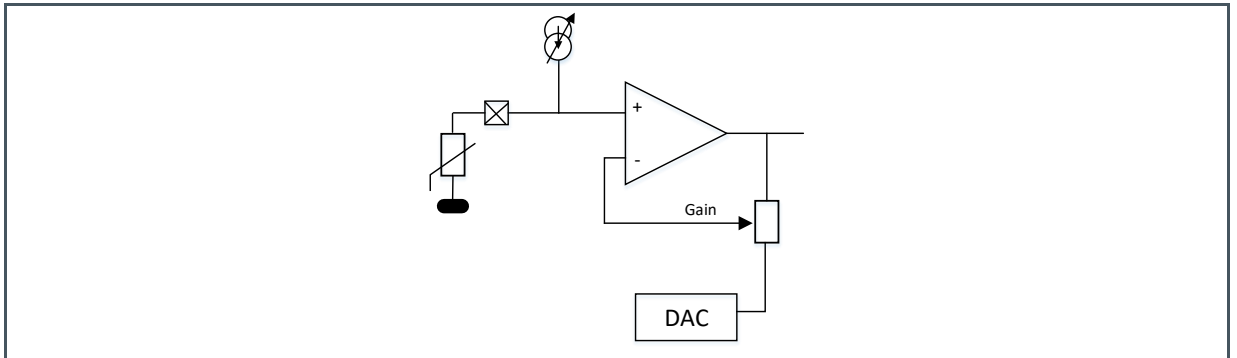


**Figure 98:**  
**Non Inverting Amplifier with Current Source and Reference Path (Temperature Sensor)**

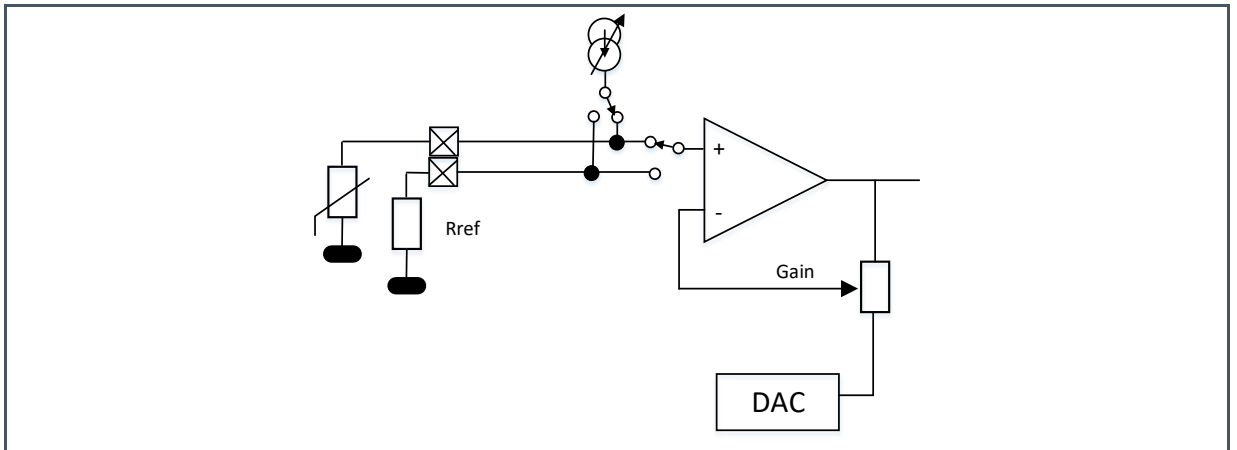


**Figure 99:**  
**Non Inverting Amplifier High Impedance, GND Referenced**

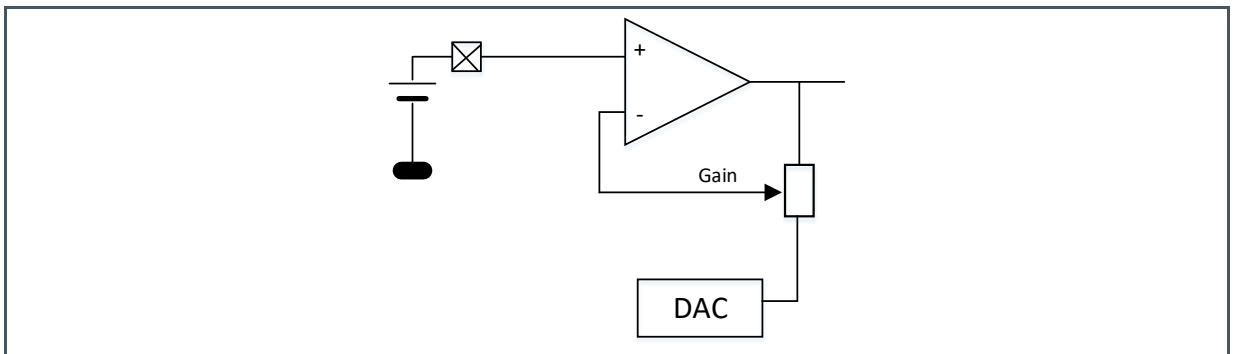

**Figure 100:**  
Non Inverting Amplifier with DC-Blocking, Referenced to  $V_{\text{ADCRef}}/2$

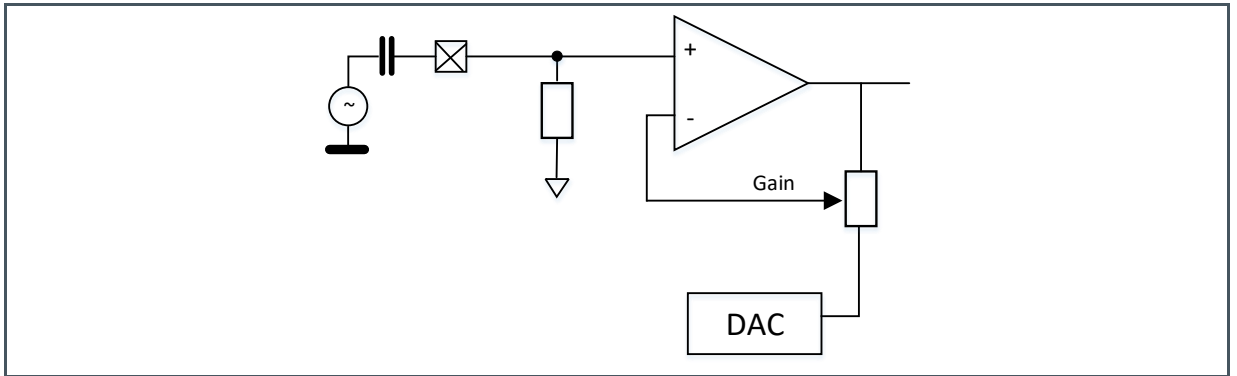


**Figure 101:**  
Non Inverting Amplifier with DC-Blocking and Fast Settling Time, Referenced to  $\text{ADCRef} / 2$

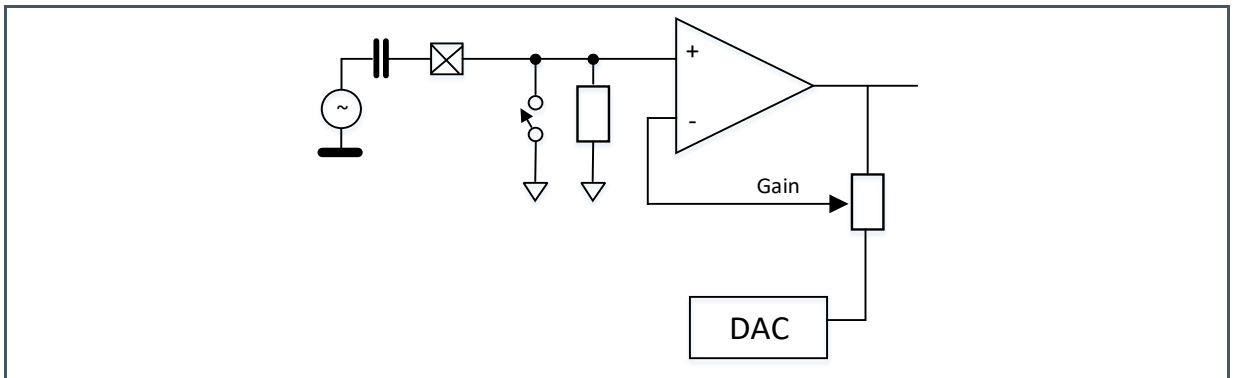

### 7.1.15 ECG Amplifier


Figure 102:  
ECG Amplifier

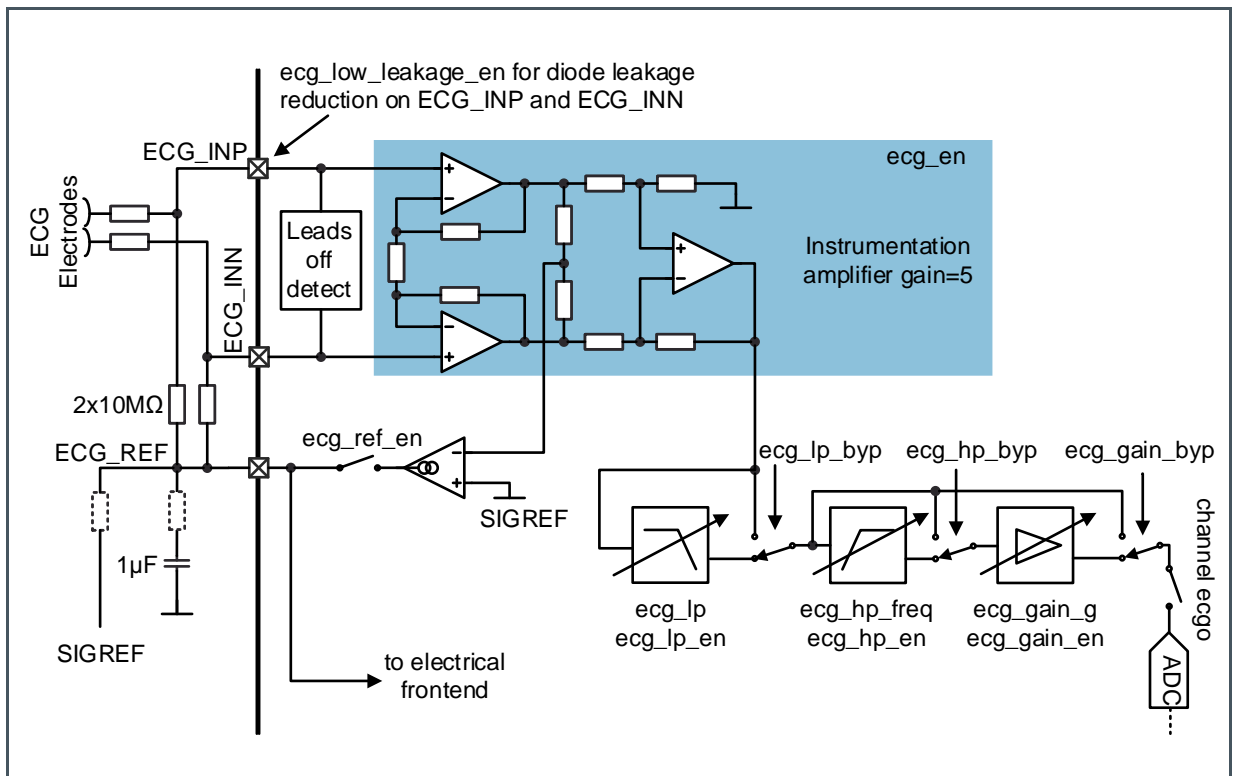

The ECG (electro cardiogram) amplifier is a high impedance, low noise instrumentation amplifier with analog circuitry to bandpass filter the signal and amplify it before converting it with the ADC.

**ECG Lead OFF Detection**

**Figure 103:**  
**ECG Lead OFF Detection Internal Circuit**

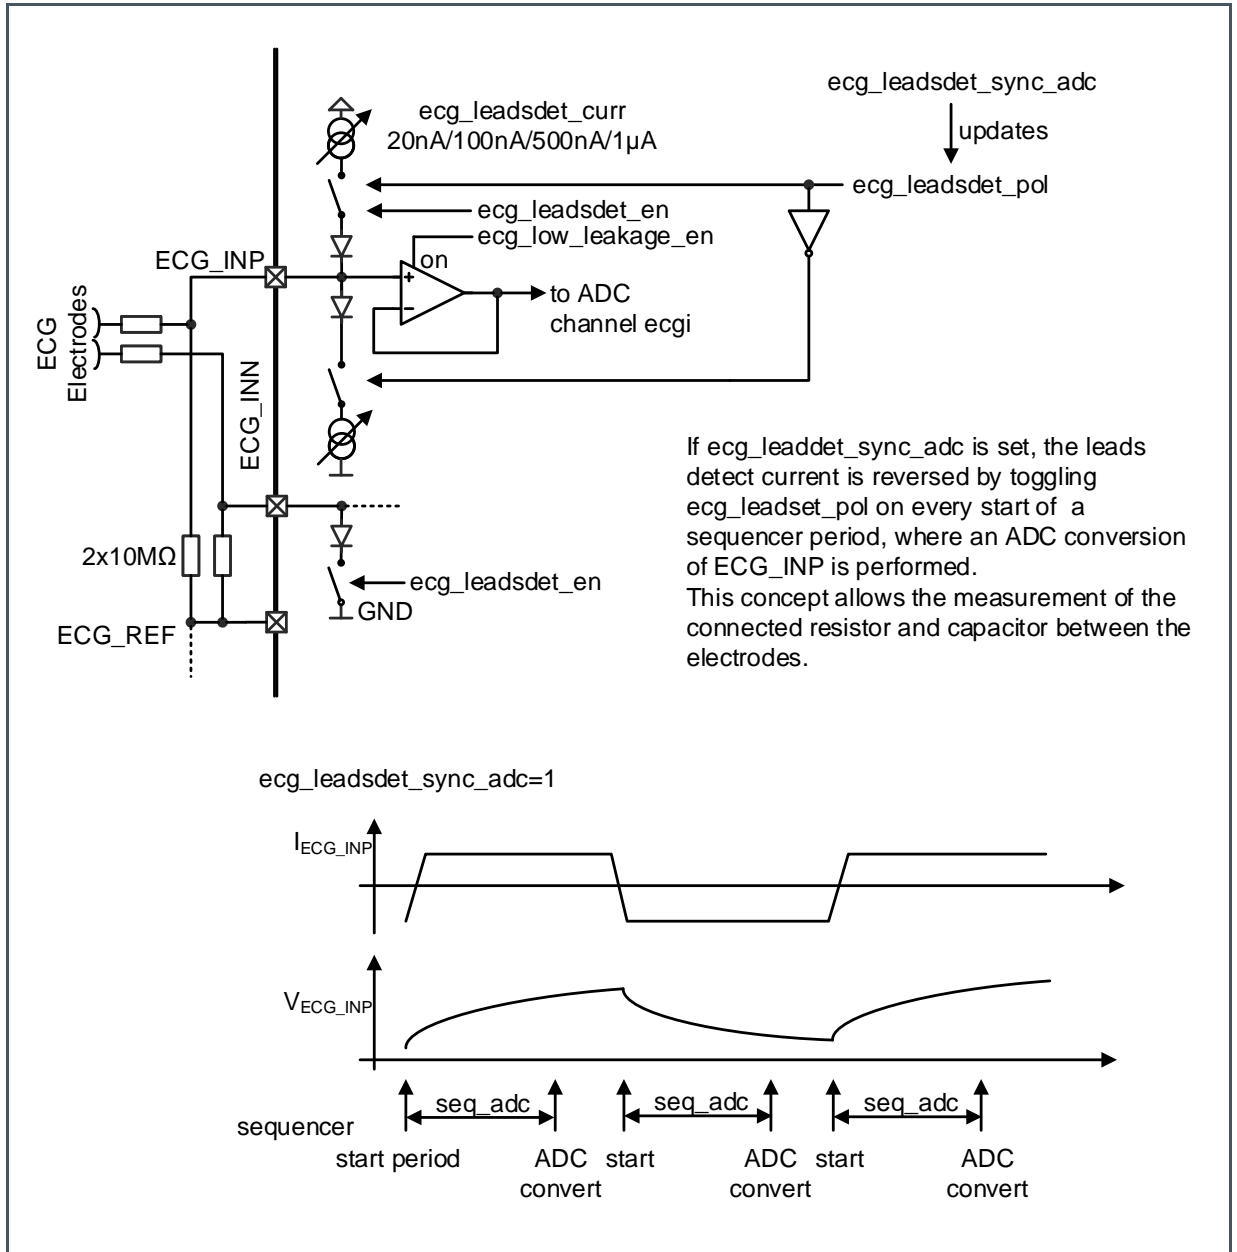

The ECG lead OFF detection can be used for detection if the user actually touches the leads. It is a circuitry to measure the capacitor and/or resistance between the two lead inputs ECG\_INP and ECG\_INN.



### 7.1.16 ECG Registers

#### ECG\_CFGA (Address 0x5c)

Figure 104:  
ECG\_CFGA Register

| Addr: 0x5c |              | ECG_CFGA |        |   |
|------------|--------------|----------|--------|---|
| Bit        | Bit Name     | Default  | Access | Bit Description   |
| 7          | ecg_en       | 0        | RW     | Enable ECG instrumentation amplifier                                      |
| 6          | not used     | 0        | RW     | Do not rely on the content of this register                               |
| 5          | ecg_lp_en    | 0        | RW     | 0 ... LP filter disabled<br>1 ... LP filter enabled                       |
| 4          | ecg_hp_en    | 0        | RW     | 0 ... Power down of the high pass filter<br>1 ... Enable high pass filter |
| 3          | ecg_gain_en  | 0        | RW     | 0 ... Power down of the Gain stage<br>1 ... Enable Gain stage             |
| 2          | ecg_lp_byp   | 0        | RW     | 0 ... LP stage is used<br>1 ... LP stage is bypassed                      |
| 1          | ecg_hp_byp   | 0        | RW     | 0 ... HP filter is used<br>1 ... HP filter is bypassed                    |
| 0          | ecg_gain_byp | 0        | RW     | 0 ... Gain stage is used<br>1 ... Gain stage is bypassed                  |

#### ECG\_CFGB (Address 0x5d)

Figure 105:  
ECG\_CFGB Register

| Addr: 0x5d |             | ECG_CFGB |        |  |         |           |   |       |   |       |   |        |   |        |
|------------|-------------|----------|--------|--|---------|-----------|---|-------|---|-------|---|--------|---|--------|
| Bit        | Bit Name    | Default  | Access | Bit Description  |         |           |   |       |   |       |   |        |   |        |
| 7          | Not used    | 0        | RW     | Do not used  |         |           |   |       |   |       |   |        |   |        |
|            |             |          |        | ECG low pass filter  |         |           |   |       |   |       |   |        |   |        |
|            |             |          |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Frequency</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>40 Hz</td> </tr> <tr> <td>1</td> <td>80 Hz</td> </tr> <tr> <td>3</td> <td>160 Hz</td> </tr> <tr> <td>4</td> <td>320 Hz</td> </tr> </tbody> </table> | Setting | Frequency | 0 | 40 Hz | 1 | 80 Hz | 3 | 160 Hz | 4 | 320 Hz |
| Setting    | Frequency   |          |        |  |         |           |   |       |   |       |   |        |   |        |
| 0          | 40 Hz       |          |        |  |         |           |   |       |   |       |   |        |   |        |
| 1          | 80 Hz       |          |        |  |         |           |   |       |   |       |   |        |   |        |
| 3          | 160 Hz      |          |        |  |         |           |   |       |   |       |   |        |   |        |
| 4          | 320 Hz      |          |        |  |         |           |   |       |   |       |   |        |   |        |
| 6:5        | ecg_lp_freq | 0        | RW     |  |         |           |   |       |   |       |   |        |   |        |

| Addr: 0x5d   |                  | ECG_CFGB         |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
|--|------------------|------------------|--------|-----------------|---------|------------------|------------------|---|--------|---------|---|--------|---------|---|---------|---------|---|---------|----------|----|---|-----|
| Bit  | Bit Name         | Default          | Access | Bit Description |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| High pass filter cutoff frequency  |                  |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| <table border="1"> <thead> <tr> <th>Setting</th> <th>Filter Frequency</th> <th>Cutoff Frequency</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>122 Hz</td> <td>0.33 Hz</td> </tr> <tr> <td>1</td> <td>488 Hz</td> <td>1.32 Hz</td> </tr> <tr> <td>2</td> <td>1935 Hz</td> <td>5.28 Hz</td> </tr> <tr> <td>3</td> <td>3906 Hz</td> <td>10.56 Hz</td> </tr> </tbody> </table>         |                  |                  |        |                 | Setting | Filter Frequency | Cutoff Frequency | 0 | 122 Hz | 0.33 Hz | 1 | 488 Hz | 1.32 Hz | 2 | 1935 Hz | 5.28 Hz | 3 | 3906 Hz | 10.56 Hz |    |   |     |
| Setting  | Filter Frequency | Cutoff Frequency |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 0  | 122 Hz           | 0.33 Hz          |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 1  | 488 Hz           | 1.32 Hz          |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 2  | 1935 Hz          | 5.28 Hz          |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 3  | 3906 Hz          | 10.56 Hz         |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 4:3  | ecg_hp_freq      | 0                | RW     |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| Gain   |                  |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| <table border="1"> <thead> <tr> <th>Setting</th> <th>Gain</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>1</td> </tr> <tr> <td>1</td> <td>2</td> </tr> <tr> <td>2</td> <td>4</td> </tr> <tr> <td>3</td> <td>8</td> </tr> <tr> <td>4</td> <td>16</td> </tr> <tr> <td>5</td> <td>32</td> </tr> <tr> <td>6</td> <td>64</td> </tr> <tr> <td>7</td> <td>128</td> </tr> </tbody> </table> |                  |                  |        |                 | Setting | Gain             | 0                | 1 | 1      | 2       | 2 | 4      | 3       | 8 | 4       | 16      | 5 | 32      | 6        | 64 | 7 | 128 |
| Setting  | Gain             |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 0  | 1                |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 1  | 2                |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 2  | 4                |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 3  | 8                |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 4  | 16               |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 5  | 32               |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 6  | 64               |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 7  | 128              |                  |        |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |
| 2:0  | ecg_gain_g       | 0                | RW     |                 |         |                  |                  |   |        |         |   |        |         |   |         |         |   |         |          |    |   |     |

**ECG\_CFGC (Address 0x5e)**

**Figure 106:**  
ECG\_CFGC Register

| Addr: 0x5e |                    | ECG_CFGC |        |   |
|------------|--------------------|----------|--------|---|
| Bit        | Bit Name           | Default  | Access | Bit Description                         |
| 7:2        | Not used           | 0        | RW     | Do not use                              |
| 1          | ecg_low_leakage_en | 0        | RW     | Enable ECG leakage compensation         |
| 0          | ecg_ref_en         | 0        | RW     | ECG Reference Feedback Amplifier Enable |

**ECG\_CFGD (Address 0x5f)**

**Figure 107:**  
**ECG\_CFGD Register**


| Addr: 0x5f |                       | ECG_CFGD |        |  |         |         |   |       |   |        |   |        |   |           |
|------------|-----------------------|----------|--------|--|---------|---------|---|-------|---|--------|---|--------|---|-----------|
| Bit        | Bit Name              | Default  | Access | Bit Description  |         |         |   |       |   |        |   |        |   |           |
| 7:5        | Not used              | 0        | RW     | Do not use   |         |         |   |       |   |        |   |        |   |           |
| 4          | ecg_leadsdet_sync_adc | 0        | RW     | ECG Leads Detection Automatic Update. If this is asserted, then ecg_leadsdet_pol is inverted automatically at the start of a sequence (at count=2) if in this sequence the ADC will convert the ECGi channel.  |         |         |   |       |   |        |   |        |   |           |
| 3          | ecg_leadsdet_pol      | 0        | RW     | ECG Leads Detection Polarity. Can be written to manually if ecg_leadsdet_sync_adc is clear, otherwise it is automatically toggled.   |         |         |   |       |   |        |   |        |   |           |
|            |                       |          |        | ECG Leads Detection Current  |         |         |   |       |   |        |   |        |   |           |
|            |                       |          |        | <table border="1"> <thead> <tr> <th>Setting</th> <th>Current</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>20 nA</td> </tr> <tr> <td>1</td> <td>100 nA</td> </tr> <tr> <td>2</td> <td>500 nA</td> </tr> <tr> <td>3</td> <td>1 <math>\mu</math>A</td> </tr> </tbody> </table> | Setting | Current | 0 | 20 nA | 1 | 100 nA | 2 | 500 nA | 3 | 1 $\mu$ A |
| Setting    | Current               |          |        |  |         |         |   |       |   |        |   |        |   |           |
| 0          | 20 nA                 |          |        |  |         |         |   |       |   |        |   |        |   |           |
| 1          | 100 nA                |          |        |  |         |         |   |       |   |        |   |        |   |           |
| 2          | 500 nA                |          |        |  |         |         |   |       |   |        |   |        |   |           |
| 3          | 1 $\mu$ A             |          |        |  |         |         |   |       |   |        |   |        |   |           |
| 2:1        | ecg_leadsdet_curr     | 0        | RW     |  |         |         |   |       |   |        |   |        |   |           |
| 0          | ecg_leadsdet_en       | 0        | RW     | ECG Leads Detection Enable   |         |         |   |       |   |        |   |        |   |           |

**7.1.17 ADC and FIFO**

The ADC is a 14-bit successive-approximation register (SAR) type. It supports 14-bit with conversion time up to 50 ksps.

The ADC is started by the sequencer and its timing or in manual mode (man\_mode=1) by setting seq\_start=1 (seq\_start stays '1' as long as the conversion runs). The AS7026GG can be configured to trigger an interrupt upon end of conversion.

**Figure 108:**  
**ADC Internal Circuit and Multiplexer**

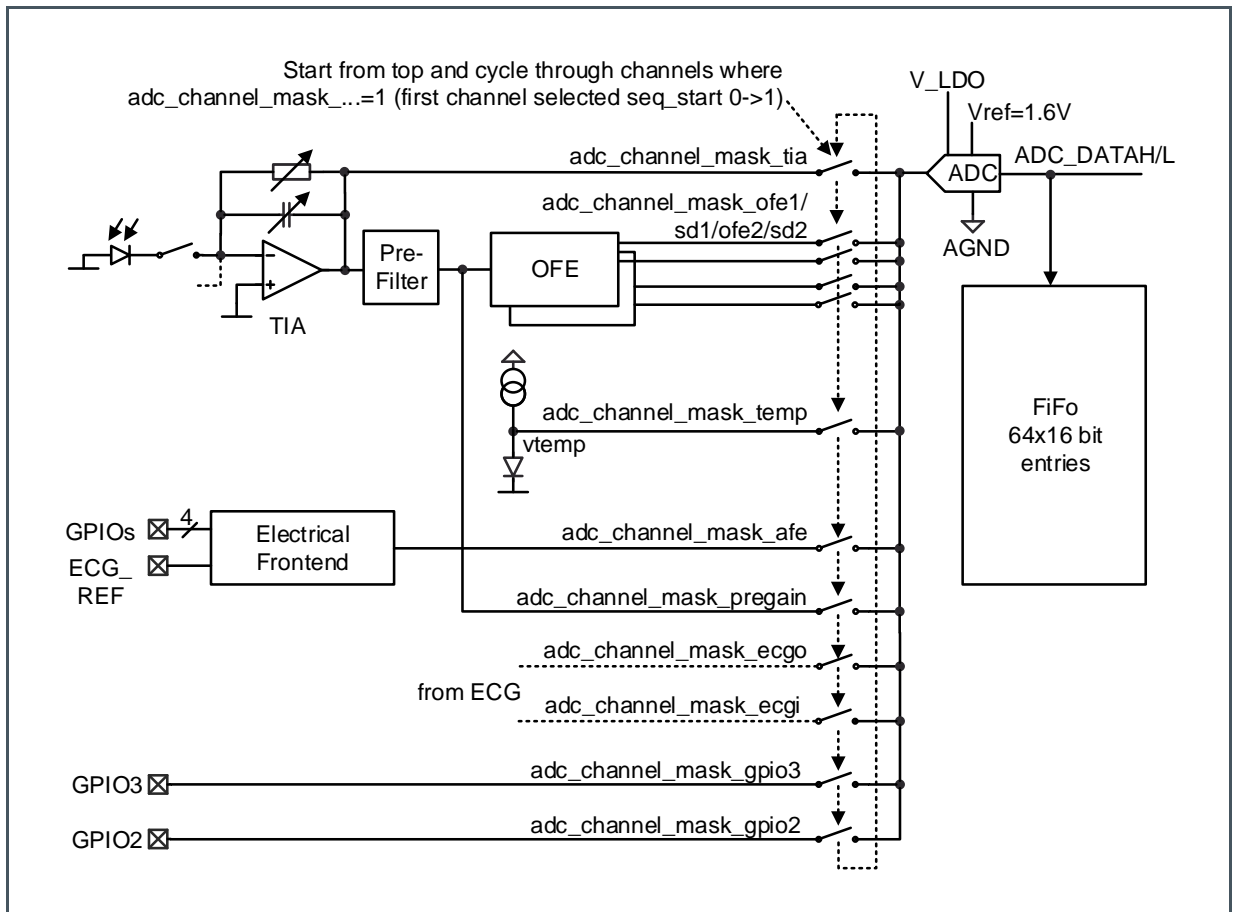

For best accuracy, the ADC can be optionally calibrated.



**Information**

If GPIO2 or GPIO3 is used as ADC input, there is no anti-aliasing filter in front of the ADC (needs to be added externally).

**7.1.18 ADC Threshold**

At the output of the ADC converter a digital threshold can be enabled. If the output of the ADC exceeds the threshold `adc_threshold`, it triggers an interrupt. This mechanism can be used to identify if an object is in proximity of the sensor and then to interrupt the host. In cases where no object is detected, the host can be sleeping therefore reducing power consumption of the system.

For detailed description of the threshold calculation see the register ADC\_THRESHOLD and ADC\_THRESHOLD\_CFG description

### 7.1.19 ADC Registers

#### ADC\_THRESHOLD (Address 0x68)

Figure 109:  
ADC\_THRESHOLD Register

| Addr: 0x68 |               | ADC_THRESHOLD |        |   |
|------------|---------------|---------------|--------|---|
| Bit        | Bit Name      | Default       | Access | Bit Description   |
| 7:0        | adc_threshold | 0xff          | RW     | If the ADC returns a value above adc_threshold (not equal), then the adc_threshold interrupt can be triggered. Note that when only the upper 8 bits are compared, the lower 6 bits are ignored. A value of 0xff can therefore never trigger the interrupt |

#### ADC\_THRESHOLD\_CFG (Address 0x69)

Figure 110:  
ADC\_THRESHOLD\_CFG Register

| Addr: 0x69 |                         | ADC_THRESHOLD_CFG |        |  |
|------------|-------------------------|-------------------|--------|--|
| Bit        | Bit Name                | Default           | Access | Bit Description  |
| 7:2        | Not Used                | 0                 | RW     | Not used   |
| 1          | adc_thresh_differential | 0                 | RW     | If adc_thresh_tiaonly is asserted and any of seq_adc[23]tia is non-zero, meaning that there are two or three ADC TIA measurements in one sequencer period, then the second is subtracted from the first, and the <i>difference</i> is being compared to the adc_threshold. |
| 0          | adc_thresh_tiaonly      | 0                 | RW     | Normally, the adc_threshold works regardless of the adc channel. If this bit is set, then the threshold is only checked if the adc channel is TIA  |

**ADC\_CFGA (Address 0x88)**

**Figure 111:**  
**ADC\_CFGA Register**

| Addr: 0x88 |               | ADC_CFGA |        |   |
|------------|---------------|----------|--------|---|
| Bit        | Bit Name      | Default  | Access | Bit Description   |
| 7:4        | Not Used      | 0        | RW     | Not used  |
| 3:1        | adc_multi_n   | 0        | RW     | Defines number of samples that are taken in multimode (adc_multimode =1)  |
|            |               |          |        | <b>Setting</b>  |
|            |               |          |        | <b>Number of Samples per ADC Conversion Command</b>   |
|            |               |          |        | 0   |
|            |               |          |        | 1   |
|            |               |          |        | 2   |
|            |               |          |        | 3   |
|            |               |          |        | 4   |
|            |               |          |        | 5   |
|            |               |          |        | 6   |
|            |               |          |        | 7   |
| 0          | adc_multimode | 0        | RW     | 0 ... If ADC is started one sample is measured<br>1 ... If ADC is started multiple samples are stored in sequence in the FIFO. The number of samples is defined with "adc_multi_n". |



**Information**

If the ADC is triggered with the sequencer, the very first ADC conversion after seq\_en=1 stores the number of samples according to above table. All subsequent samples use one sample less (e.g. 7 instead of 8).

**ADC\_CFGB (Address 0x89)**

Figure 112:  
ADC\_CFGB Register

| Addr: 0x89   |                 | ADC_CFGB |        |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
|--|-----------------|----------|--------|---|---------|---------|----|-----|---|---|---|------|---|---|---|-----|---|---|---|-----|---|---|---|-----|---|----|---|-----|---|----|---|-----|---|----|---|-----|---|----|---|-----|
| Bit  | Bit Name        | Default  | Access | Bit Description   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 7:6  | Not Used        | 0        | RW     | Not used  |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| ADC clock divider:<br>The ADC clock is freely configurable   |                 |          |        |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| <table border="1"> <thead> <tr> <th>Setting</th> <th>Periods</th> <th>µs</th> <th>kHz</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>2</td> <td>1</td> <td>1000</td> </tr> <tr> <td>1</td> <td>4</td> <td>2</td> <td>500</td> </tr> <tr> <td>2</td> <td>6</td> <td>3</td> <td>333</td> </tr> <tr> <td>3</td> <td>8</td> <td>4</td> <td>250</td> </tr> <tr> <td>4</td> <td>10</td> <td>5</td> <td>200</td> </tr> <tr> <td>5</td> <td>12</td> <td>6</td> <td>167</td> </tr> <tr> <td>6</td> <td>14</td> <td>7</td> <td>143</td> </tr> <tr> <td>7</td> <td>16</td> <td>8</td> <td>125</td> </tr> </tbody> </table> |                 |          |        |   | Setting | Periods | µs | kHz | 0 | 2 | 1 | 1000 | 1 | 4 | 2 | 500 | 2 | 6 | 3 | 333 | 3 | 8 | 4 | 250 | 4 | 10 | 5 | 200 | 5 | 12 | 6 | 167 | 6 | 14 | 7 | 143 | 7 | 16 | 8 | 125 |
| Setting  | Periods         | µs       | kHz    |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 0  | 2               | 1        | 1000   |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 1  | 4               | 2        | 500    |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 2  | 6               | 3        | 333    |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 3  | 8               | 4        | 250    |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 4  | 10              | 5        | 200    |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 5  | 12              | 6        | 167    |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 6  | 14              | 7        | 143    |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 7  | 16              | 8        | 125    |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 5:3  | adc_clock       | 0        | RW     |   |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 2  | adc_calibration | 0        | RW     | To activate the optional self calibration, this bit must be asserted, and an ADC “conversion” has to be started in manual mode (man_mode=1) by asserting seq_start.               |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 1  | ulp             | 0        | RW     | Ultra low power bit for the sequencer. If this bit is set and sd_subs>0, it disables the LED pulses and powers off the TIA in all sequences but the one where the TIA is sampled. |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |
| 0  | adc_en          | 0        | RW     | 0 ... Reset ADC<br>1 ... Enable ADC<br>Warning: In reset state the ADC clears its calibration data. Re-calibration is necessary next time it is enabled again.                    |         |         |    |     |   |   |   |      |   |   |   |     |   |   |   |     |   |   |   |     |   |    |   |     |   |    |   |     |   |    |   |     |   |    |   |     |

**ADC\_CFGC (Address 0x8a)**

Figure 113:  
ADC\_CFGC Register

| Addr: 0x8a |          | ADC_CFGC |        |                 |
|------------|----------|----------|--------|-----------------|
| Bit        | Bit Name | Default  | Access | Bit Description |
| 7:5        | Not Used | 0        | RW     | Not used        |

| Addr: 0x8a |                   | ADC_CFGC      |               |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
|------------|-------------------|---------------|---------------|--|---------|---------|---------------|---------------|---|---|---|---|---|---|---|----|---|---|----|----|---|----|----|----|---|----|----|-----|---|----|-----|-----|---|-----|-----|-----|---|-----|-----|------|
| Bit        | Bit Name          | Default       | Access        | Bit Description  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 4          | adc_selfpd        | 0             | RW            | 1 ... Power down the ADC when not converting; use this to conserve power, but set adc_settling_time to minimum 64µs to permit settling of the ADC reference buffer.<br>0 ... Always enable ADC   |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 3          | adc_discharge     | 0             | RW            | 0: Suppress ADC capacitor discharging – use with caution<br>1: Discharge ADC capacitor before tracking<br>If asserted, the capacitor is discharged before the tracking phase. If zero, the discharge phase is suppressed and the tracking phase is started one cycle earlier   |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 2:0        | adc_settling_time | 0             | RW            | ADC settling time: Use with synchronous demodulator. It defines the number of ADC clock cycles the sampling window is kept open additionally.<br>If the gain stage in the optical frontend is used (gain_byp=0), set this to minimum 8 µs. If adc_selfpd=1, set this to minimum 64 µs.   |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
|            |                   |               |               | <table border="1"> <thead> <tr> <th>Setting</th> <th>Periods</th> <th>µs (@500 kHz)</th> <th>µs (@250 kHz)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1</td> <td>4</td> <td>8</td> <td>16</td> </tr> <tr> <td>2</td> <td>8</td> <td>16</td> <td>32</td> </tr> <tr> <td>3</td> <td>16</td> <td>32</td> <td>64</td> </tr> <tr> <td>4</td> <td>32</td> <td>64</td> <td>128</td> </tr> <tr> <td>5</td> <td>64</td> <td>128</td> <td>256</td> </tr> <tr> <td>6</td> <td>128</td> <td>256</td> <td>512</td> </tr> <tr> <td>7</td> <td>256</td> <td>512</td> <td>1 ms</td> </tr> </tbody> </table> | Setting | Periods | µs (@500 kHz) | µs (@250 kHz) | 0 | 0 | 0 | 0 | 1 | 4 | 8 | 16 | 2 | 8 | 16 | 32 | 3 | 16 | 32 | 64 | 4 | 32 | 64 | 128 | 5 | 64 | 128 | 256 | 6 | 128 | 256 | 512 | 7 | 256 | 512 | 1 ms |
| Setting    | Periods           | µs (@500 kHz) | µs (@250 kHz) |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 0          | 0                 | 0             | 0             |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 1          | 4                 | 8             | 16            |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 2          | 8                 | 16            | 32            |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 3          | 16                | 32            | 64            |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 4          | 32                | 64            | 128           |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 5          | 64                | 128           | 256           |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 6          | 128               | 256           | 512           |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |
| 7          | 256               | 512           | 1 ms          |  |         |         |               |               |   |   |   |   |   |   |   |    |   |   |    |    |   |    |    |    |   |    |    |     |   |    |     |     |   |     |     |     |   |     |     |      |

**ADC\_CHANNEL\_MASK\_L (Address 0x8b)**

Figure 114:  
ADC\_CHANNEL\_MASK\_L Register

| Addr: 0x8b |                          | ADC_CHANNEL_MASK_L |        |                           |
|------------|--------------------------|--------------------|--------|---------------------------|
| Bit        | Bit Name                 | Default            | Access | Bit Description           |
| 7          | adc_channel_mask_pregain | 0                  | RW     | Pregain channel selection |
| 6          | adc_channel_mask_afe     | 0                  | RW     | Electrical front end      |



| Addr: 0x8b |                       | ADC_CHANNEL_MASK_L |        |   |  |
|------------|-----------------------|--------------------|--------|---|--|
| Bit        | Bit Name              | Default            | Access | Bit Description   |  |
| 5          | adc_channel_mask_temp | 0                  | RW     | Temperature measurement                                   |  |
| 4          | adc_channel_mask_sd2  | 0                  | RW     | Synchronous modulator 2 output just before the gain stage |  |
| 3          | adc_channel_mask_ofe2 | 0                  | RW     | Synchronous modulator 2 output after the gain stage       |  |
| 2          | adc_channel_mask_sd1  | 0                  | RW     | Synchronous modulator 1 output just before the gain stage |  |
| 1          | adc_channel_mask_ofe1 | 0                  | RW     | Synchronous modulator 1 output after the gain stage       |  |
| 0          | adc_channel_mask_tia  | 0                  | RW     | Transimpedance amplifier output                           |  |

The adc channel is chosen automatically from the bits within the adc\_channel\_mask\_\* set. It starts from right and finishes left (LSB->MSB) and wraps back from the most significant asserted bit to the least significant of the asserted bits. After every ADC conversion it switches to the next enabled channel, (except around the adc2tia/adc3tia cases). See register description FIFOH and FIFOL for encoding of the first channel in the data stream.

This applies to both, manual mode and sequencer mode. In sequencer mode, it starts with the smallest channel when the sequencer is being started. In manual mode, the adc\_sel is reset with every write to either ADC\_CHANNEL\_MASK\_L or ADC\_CHANNEL\_MASK\_H.

### ADC\_CHANNEL\_MASK\_H (Address 0x8c)

Figure 115:  
ADC\_CHANNEL\_MASK\_H Register

| Addr: 0x8c |                        | ADC_CHANNEL_MASK_H |        |  |  |
|------------|------------------------|--------------------|--------|--|--|
| Bit        | Bit Name               | Default            | Access | Bit Description  |  |
| 7:4        | Not used               | 0                  | RW     | Not used   |  |
| 3          | adc_channel_mask_gpio2 | 0                  | RW     | GPIO2 input – set gpio2_a=1 and<br>Write 0x47 to register 0xC6<br>Write 0x0C to register 0xC2<br>Write 0x0C to register 0xC3 |  |
| 2          | adc_channel_mask_gpio3 | 0                  | RW     | GPIO3 input – set gpio3_a=1 and<br>Write 0x47 to register 0xC6<br>Write 0x0C to register 0xC2<br>Write 0x0C to register 0xC3 |  |
| 1          | adc_channel_mask_ecgi  | 0                  | RW     | ECG amplifier input – use for leads off detection  |  |

| Addr: 0x8c |                       | ADC_CHANNEL_MASK_H |        |   |
|------------|-----------------------|--------------------|--------|---|
| Bit        | Bit Name              | Default            | Access | Bit Description                             |
| 0          | adc_channel_mask_ecgo | 0                  | RW     | ECG amplifier output – amplified ECG signal |

**ADC\_DATA\_L (Address 0x8e)**

Figure 116:  
ADC\_DATA\_L Register

| Addr: 0x8e |               | ADC_DATA_L |        |                              |
|------------|---------------|------------|--------|------------------------------|
| Bit        | Bit Name      | Default    | Access | Bit Description              |
| 7:0        | adc_data[7:0] | 0          | RO     | Current ADC output: low byte |

The ADC\_DATA register shows the current raw output of the ADC.

**ADC\_DATA\_H (Address 0x8f)**

Figure 117:  
ADC\_DATA\_H Register

| Addr: 0x8f |                | ADC_DATA_H |        |  |
|------------|----------------|------------|--------|--|
| Bit        | Bit Name       | Default    | Access | Bit Description  |
| 7:6        | Not used       | 0          | RO     | Not used   |
| 5:0        | adc_data[13:8] | 0          | RO     | Current ADC output: high byte warning: there is no latch mechanism implemented to guarantee consistency if the ADC is possibly running when reading this register, then the data can be corrupted - use the FIFO to guarantee data consistency |

### 7.1.20 FIFO Registers

#### FIFO\_CFG (Address 0x78)

Figure 118:  
FIFO\_CFG Register

| Addr: 0x78 |                | FIFO_CFG |        |   |
|------------|----------------|----------|--------|---|
| Bit        | Bit Name       | Default  | Access | Bit Description   |
| 7:6        | Not used       | 0        | RW     | Not used  |
| 5:0        | fifo_threshold | 0        | RW     | FIFO threshold. The fifo_threshold interrupt is flagged if there are more than this many entries in the FIFO.<br>0 ... Interrupt with 1 (16-bit) entry in FIFO<br>63 ... Interrupt when FIFO is full but one; note that the FIFO is 64 entries deep |

#### FIFO\_CNTRL (Address 0x79)

Figure 119:  
FIFO\_CNTRL Register

| Addr: 0x79 |            | FIFO_CNTRL |        |   |
|------------|------------|------------|--------|---|
| Bit        | Bit Name   | Default    | Access | Bit Description   |
| 7:1        | Not used   | 0          | RW     | Not used  |
| 0          | fifo_clear | 0          | PUSH1  | Write a 1 here to clear the FIFO.<br>Can be useful when switching from one sequencer mode to another to make sure that there are no old FIFO entries left |

**FIFOSTATUS (Address 0xa3)****Figure 120:**  
FIFOSTATUS Register

| Addr: 0xa3 |              | FIFOSTATUS |        |                           |
|------------|--------------|------------|--------|---------------------------|
| Bit        | Bit Name     | Default    | Access | Bit Description           |
| 7          | fifooverflow | 0          | RO     | FIFO overflow indicator   |
| 6:0        | fifolevel    | 0          | RO     | FIFO fill level (0 ...64) |

**FIFOL (Address 0xfe)****Figure 121:**  
FIFOL Register

| Addr: 0xfe |          | FIFOL   |         |                  |
|------------|----------|---------|---------|------------------|
| Bit        | Bit Name | Default | Access  | Bit Description  |
| 7:0        | fifol    | 0       | PUSHPOP | Low byte of FIFO |

FIFOL can be read out with single reads (2 consecutive I<sup>2</sup>C addresses have to be read to get one FIFO entry) or with block-read (up to 2 x fifo\_depth values can be read in a single block-read)

Upon reading of FIFOH, it automatically advances the internal read pointer and decreases FIFO level. If reading beyond end of FIFO, data will return 00h. There is no underrun flag, this is not an error condition.

Use **ams** SDK functions to read from the FIFO register to keep the reading in synchronization with the ADC channel selection. If synchronization is no concern use [fifoh[7:0] : fifol[7:2]] as ADC result as the ADC data is multiplied by x4 before it is pushed in to the FIFO. FIFO[0] is used as an ADC first channel indication. The first channel indication bit toggles upon every new entry unless the first ADC channel is transmitted. Then toggling can be stopped for up to 5 FIFO entries and the very first stopping indicates the first ADC channel. To allow encoding of any number of ADC channels, the first ADC channel encoding is dropped from time to time.

**FIFOH (Address 0xff)**

Figure 122:  
FIFOH Register

| Addr: 0xff |          | FIFOH   |         |                   |
|------------|----------|---------|---------|-------------------|
| Bit        | Bit Name | Default | Access  | Bit Description   |
| 7:0        | fifoh    | 0       | PUSHPOP | High byte of FIFO |

See Interrupts for the actual FIFO interrupt.

**7.1.21 Digital Interface**


**Power Management**

After setting the pin ENABLE=1 the AS7026GG registers can be accessed by the I<sup>2</sup>C interface. Before enabling any additional function (current source, TIA, ADC...) set the bit ldo\_en=1 to set the internal LDO to normal mode.

For operating the ADC or the sequencer enable the oscillator by setting osc\_en=1

**GPIO Pins**

Figure 123:  
GPIO Internal Circuit

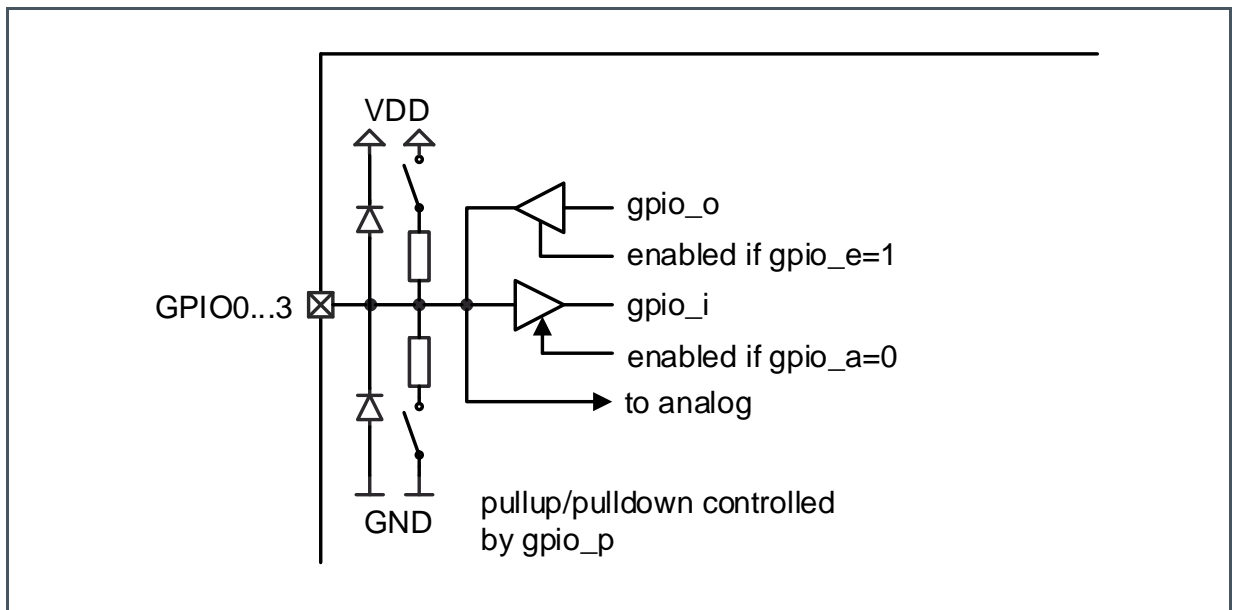

## Interrupts

An interrupt output pin INT can be used to interrupt the host. Following interrupt sources are possible:

**irq\_adc:** End of ADC conversion

**irq\_sequencer:** End of sequencer sequence reached.

**irq\_ltf:** A light-to-frequency conversion is finished.

**irq\_adc\_threshold:** ADC threshold triggered – see ADC Threshold.

**irq\_fifothreshold:** FIFO almost full (as defined in bit `fifo_threshold`)

**irq\_fifooverflow:** FIFO overflow (error condition, data is lost)

**irq\_clipdetect:** TIA output and/or SD output exceeded threshold– see details in CLIPSTATUS

**irq\_led\_supply\_low:** led supply low comparator triggered – see details in LEDSTATUS

Depending on the setting in register INTENAB each of the above interrupt source can assert INT output pin (active low).

---

## 7.2 I<sup>2</sup>C

The AS7026GG includes an I<sup>2</sup>C slave using an I<sup>2</sup>C address of 0x30 (7-bit format; R/W bit has to be added) respectively 60 h (8-bit format for writing) and 61 h (8-bit format for reading). It expects external pullup resistors.

### 7.2.1 I<sup>2</sup>C Serial Control Interface

#### I<sup>2</sup>C Feature List

- Fast mode (400 kHz) and standard mode (100 kHz) support
- 7+1-bit addressing mode
- Write formats: Single-Byte-Write, Page-Write
- Read formats: Current-Address-Read, Random-Read, Sequential-Read
- SDA input delay and SCL spike filtering by integrated RC-components

**I<sup>2</sup>C Protocol**

**Figure 124:**  
**I<sup>2</sup>C Symbol Definition**


| Symbol   | Definition                        | RW | Note               |
|----------|-----------------------------------|----|--------------------|
| S        | Start condition after stop        | R  | 1-bit              |
| Sr       | Repeated start                    | R  | 1-bit              |
| DW       | Device address for write          | R  | 0110 0000b (60 h)  |
| DR       | Device address for read           | R  | 0110 0001b (61 h)  |
| WA       | Word address                      | R  | 8-bit              |
| A        | Acknowledge                       | W  | 1-bit              |
| N        | No Acknowledge                    | R  | 1-bit              |
| reg_data | Register data/write               | R  | 8-bit              |
| data (n) | Register data/read                | W  | 8-bit              |
| P        | Stop condition                    | R  | 1-bit              |
| WA++     | Increment word address internally | R  | During acknowledge |

**I<sup>2</sup>C Symbol Definition:** Shows the symbols used in the following mode descriptions.

**I<sup>2</sup>C Write Access**


Byte Write and Page Write formats are used to write data to the slave

**Figure 125:**  
**I<sup>2</sup>C Byte Write**

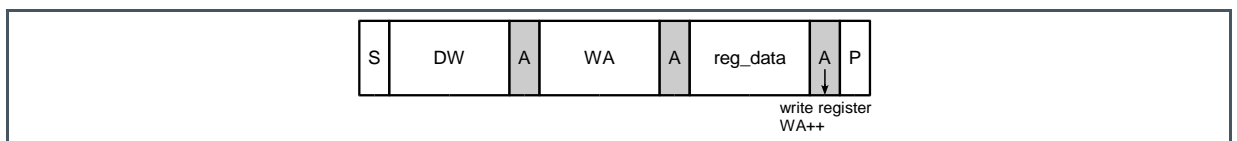

**I<sup>2</sup>C Byte Write:** Shows the format of an I<sup>2</sup>C byte write access

**Figure 126:**  
**I<sup>2</sup>C Page Write**

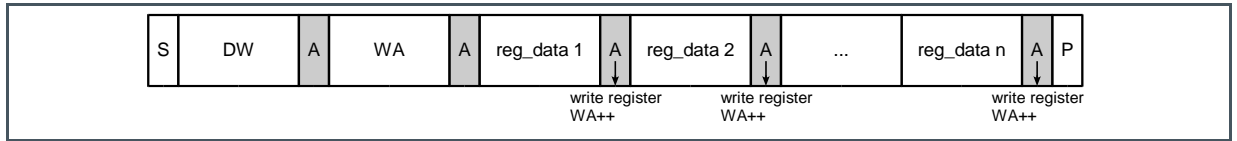


**I<sup>2</sup>C Page Write:** Shows the format of an I<sup>2</sup>C page write access

The transmission begins with the START condition, which is generated by the master when the bus is in IDLE state (the bus is free). The device-write address is followed by the word address. After the word address any number of data bytes can be sent to the slave. The word address is incremented internally, in order to write subsequent data bytes on subsequent address locations.

For reading data from the slave device, the master has to change the transfer direction. This can be done either with a repeated START condition followed by the device-read address, or simply with a new transmission START followed by the device-read address, when the bus is in IDLE state. The device-read address is always followed by the 1<sup>st</sup> register byte transmitted from the slave. In Read mode any number of subsequent register bytes can be read from the slave. The word address is incremented internally.

**Figure 127:**  
**I<sup>2</sup>C Random Read**

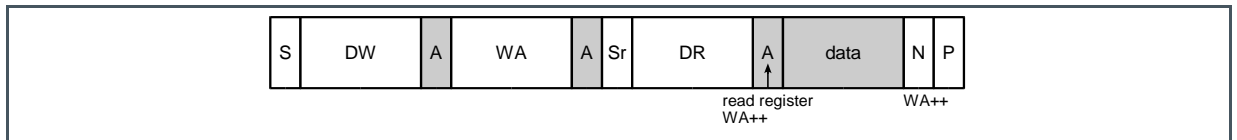

**I<sup>2</sup>C Random Read:** Shows the format of an I<sup>2</sup>C random read access


Random Read and Sequential Read are combined formats. The repeated START condition is used to change the direction after the data transfer from the master.

The word address transfer is initiated with a START condition issued by the master while the bus is idle. The START condition is followed by the device-write address and the word address.

In order to change the data direction a repeated START condition is issued on the 1<sup>st</sup> SCL pulse after the acknowledge bit of the word address transfer. After the reception of the device-read address, the slave becomes the transmitter. In this state the slave transmits register data located by the previous received word address vector. The master responds to the data byte with a not-acknowledge, and issues a STOP condition on the bus.




**Figure 128:**  
**I<sup>2</sup>C Sequential Read**

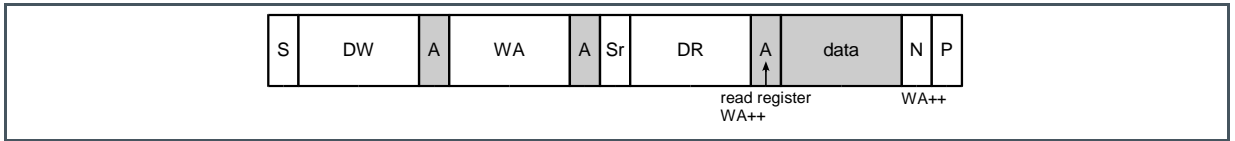

**I<sup>2</sup>C Sequential Read:** Shows the format of an I<sup>2</sup>C sequential read access

Sequential Read is the extended form of Random Read, as more than one register-data bytes are transferred subsequently. In difference to the Random Read, for a sequential read the transferred register-data bytes are responded by an acknowledge from the master. The number of data bytes transferred in one sequence is unlimited (consider the behavior of the word-address counter). To terminate the transmission the master has to send a not-acknowledge following the last data byte and generate the STOP condition subsequently.

**Figure 129:**  
**I<sup>2</sup>C Current Address Read**

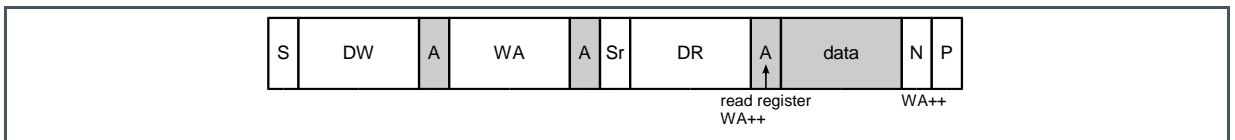

**I<sup>2</sup>C Current Address Read:** Shows the format of an I<sup>2</sup>C current address read access.

To keep the access time as small as possible, this format allows a read access without the word address transfer in advance to the data transfer. The bus is idle and the master issues a START condition followed by the Device-Read address. Analogous to Random Read, a single byte transfer is terminated with a not-acknowledge after the 1<sup>st</sup> register byte. Analogous to Sequential Read an unlimited number of data bytes can be transferred, where the data bytes has to be responded with an acknowledge from the master. For termination of the transmission the master sends a not-acknowledge following the last data byte and a subsequent STOP condition.

**CONTROL (Address 0x00)**

**Figure 130:**  
**CONTROL Register**

| Addr: 0x00 |          | CONTROL |        |                 |
|------------|----------|---------|--------|-----------------|
| Bit        | Bit Name | Default | Access | Bit Description |
| 7:2        | Not Used | 0       | RW     | Not Used        |

| Addr: 0x00 |          | CONTROL |        |  |
|------------|----------|---------|--------|--|
| Bit        | Bit Name | Default | Access | Bit Description  |
| 1          | osc_en   | 0       | RW     | Enable the oscillator. The oscillator must be enabled for any analog block (ADC, sequencer, optical frontend, sequencer); not mandatory for current sinks or ECG amplifier   |
| 0          | ldo_en   | 0       | RW     | If the EN input is not asserted, the chip is in reset. If asserted, I <sup>2</sup> C transactions are possible. Upon assertion of ldo_en, the reference and the LDO are enabled. The LDO must be enabled for anything but plain I <sup>2</sup> C register read/write |

**GPIO\_A (Address 0x08)**

Figure 131:  
GPIO\_A Register

| Addr: 0x08 |          | GPIO_A  |        |   |
|------------|----------|---------|--------|---|
| Bit        | Bit Name | Default | Access | Bit Description   |
| 7:4        | Not Used | 0       | RW     | Not Used  |
| 3          | gpio3_a  | 0       | RW     | 1=Put GPIO3 in analog mode; set this bit when used for an analog function e.g. the electrical frontend.<br>If set execute following I <sup>2</sup> C commands (otherwise an internal pulldown will be enabled) in this sequence:<br>Write 0x47 to register 0xC6<br>Write 0x0C to register 0xC2<br>Write 0x0C to register 0xC3 |
| 2          | gpio2_a  | 0       | RW     | 1=Put GPIO2 in analog mode<br>If set execute following I <sup>2</sup> C commands (otherwise an internal pulldown will be enabled) in this sequence:<br>Write 0x47 to register 0xC6<br>Write 0x0C to register 0xC2<br>Write 0x0C to register 0xC3  |
| 1          | gpio1_a  | 0       | RW     | 1=Put GPIO1 in analog mode  |
| 0          | gpio0_a  | 0       | RW     | 1=Put GPIO0 in analog mode  |

**GPIO\_E (Address 0x09)**

Figure 132:  
GPIO\_E Register

| Addr: 0x09 |          | GPIO_E  |        |                             |  |
|------------|----------|---------|--------|-----------------------------|--|
| Bit        | Bit Name | Default | Access | Bit Description             |  |
| 7:4        | Not Used | 0       | RW     | Not Used                    |  |
| 3          | gpio3_e  | 0       | RW     | GPIO3 output enabled if set |  |
| 2          | gpio2_e  | 0       | RW     | GPIO2 output enabled if set |  |
| 1          | gpio1_e  | 0       | RW     | GPIO1 output enabled if set |  |
| 0          | gpio0_e  | 0       | RW     | GPIO0 output enabled if set |  |

**GPIO\_O (Address 0x0a)**

Figure 133:  
GPIO\_O Register

| Addr: 0x0a |          | GPIO_O  |        |   |  |
|------------|----------|---------|--------|---|--|
| Bit        | Bit Name | Default | Access | Bit Description   |  |
| 7:4        | Not Used | 0       | RW     | Not Used  |  |
| 3          | gpio3_o  | 0       | RW     | If gpio3_e=1, gpio3_o defines the output state of GPIO3 |  |
| 2          | gpio2_o  | 0       | RW     | If gpio2_e=1, gpio2_o defines the output state of GPIO2 |  |
| 1          | gpio1_o  | 0       | RW     | If gpio1_e=1, gpio1_o defines the output state of GPIO1 |  |
| 0          | gpio0_o  | 0       | RW     | If gpio0_e=1, gpio0_o defines the output state of GPIO0 |  |

**GPIO\_I (Address 0x0b)**

Figure 134:  
GPIO\_I Register

| Addr: 0x0b |          | GPIO_I  |        |                 |  |
|------------|----------|---------|--------|-----------------|--|
| Bit        | Bit Name | Default | Access | Bit Description |  |
| 7:4        | Not Used | 0       | RO     | Not Used        |  |

| Addr: 0x0b |          | GPIO_I  |        |                                   |
|------------|----------|---------|--------|-----------------------------------|
| Bit        | Bit Name | Default | Access | Bit Description                   |
| 3          | gpio3_i  | 0       | RO     | The digital value sensed on GPIO3 |
| 2          | gpio2_i  | 0       | RO     | The digital value sensed on GPIO2 |
| 1          | gpio1_i  | 0       | RO     | The digital value sensed on GPIO1 |
| 0          | gpio0_i  | 0       | RO     | The digital value sensed on GPIO0 |

### GPIO\_P (Address 0x0c)

Figure 135:  
GPIO\_P Register

| Addr: 0x0c |          | GPIO_P  |        |  |
|------------|----------|---------|--------|--|
| Bit        | Bit Name | Default | Access | Bit Description  |
| 7          | gpio3_pd | 0       | RW     | GPIO3 pulldown configuration<br>0: No pulldown on GPIO3<br>1: Pulldown to GND on GPIO3 |
| 6          | gpio3_pu | 0       | RW     | GPIO3 pullup configuration<br>0: No pullup on GPIO3<br>1: Pullup to VDD on GPIO3       |
| 5          | gpio2_pd | 0       | RW     | GPIO2 pulldown configuration   |
| 4          | gpio2_pu | 0       | RW     | GPIO2 pullup configuration   |
| 3          | gpio1_pd | 0       | RW     | GPIO1 pulldown configuration   |
| 2          | gpio1_pu | 0       | RW     | GPIO1 pullup configuration   |
| 1          | gpio0_pd | 0       | RW     | GPIO0 pulldown configuration   |
| 0          | gpio0_pu | 0       | RW     | GPIO0 pullup configuration   |

### GPIO\_SR (Address 0x0d)

Figure 136:  
GPIO\_SR Register

| Addr: 0x0c |          | GPIO_SR |        |                 |
|------------|----------|---------|--------|-----------------|
| Bit        | Bit Name | Default | Access | Bit Description |
| 7:4        | Not Used | 0       | RW     | Not Used        |

| Addr: 0x0c |          | GPIO_SR |        |   |
|------------|----------|---------|--------|---|
| Bit        | Bit Name | Default | Access | Bit Description   |
| 3          | gpio3_sr | 0       | RW     | GPIO3 slew rate configuration<br>0: Default slew rate<br>1: Increased slew rate |
| 2          | gpio2_sr | 0       | RW     | GPIO2 slew rate configuration   |
| 1          | gpio1_sr | 0       | RW     | GPIO1 slew rate configuration   |
| 0          | gpio0_sr | 0       | RW     | GPIO0 slew rate configuration   |

### SUBID (Address 0x91)

Figure 137:  
SUBID Register

| Addr: 0x91 |          | SUBID   |        |  |
|------------|----------|---------|--------|--|
| Bit        | Bit Name | Default | Access | Bit Description  |
| 7:3        | subid    | NA      | RO     | Defines product version. Do not rely on bits defined as 'X'.<br>1XXXXb               |
| 2:0        | Revision | NA      | RO     | Reserved. Do no use and do not rely that the content stays the same for each device. |

### ID (Address 0x92)

Figure 138:  
ID Register

| Addr: 0x92 |             | ID      |        |   |       |         |        |          |
|------------|-------------|---------|--------|---|-------|---------|--------|----------|
| Bit        | Bit Name    | Default | Access | Bit Description   |       |         |        |          |
| 7:2        | id          | 0       | RO     | Part Number Identification.   |       |         |        |          |
|            |             |         |        | <table border="1"> <thead> <tr> <th>Value</th> <th>Meaning</th> </tr> </thead> <tbody> <tr> <td>110011</td> <td>AS7026GG</td> </tr> </tbody> </table> | Value | Meaning | 110011 | AS7026GG |
| Value      | Meaning     |         |        |   |       |         |        |          |
| 110011     | AS7026GG    |         |        |   |       |         |        |          |
| 1:0        | id_reserved | 0       | RO     | Reserved. Do no use and do not rely that the content stays the same for each device   |       |         |        |          |

**STATUS (Address 0xa0)**

**Figure 139:**  
STATUS Register

| Addr: 0xa0 |                    | STATUS  |         |   |
|------------|--------------------|---------|---------|---|
| Bit        | Bit Name           | Default | Access  | Bit Description   |
| 7          | irq_led_supply_low | 0       | R_PUSH1 | Check LEDSTATUS   |
| 6          | irq_clipdetect     | 0       | R_PUSH1 | Check CLIPSTATUS  |
| 5          | irq_fifooverflow   | 0       | R_PUSH1 | FIFO overflow (error condition, new data is lost)                     |
| 4          | irq_fifothreshold  | 0       | R_PUSH1 | FIFO is almost full (as defined in fifo_threshold, usually 3/4)       |
| 3          | irq_adc_threshold  | 0       | R_PUSH1 | The ADC value was above the programmed adc_threshold register setting |
| 2          | irq_ltf            | 0       | R_PUSH1 | LTF measurement is done. check LTFSTATUS (or ignore it)               |
| 1          | irq_sequencer      | 0       | R_PUSH1 | All configured sequencer iterations have finished                     |
| 0          | irq_adc            | 0       | R_PUSH1 | ADC has finished  |

The STATUS register shows the current state of the interface. Some bits in here can trigger an interrupt.

An asserted bit can be cleared by writing a '1' to it - in case of irq\_led\_supply\_low and irq\_clipdetect, this also clears the underlying condition in the CLIPSTATUS and LEDSTATUS registers.

The FIFO threshold interrupt cannot be cleared directly, but only by lowering the FIFO level. The FIFO overflow interrupt is sticky and must be cleared explicitly.

**CLIPSTATUS (Address 0xa1)**

**Figure 140:**  
CLIPSTATUS Register

| Addr: 0xa1 |                 | CLIPSTATUS |        |   |
|------------|-----------------|------------|--------|---|
| Bit        | Bit Name        | Default    | Access | Bit Description   |
| 7:4        | Not used        | 0          | RO     | Not Used  |
| 3          | pd_clipdetect_l |            |        | If this bit is asserted, photo diode amplifier has been below the lower threshold |

| Addr: 0xa1 |                 | CLIPSTATUS |        |   |
|------------|-----------------|------------|--------|---|
| Bit        | Bit Name        | Default    | Access | Bit Description   |
| 2          | pd_clipdetect_h |            |        | If this bit is asserted, photo diode amplifier has been above the upper threshold |
| 1          | sd_clipdetect_l |            |        | If this bit is asserted, photo diode amplifier has been below the lower threshold |
| 0          | sd_clipdetect_h |            |        | If this bit is asserted, photo diode amplifier has been above the upper threshold |

### LEDSTATUS (Address 0xa2)

Figure 141:  
LEDSTATUS Register

| Addr: 0xa2 |                 | LEDSTATUS |        |  |
|------------|-----------------|-----------|--------|--|
| Bit        | Bit Name        | Default   | Access | Bit Description  |
| 7:4        | Not used        | 0         | RO     | Not Used   |
| 3          | led4_supply_low | 0         | RO     | If this bit is asserted, LED4 voltage has been too low |
| 2          | led3_supply_low | 0         | RO     | If this bit is asserted, LED3 voltage has been too low |
| 1          | led2_supply_low | 0         | RO     | If this bit is asserted, LED3 voltage has been too low |
| 0          | led1_supply_low | 0         | RO     | If this bit is asserted, LED1 voltage has been too low |

### INTENAB (Address 0xa8)

Figure 142:  
INTENAB Register

| Addr: 0xa8 |                         | INTENAB |        |                                       |
|------------|-------------------------|---------|--------|---------------------------------------|
| Bit        | Bit Name                | Default | Access | Bit Description                       |
| 7          | irq_led_supply_low_enab | 0       | RW     | 1 ... Enable led supply low interrupt |
| 6          | irq_clipdetect_enab     | 0       | RW     | 1 ... Enable clipdetect interrupt     |
| 5          | irq_fifooverflow_ena    | 0       | RW     | 1 ... Enable fifooverflow interrupt   |

| Addr: 0xa8 |                        | INTENAB |        |   |
|------------|------------------------|---------|--------|---|
| Bit        | Bit Name               | Default | Access | Bit Description                                       |
| 4          | irq_fifothreshold_enab | 0       | RW     | 1 ... Enable fifothreshold interrupt                  |
| 3          | irq_adc_threshold_enab | 0       | RW     | 1 ... Enable irq_adc_threshold as an interrupt source |
| 2          | irq_ltf_enab           | 0       | RW     | 1 ... Enable LTF as an interrupt source               |
| 1          | irq_sequencer_enab     | 0       | RW     | 1 ... Enable irq_sequencer as an interrupt source     |
| 0          | irq_adc_enab           | 0       | RW     | 1 ... Enable irq_adc as an interrupt source           |

Each of the STATUS register bits can cause an interrupt (register INTR) if the respective bit is asserted in the INTENAB register

### INTR (Address 0xa9)

Figure 143:  
INTR Register

| Addr: 0xa9 |                         | INTR    |        |                 |
|------------|-------------------------|---------|--------|-----------------|
| Bit        | Bit Name                | Default | Access | Bit Description |
| 7          | irq_led_supply_low_intr | 0       | RO     |                 |
| 6          | irq_clipdetect_intr     | 0       | RO     |                 |
| 5          | irq_fifooverflow_intr   | 0       | RO     |                 |
| 4          | irq_fifothreshold_intr  | 0       | RO     |                 |
| 3          | irq_adc_threshold_intr  | 0       | RO     |                 |
| 2          | irq_ltf_intr            | 0       | RO     |                 |
| 1          | irq_sequencer_intr      | 0       | RO     |                 |
| 0          | irq_adc_intr            | 0       | RO     |                 |

The INTR registers shows the bit or bits that are responsible for an asserted interrupt. Effectively, these bits are OR-ed together to drive the interrupt pin INT low (open drain output).



# 8 Application Information

## 8.1 Application Examples

The following figure shows the complete integration of the AS7026GG in a mobile optical measurement system for HRM, SpO<sub>2</sub>, GSR (galvanic skin resistivity) and skin temperature using an NTC.


The device can be powered directly by a Li-ion battery as it has its own power management. Nevertheless the I<sup>2</sup>C interface can be powered by 1.8 V circuitry.



### Information


AS7026GG can be used in the same configuration for e.g. a fitness band or a smart watch.

**Figure 144:**  
AS7026GG Optical HRM Measurement System for Wrist Based Application

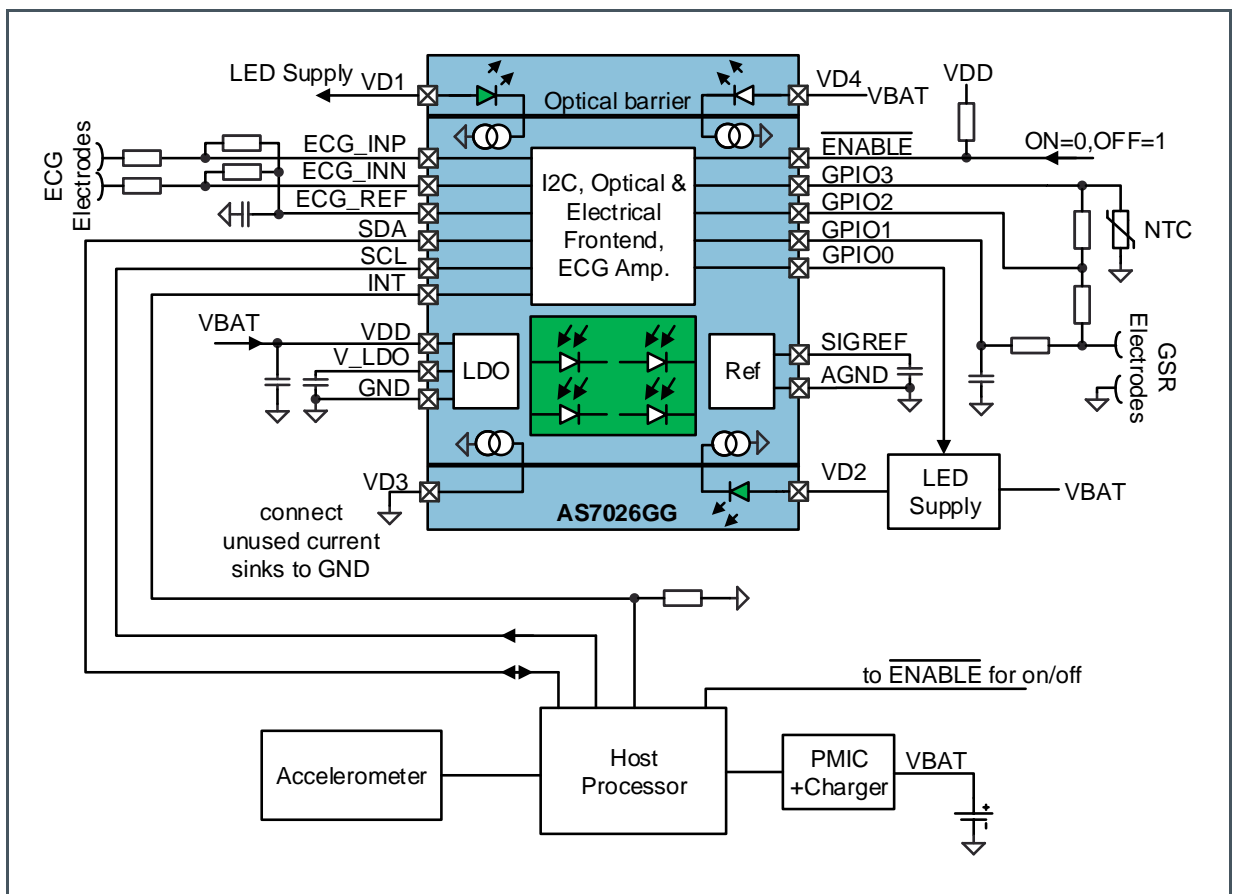

# 9 Package Drawings & Markings

Figure 145:  
AS7026GG Package Outline Drawing

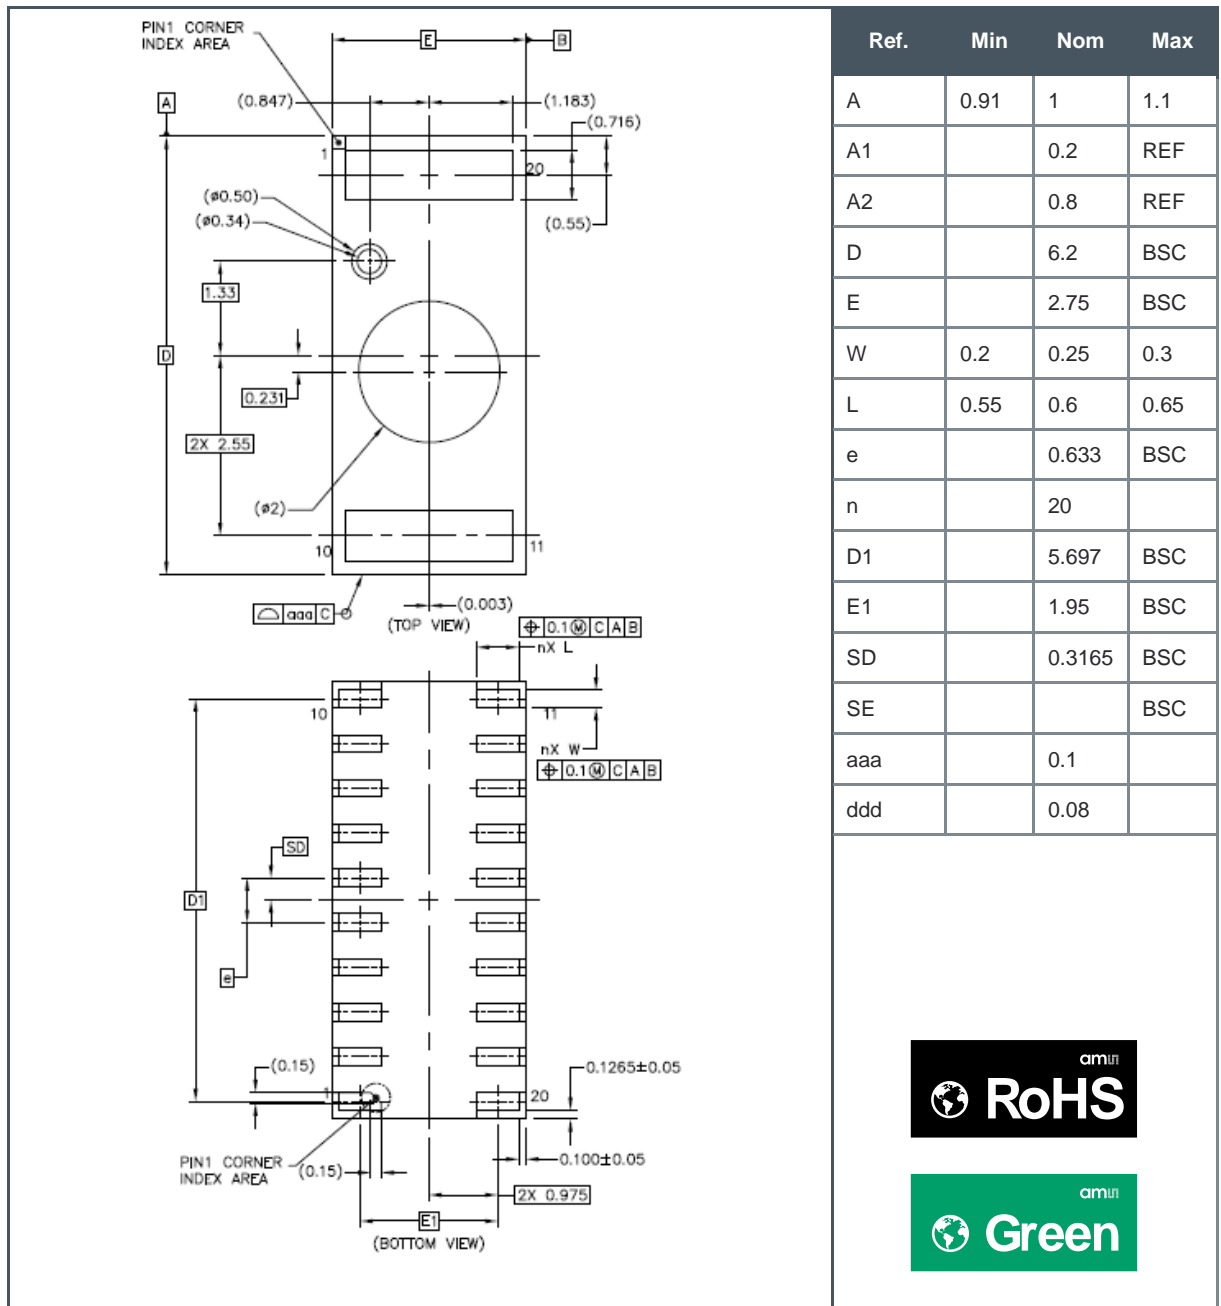


- (1) All dimensions are in millimeters. Angles in degrees.
- (2) Dimensioning and tolerancing conform to ASME Y14.5M-1994.
- (3) n is the total number of terminals.
- (4) This package contains no lead (Pb).
- (5) This drawing is subject to change without notice.





Figure 147:  
AS7026GG Reel Dimensions

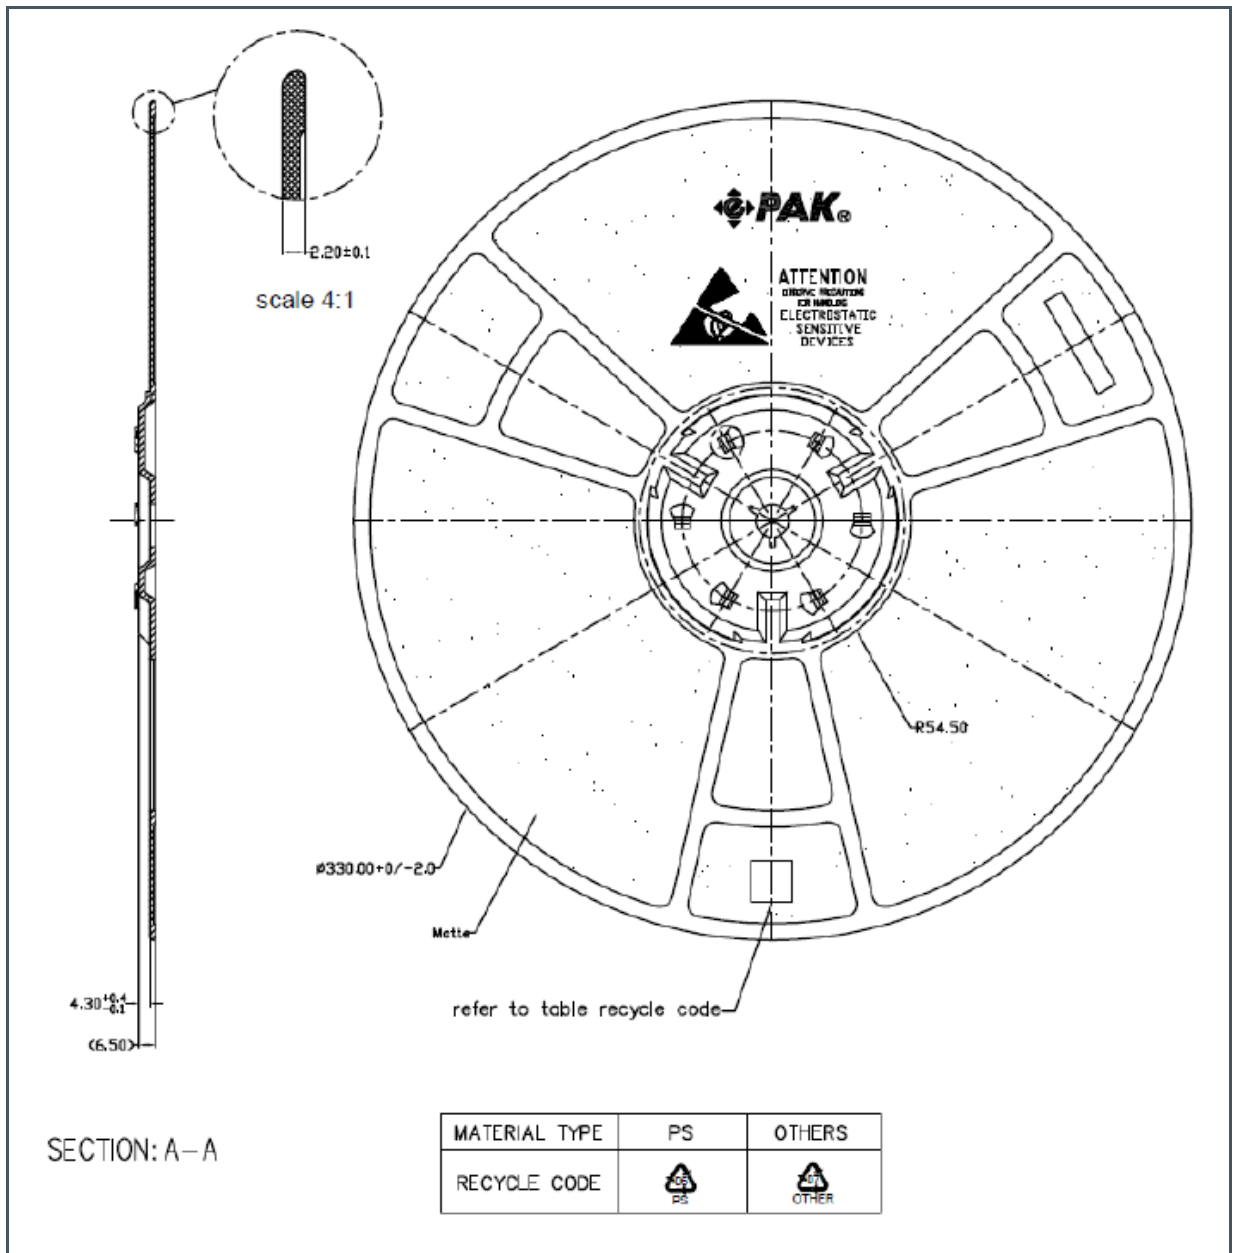

- (1) All dimensions are in millimeters. Angles in degrees.
- (2) This drawing is subject to change without notice.

# 11 Soldering & Storage Information

Figure 148:  
Solder Reflow Profile Graph

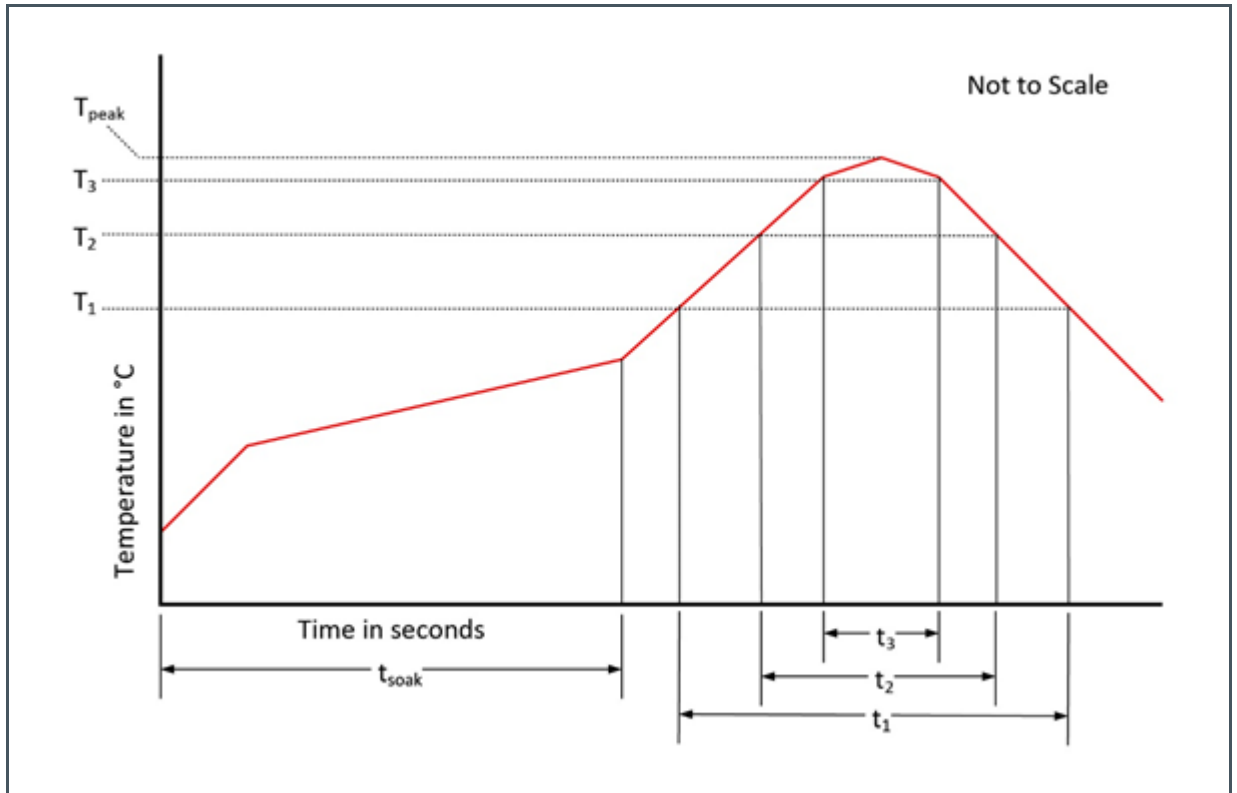


Figure 149:  
Solder Reflow Profile

| Parameter                                  | Reference  | Device         |
|--|------------|----------------|
| Average temperature gradient in preheating |            | 2.5 °C/s       |
| Soak time                                  | $t_{soak}$ | 2 to 3 minutes |
| Time above 217 °C ( $T_1$ )                | $t_1$      | Max 60 s       |
| Time above 230 °C ( $T_2$ )                | $t_2$      | Max 50 s       |
| Time above $T_{peak} - 10$ °C ( $T_3$ )    | $t_3$      | Max 10 s       |
| Peak temperature in reflow                 | $T_{peak}$ | 260 °C         |
| Temperature gradient in cooling            |            | Max -5 °C/s    |

## 12 Revision Information

| Document Status          | Product Status  | Definition   |
|--------------------------|-----------------|--|
| Product Preview          | Pre-Development | Information in this datasheet is based on product ideas in the planning phase of development. All specifications are design goals without any warranty and are subject to change without notice  |
| Preliminary Datasheet    | Pre-Production  | Information in this datasheet is based on products in the design, validation or qualification phase of development. The performance and parameters shown in this document are preliminary without any warranty and are subject to change without notice            |
| Datasheet                | Production      | Information in this datasheet is based on products in ramp-up to full production or full production which conform to specifications in accordance with the terms of ams AG standard warranty as given in the General Terms of Trade                                |
| Datasheet (discontinued) | Discontinued    | Information in this datasheet is based on products which conform to specifications in accordance with the terms of ams AG standard warranty as given in the General Terms of Trade, but these products have been superseded and should not be used for new designs |

| Changes from previous version to current revision v3-00 | Page    |
|---|---------|
| Remove LED wavelength at 590 nm                         | 12      |
| Added Tape & Reel information                           | 107-108 |
| Added Soldering & Storage Information                   | 109     |

- Page and figure numbers for the previous version may differ from page and figure numbers in the current revision.
- Correction of typographical errors is not explicitly mentioned.

# 13 Legal Information

## Copyrights & Disclaimer

Copyright ams AG, Tobelbader Strasse 30, 8141 Premstaetten, Austria-Europe. Trademarks Registered. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

Devices sold by ams AG are covered by the warranty and patent indemnification provisions appearing in its General Terms of Trade. ams AG makes no warranty, express, statutory, implied, or by description regarding the information set forth herein. ams AG reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with ams AG for current information. This product is intended for use in commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by ams AG for each application. This product is provided by ams AG "AS IS" and any express or implied warranties, including, but not limited to the implied warranties of merchantability and fitness for a particular purpose are disclaimed.

ams AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of ams AG rendering of technical or other services.

## RoHS Compliant & ams Green Statement

**RoHS Compliant:** The term RoHS compliant means that ams AG products fully comply with current RoHS directives. Our semiconductor products do not contain any chemicals for all 6 substance categories plus additional 4 substance categories (per amendment EU 2015/863), including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, RoHS compliant products are suitable for use in specified lead-free processes.

**ams Green (RoHS compliant and no Sb/Br/Cl):** ams Green defines that in addition to RoHS compliance, our products are free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material) and do not contain Chlorine (Cl not exceed 0.1% by weight in homogeneous material).

**Important Information:** The information provided in this statement represents ams AG knowledge and belief as of the date that it is provided. ams AG bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. ams AG has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. ams AG and ams AG suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

## Headquarters

ams AG  
Tobelbader Strasse 30  
8141 Premstaetten  
Austria, Europe  
Tel: +43 (0) 3136 500 0

Please visit our website at [www.ams.com](http://www.ams.com)

Buy our products or get free samples online at [www.ams.com/Products](http://www.ams.com/Products)

Technical Support is available at [www.ams.com/Technical-Support](http://www.ams.com/Technical-Support)

Provide feedback about this document at [www.ams.com/Document-Feedback](http://www.ams.com/Document-Feedback)

For sales offices, distributors and representatives go to [www.ams.com/Contact](http://www.ams.com/Contact)

For further information and requests, e-mail us at [ams\\_sales@ams.com](mailto:ams_sales@ams.com)