

Smart Fiber Amplifier Unit E3X-HD

CSM_E3X-HD_DS_E_2_1



Easy and optimum settings for anyone Smart Fiber Amplifier Unit with Long-term Stable Detection

- Equipped with Smart Tuning, which automatically configures the settings to their optimum values with the press of a single button.
- Highly usable design enables anyone to configure the settings easily.
- Detects dirt, vibrations, and LED deterioration, and automatically compensates the incident level and the light intensity.
- Unparalleled best-in-class power provides stable detections for low-reflective workpieces and large workpieces (equipped with GIGA RAY II).

⚠ Refer to the *Fiber Sensors Technical Guide and Safety Precautions* on page 9.



For the most recent information on models that have been certified for safety standards, refer to your OMRON website.

Features

Easy

Greater operability and visibility are realized by a universal design

Operations

Symbolic buttons are easy to remember anywhere even for operators overseas.



Compatibility for easy operation and incorrect operation prevention.




Pleasant operation even with gloves on.



Arc Design
A strong accent line gives a compact look to improve equipment design

Indications

Visibility is improved with digital displays and visible indicators. New Concept: Visible Indicators

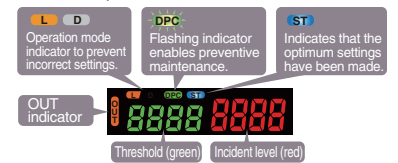


Smart Tuning

Smart tuning for the optimum settings with just one button.

Smart Tuning

Automatically configure the settings to their optimum values with the press of a single button.

With workpiece Without workpiece


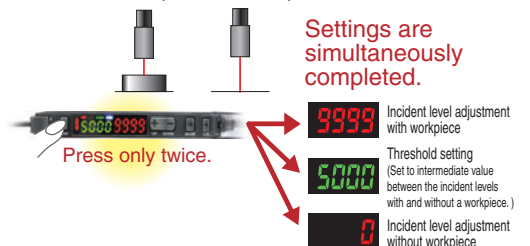


Stable

Long-term stable detection with no maintenance

Smart Power Control




Maintenance-free operation by double compensation of light intensity and incident level

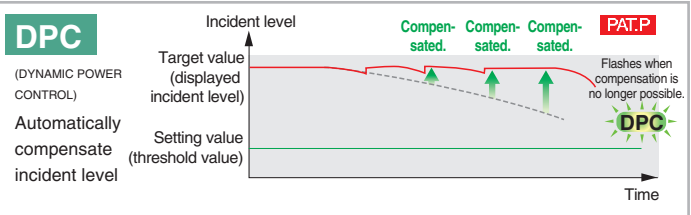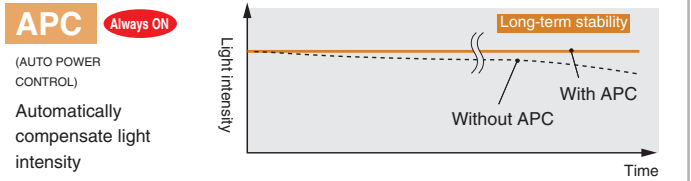


Ordering Information

Fiber Amplifier Units

Standard models (Dimensions → page 12)

| Appearance | Connecting method | Models | |
|---|-----------------------|-------------|-------------|
| | | NPN output | PNP output |
|  | Pre-wired (2 m) | E3X-HD11 2M | E3X-HD41 2M |
|  | Wire-saving Connector | E3X-HD6 | E3X-HD8 |
|  | M8 Connector | E3X-HD14 | E3X-HD44 |



Model for Sensor Communications Unit (Dimensions → page 12)

| Appearance | Model | Applicable Sensor Communications Unit |
|---|---------|---------------------------------------|
|  | E3X-HD0 | E3X-ECT E3X-CRT |

Accessories (sold separately)



Wire-saving connectors (Required for models for Wire-saving Connectors.)

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately. * Protective stickers: provided.

| Type | Appearance | Cable length | Number of conductors | Models |
|------------------|---|--------------|----------------------|----------|
| Master Connector |  | 2 m | 3 | E3X-CN11 |
| Slave Connector |  | | 1 | E3X-CN12 |


Sensor I/O Connectors (Required for models with M8 Connectors.)

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately.

| Size | Cable | Appearance | Cable type | Models | |
|------|----------|--|------------|--------|-----------------|
| M8 | Standard | Straight  | 2 m | 4-wire | XS3F-M421-402-A |
| | | | 5 m | | XS3F-M421-405-A |
| | | L-shaped  | 2 m | | XS3F-M422-402-A |
| | | | 5 m | | XS3F-M422-405-A |


Mounting Bracket

A Mounting Bracket is not provided with the Fiber Amplifier Unit and must be ordered separately as required.

| Appearance | Model | Quantity |
|---|----------|----------|
|  | E39-L143 | 1 |


DIN Track

A Din Track is not provided with the Fiber Amplifier Unit and must be ordered separately as required.

| Appearance | Type | Models | Quantity |
|---|-----------------------------------|-----------|----------|
|  | Shallow type, total length: 1 m | PFP-100N | 1 |
| | Shallow type, total length: 0.5 m | PFP-50N | |
| | Deep type, total length: 1 m | PFP-100N2 | |

End Plate

Two End Plates are provided with the Sensor Communications Unit. End Plates are not provided with the Fiber Amplifier Unit and must be ordered separately as required.

| Appearance | Model | Quantity |
|---|-------|----------|
|  | PFP-M | 1 |

Ratings and Specifications

| Item | Type | Standard | | | Model for Sensor Communications Unit *1 |
|---|---------------------------------------|--|-------------------------------|-------------------------------|---|
| | NPN output | E3X-HD11 | E3X-HD6 | E3X-HD14 | E3X-HD0 |
| | PNP output | E3X-HD41 | E3X-HD8 | E3X-HD44 | |
| | Connecting method | Pre-wired | Wire-saving Connector *2 | M8 Connector | Connector for Sensor Communications Unit |
| Light source (wavelength) | | Red, 4-element LED (625 nm) | | | |
| Power supply voltage | | 12 to 24 VDC ±10%, ripple (P-P) 10% max. | | | |
| Power consumption | | Normal mode: 720 mW max. (Current consumption: 30 mA max. at 24 VDC, 60 mA max. at 12 VDC) Power saving Eco mode: 530 mW max. (Current consumption: 22 mA max. at 24 VDC, 44 mA max. at 12 VDC) | | | |
| Control output | | Load power supply voltage: 26.4 VDC max., open-collector output (Differs for NPN and PNP outputs.) Load current: 50 mA max. (residual voltage: 2 V max.), OFF current: 0.5 mA max. | | | – |
| Protection circuits | | Power supply reverse polarity protection, output short-circuit protection and output reverse polarity protection | | | Power supply reverse polarity protection and output short-circuit protection |
| Response time | Super-high-speed mode (SHS) *3 | NPN outputs: Operate or reset: 50 μs PNP outputs: Operate or reset: 55 μs | | | – |
| | High-speed mode (HS) | Operate or reset: 250 μs (default setting) | | | |
| | Standard mode (Std) | Operate or reset: 1 ms | | | |
| | Giga-power mode (GIGA) | Operate or reset: 16 ms | | | |
| Mutual interference prevention | | Possible for up to 10 units (optical communications sync) *3 | | | |
| Auto power control (APC) | | Always ON | | | |
| Other functions | | Power tuning, differential detection, DPC, timer (OFF-delay, ON-delay, or one-shot), zero reset, resetting settings, and Eco mode | | | |
| Ambient illumination (Receiver side) | | Incandescent lamp: 20,000 lx max., Sunlight: 30,000 lx max. | | | |
| Maximum connectable Units | | 16 units | | | with E3X-CRT: 16 units with E3X-ECT: 30 units |
| Ambient temperature range | | Operating: Groups of 1 to 2 Amplifiers: –25 to 55°C, Groups of 3 to 10 Amplifiers: –25 to 50°C, Groups of 11 to 16 Amplifiers: –25 to 45°C Storage: –30 to 70°C (with no icing or condensation) | | | Operating: Groups of 1 to 2 Amplifiers: 0 to 55°C, Groups of 3 to 10 Amplifiers: 0 to 50°C, Groups of 11 to 16 Amplifiers: 0 to 45°C, Groups of 17 to 30 Amplifiers: 0 to 40°C Storage: –30 to 70°C (with no icing or condensation) |
| Ambient humidity range | | Operating and storage: 35% to 85% (with no condensation) | | | |
| Insulation resistance | | 20 MΩ min. (at 500 VDC) | | | |
| Dielectric strength | | 1,000 VAC at 50/60 Hz for 1 minute | | | |
| Vibration resistance (destruction) | | 10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions | | | 10 to 150 Hz with a 0.7-mm double amplitude for 80 minutes each in X, Y, and Z directions |
| Shock resistance (destruction) | | 500 m/s ² for 3 times each in X, Y, and Z directions | | | 150 m/s ² for 3 times each in X, Y, and Z directions |
| Degree of protection | | IEC 60529 IP50 (with Protective Cover attached) | | | |
| Weight (packed state/unit only) | | Approx. 105 g/ Approx. 65 g | Approx. 60 g/ Approx. 20 g | Approx. 70 g/ Approx. 25 g | Approx. 65 g/Approx. 25 g |
| Materials | Case | Heat-resistant ABS | | | Heat-resistant ABS (connector: PBT) |
| | Cover | Polycarbonate (PC) | | | |
| Accessories | | Instruction Manual | | | |

*1. The E3X-ECT EtherCAT Sensor Communications Unit and the E3X-CRT CompoNet Sensor Communications Unit can be used.

*2. Use either the E3X-CN11 (master connector, 3 conductors) or the E3X-CN12 (slave connector, 1 conductor).

*3. The communications function and mutual interference prevention function are disabled when the detection mode is set to Super-high-speed mode (SHS).

When including E3X-DA-S with activated power tuning, mutual interference prevention is possible for up to 6 units.

When including E3X-MDA with activated power tuning, mutual interference prevention is possible for up to 5 units.

Sensing Distances

Threaded Models

| Sensing method | Sensing direction | Size | Model | Sensing distance (mm) | | | |
|----------------|-------------------|-------------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | Right-angle | M4 | E32-T11N 2M | 2,000 | 1,000 | 700 | 280 |
| | Straight | | E32-T11R 2M | | | | |
| | | | E32-LT11 2M | 4,000 * | 4,000 * | 2,700 | 1,080 |
| | | | E32-LT11R 2M | 4,000 * | 3,500 | 2,300 | 920 |
| Reflective | Right-angle | M3 | E32-C31N 2M | 110 | 50 | 46 | 14 |
| | | M6 | E32-C11N 2M | 780 | 350 | 320 | 100 |
| | Straight | M3 | E32-D21R 2M | 140 | 60 | 40 | 16 |
| | | | E32-C31 2M | 330 | 150 | 100 | 44 |
| | | E32-C31M 1M | | | | | |
| | | M4 | E32-D211R 2M | 140 | 60 | 40 | 16 |
| | | | E32-D11R 2M | 840 | 350 | 240 | 100 |
| | | | E32-CC200 2M | 1,400 | 600 | 400 | 180 |
| | E32-LD11 2M | | 860 | 360 | 250 | 110 | |
| | E32-LD11R 2M | 840 | 350 | 240 | 100 | | |

* The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

Cylindrical Models

| Sensing method | Size | Sensing direction | Model | Sensing distance (mm) | | | |
|---------------------|------------|-------------------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | 1 dia. | Top-view | E32-T223R 2M | 450 | 250 | 150 | 60 |
| | 1.5 dia. | | E32-T22B 2M | 680 | 400 | 220 | 90 |
| | 3 dia. | | E32-T12R 2M | 2,000 | 1,000 | 700 | 280 |
| | Reflective | 1.5 dia. | Side-view | E32-T14LR 2M | 750 | 450 | 260 |
| E32-D22B 2M | | | | 140 | 60 | 40 | 16 |
| 1.5 dia. + 0.5 dia. | | Top-view | E32-D43M 1M | 28 | 12 | 8 | 4 |
| | | | E32-D22R 2M | 140 | 60 | 40 | 16 |
| E32-D221B 2M | | | 300 | 140 | 90 | 40 | |
| E32-D32L 2M | | | 700 | 300 | 200 | 90 | |
| 3 dia. + 0.8 dia. | | | E32-D33 2M | 70 | 30 | 20 | 8 |

Flat Models

| Sensing method | Sensing direction | Model | Sensing distance (mm) | | | |
|----------------|-------------------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | Top-view | E32-T15XR 2M | 2,000 | 1,000 | 700 | 280 |
| | Side-view | E32-T15YR 2M | 750 | 450 | 260 | 100 |
| | Flat-view | E32-T15ZR 2M | | | | |
| Reflective | Top-view | E32-D15XR 2M | 840 | 350 | 240 | 100 |
| | Side-view | E32-D15YR 2M | 200 | 100 | 52 | 24 |
| | Flat-view | E32-D15ZR 2M | | | | |

Sleeve Models

| Sensing method | Sensing direction | Model | Sensing distance (mm) | | | |
|----------------|-------------------|-----------------|-----------------------|---------------|-----------------|-----------------------|
| | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | Side-view | E32-T24R 2M | 170 | 100 | 50 | 20 |
| | | E32-T24E 2M | 450 | 250 | 150 | 60 |
| | Top-view | E32-T33 1M | 150 | 90 | 50 | 20 |
| | | E32-T21-S1 2M | 510 | 300 | 170 | 68 |
| | | E32-TC200BR 2M | 2,000 | 1,000 | 700 | 280 |
| Reflective | Side-view | E32-D24R 2M | 70 | 30 | 20 | 8 |
| | | E32-D24-S2 2M | 120 | 53 | 45 | 14 |
| | | E32-D43M 1M | 28 | 12 | 8 | 4 |
| | Top-view | E32-D331 2M | 14 | 6 | 4 | 2 |
| | | E32-D33 2M | 70 | 30 | 20 | 8 |
| | | E32-D32-S1 0.5M | 63 | 27 | 18 | 7 |
| | | E32-D31-S1 0.5M | | | | |
| | | E32-DC200F4R 2M | 140 | 60 | 40 | 16 |
| | | E32-D22-S1 2M | 250 | 110 | 72 | 30 |
| | | E32-D21-S3 2M | | | | |
| | | E32-DC200BR 2M | 840 | 350 | 240 | 100 |
| | | E32-D25-S3 2M | 250 | 110 | 72 | 30 |

Small-spot, Reflective Models

| Type | Spot diameter | Center distance (mm) | Model | Sensing distance (mm) | | | |
|-----------------|---------------------|----------------------|---------------------------------|--|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Variable spot | 0.1 to 0.6 dia. | 6 to 15 | E32-C42 1M+E39-F3A | Spot diameter of 0.1 to 0.6 mm at 6 to 15 mm. | | | |
| | 0.3 to 1.6 dia. | 10 to 30 | E32-C42 1M+E39-F17 | Spot diameter of 0.3 to 1.6 mm at 10 to 30 mm. | | | |
| Parallel light | 4 dia. | 0 to 20 | E32-C31 2M+E39-F3C | Spot diameter of 4 mm max. at 0 to 20 mm. | | | |
| | | | E32-C31N 2M+E39-F3C | | | | |
| Integrated lens | 0.1 dia. | 5 | E32-C42S 1M | Spot diameter of 0.1 mm at 5 mm. | | | |
| | 6 dia. | 50 | E32-L15 2M | Spot diameter of 6 mm at 50 mm. | | | |
| Small-spot | 0.1 dia. | 7 | E32-C41 1M+E39-F3A-5 | Spot diameter of 0.1 mm at 7 mm. | | | |
| | | | E32-C31 2M+E39-F3A-5 | Spot diameter of 0.5 mm at 7 mm. | | | |
| | 0.5 dia. | 17 | E32-C31N 2M+E39-F3A-5 | | | | |
| | 0.2 dia. | | E32-C41 1M+E39-F3B | Spot diameter of 0.2 mm at 17 mm. | | | |
| | | 0.5 dia. | E32-C31 2M+E39-F3B | Spot diameter of 0.5 mm at 17 mm. | | | |
| | E32-C31N 2M+E39-F3B | | | | | | |
| 3 dia. | 50 | E32-CC200 2M+E39-F18 | Spot diameter of 3 mm at 50 mm. | | | | |
| | | E32-C11N 2M+E39-F18 | | | | | |

High-power Beam Models

| Type | Sensing direction | Aperture angle | Model | Sensing distance (mm) | | | |
|--|-------------------|----------------------|-----------------------|-----------------------|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam models with integrated lens | Top-view | 10° | E32-T17L 10M | 20,000 *1 | 20,000 *1 | 20,000 *1 | 8,000 |
| | | 15° | E32-LT11 2M | 4,000 *2 | 4,000 *2 | 2,700 | 1,080 |
| | Side-view | 30° | E32-LT11R 2M | 4,000 *2 | 3,500 | 2,300 | 920 |
| Through-beam models with lenses | Right-angle | 12° | E32-T11N 2M+E39-F1 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 2,000 |
| | | 6° | E32-T11N 2M+E39-F16 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 3,600 |
| | Top-view | 12° | E32-T11R 2M+E39-F1 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 2,000 |
| | | 6° | E32-T11R 2M+E39-F16 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 3,600 |
| | Side-view | 60° | E32-T11R 2M+E39-F2 | 1,450 | 800 | 500 | 200 |
| | Top-view | 12° | E32-T11 2M+E39-F1 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 1,860 |
| | | 6° | E32-T11 2M+E39-F16 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 4,000 *2 |
| | Side-view | 60° | E32-T11 2M+E39-F2 | 2,300 | 1,320 | 860 | 320 |
| | Top-view | 12° | E32-T51R 2M+E39-F1 | 4,000 *2 | 4,000 *2 | 3,900 | 1,500 |
| | | 6° | E32-T51R 2M+E39-F16 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 4,000 *2 |
| | Side-view | 60° | E32-T51R 2M+E39-F2 | 1,400 | 720 | 500 | 200 |
| | Top-view | 12° | E32-T81R-S 2M+E39-F1 | 4,000 *2 | 4,000 *2 | 2,700 | 1,000 |
| | | 6° | E32-T81R-S 2M+E39-F16 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 1,800 |
| | Side-view | 60° | E32-T81R-S 2M+E39-F2 | 1,000 | 550 | 360 | 140 |
| | Top-view | 12° | E32-T61-S 2M+E39-F1 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 1,800 |
| 6° | | E32-T61-S 2M+E39-F16 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 3,100 | |
| Side-view | 60° | E32-T61-S 2M+E39-F2 | 1,680 | 900 | 600 | 240 | |
| Top-view | 12° | E32-T51 2M+E39-F1-33 | 4,000 *2 | 4,000 *2 | 2,300 | 1,400 | |
| | 6° | E32-T51 2M+E39-F16 | 4,000 *2 | 4,000 *2 | 4,000 *2 | 4,000 *2 | |
| Reflective models with integrated lens | Top-view | 4° | E32-D16 2M | 40 to 2,800 | 40 to 1,400 | 40 to 900 | 40 to 480 |

*1. The fiber length is 10 m on each side, so the sensing distance is given as 20,000 mm.

*2. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

Narrow View Models

| Sensing method | Sensing direction | Aperture angle | Model | Sensing distance (mm) | | | |
|----------------|-------------------|----------------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | Side-view | 1.5° | E32-A03 2M | 3,220 | 1,780 | 1,200 | 500 |
| | | | E32-A03-1 2M | | | | |
| | | 3.4° | E32-A04 2M | 1,280 | 680 | 450 | 200 |
| | | 4° | E32-T24SR 2M | 4,000 * | 2,200 | 1,460 | 580 |
| | | | E32-T24S 2M | 4,000 * | 2,600 | 1,740 | 700 |
| | | E32-T22S 2M | 4,000 * | 3,800 | 2,500 | 1,000 | |

* The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

Models for Detection without Background Interference

| Sensing method | Sensing direction | Model | Sensing distance (mm) | | | |
|--------------------|-------------------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Limited-reflective | Flat-view | E32-L16-N 2M | 0 to 15 | | | 0 to 12 |
| | | E32-L24S 2M | 0 to 4 | | | |
| | Side-view | E32-L25L 2M | 5.4 to 9 (center 7.2) | | | |

Transparent Object Detection (Retro-reflective Models)

| Sensing method | Feature | Size | Model | Sensing distance (mm) | | | |
|------------------|----------------|------|-------------------------------------|-----------------------|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Retro-reflective | Film detection | M3 | E32-C31 2M +E39-F3R +E39-RP37 | 250 | | 200 | --- |
| | Square | --- | E32-R16 5M | 150 to 1,500 | | | |
| | Threaded | M6 | E32-R21 2M | 10 to 250 | | | |

Transparent Object Detection (Limited-reflective Models)

| Sensing method | Feature | Sensing direction | Model | Sensing distance (mm) | | | |
|--------------------|---------------------------------|-------------------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Limited-reflective | Small size | Flat-view | E32-L24S 2M | 0 to 4 | | | |
| | Standard | | E32-L16-N 2M | 0 to 15 | | | 0 to 12 |
| | Glass substrate alignment, 70°C | | E32-A08 2M | 10 to 20 | | --- | |
| | Standard/long-distance | | E32-A12 2M | 12 to 30 | | --- | |
| | Side-view form | Side-view | E32-L25L 2M | 5.4 to 9 (center 7.2) | | | |
| | Glass substrate mapping, 70°C | Top-view | E32-A09 2M | 15 to 38 | | | --- |

Chemical-resistant, Oil-resistant Models

| Sensing method | Type | Sensing direction | Model | Sensing distance (mm) | | | |
|----------------|---|-------------------|--------------|--|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | Oil-resistant | Right-angle | E32-T11NF 2M | 4,000 *1 | 4,000 *1 | 4,000 *1 | 2,200 |
| | Chemical/oil-resistant | Top-view | E32-T12F 2M | 4,000 *1 | 4,000 *1 | 4,000 *1 | 1,600 |
| | | Side-view | E32-T11F 2M | 4,000 *1 | 4,000 *1 | 2,600 | 1,000 |
| | | | | E32-T14F 2M | 1,400 | 800 | 500 |
| | Chemical/oil-resistant at 150°C | Top-view | E32-T51F 2M | 4,000 *1 | 2,800 | 1,800 | 700 |
| Reflective | Semiconductors: Cleaning, developing, and etching; 60°C | Top-view | E32-L11FP 5M | 8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm), 19 to 31 mm from center of mounting hole A (Recommended sensing distance: 22 mm) | | | |
| | Semiconductors: Resist stripping; 85°C | | E32-L11FS 5M | 8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm), 32 to 44 mm from center of mounting hole A (Recommended sensing distance: 35 mm) | | | |
| | Chemical/oil-resistant | | E32-D12F 2M | --- | 190 | 130 | 60 |
| | Chemical-resistant cable | | E32-D11U 2M | 840 | 350 | 240 | 100 |

*1. The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

*2. Even if there is no sensing object, the Sensor will detect light that is reflected by the fluorescein.

Bending-resistant Models

| Sensing method | Size | Model | Sensing distance (mm) | | | |
|----------------|----------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | 1.5 dia. | E32-T22B 2M | 680 | 400 | 220 | 90 |
| | M3 | E32-T21 2M | | | | |
| | M4 | E32-T11 2M | 2,500 | 1,350 | 900 | 360 |
| | Square | E32-T25XB 2M | 500 | 300 | 170 | 70 |
| Reflective | 1.5 dia. | E32-D22B 2M | 140 | 60 | 40 | 16 |
| | M3 | E32-D21 2M | | | | |
| | 3 dia. | E32-D221B 2M | 300 | 140 | 90 | 40 |
| | M4 | E32-D21B 2M | | | | |
| | M6 | E32-D11 2M | 840 | 350 | 240 | 100 |
| | Square | E32-D25XB 2M | 240 | 100 | 60 | 30 |

Heat-resistant Models

| Sensing method | Size | Model | Sensing distance (mm) | | | | |
|----------------|-------|---------------|-----------------------|---------------|-----------------|-----------------------|-----|
| | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode | |
| Through-beam | 100°C | E32-T51R 2M | 1,600 | 800 | 560 | 225 | |
| | 150°C | E32-T51 2M | 2,800 | 1,500 | 1,000 | 400 | |
| | 200°C | E32-T81R-S 2M | 1,000 | 550 | 360 | 140 | |
| | 350°C | E32-T61-S 2M | 1,680 | 900 | 600 | 240 | |
| Reflective | 100°C | E32-D51R 2M | 670 | 280 | 190 | 80 | |
| | 150°C | E32-D51 2M | 1,120 | 450 | 320 | 144 | |
| | 200°C | E32-D81R-S 2M | 420 | 180 | 120 | 54 | |
| | 300°C | E32-A08H2 2M | 10 to 20 | | | | --- |
| | | E32-A09H2 2M | 20 to 30 (center 25) | | | | --- |
| | 350°C | E32-D611-S 2M | 420 | 180 | 120 | 54 | |
| | | E32-D61-S 2M | | | | | |
| | 400°C | E32-D73-S 2M | 280 | 120 | 80 | 36 | |

Area Detection Models

| Sensing method | Type | Sensing width | Model | Sensing distance (mm) | | | |
|----------------|-------|---------------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | Area | 11 mm | E32-T16PR 2M | 3,100 | 1,700 | 1,120 | 440 |
| | | | E32-T16JR 2M | 2,750 | 1,500 | 960 | 380 |
| | | 30 mm | E32-T16WR 2M | 4,000 * | 2,600 | 1,700 | 680 |
| Reflective | Array | 11 mm | E32-D36P1 2M | 700 | 300 | 200 | 90 |

* The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

Liquid-level Detection Models

| Sensing method | Tube diameter | Feature | Model | Sensing distance (mm) | | | |
|---|-----------------------|------------------------------------|--------------|--|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Tube-mounting | 3.2, 6.4, or 9.5 dia. | Stable residual quantity detection | E32-A01 5M | Applicable tube: Transparent tube with a diameter of 3.2, 6.4, or 9.5 mm, Recommended wall thickness: 1 mm | | | |
| | 8 to 10 dia. | Mounting at multiple levels | E32-L25T 2M | Applicable tube: Transparent tube with a diameter of 8 to 10 mm, Recommended wall thickness: 1 mm | | | |
| | No restrictions | Large tubes | E32-D36T 5M | Applicable tube: Transparent tube (no restrictions on diameter) | | | |
| Liquid contact (heat-resistant up to 200°C) | --- | --- | E32-D82F1 4M | Liquid-contact type | | | |

Vacuum-resistant Models

| Sensing method | Heat-resistant temperature | Model | Sensing distance (mm) | | | |
|----------------|----------------------------|---------------------|-----------------------|---------------|-----------------|-----------------------|
| | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Through-beam | 120°C | E32-T51V 1M | 720 | 400 | 260 | 100 |
| | | E32-T51V 1M+E39-F1V | 2,000 * | 2,000 * | 1,360 | 520 |
| | 200°C | E32-T84SV 1M | 1,760 | 950 | 640 | 260 |

* The fiber length is 1 m on each side, so the sensing distance is given as 2,000 mm.

Models for FPD, Semiconductors, and Solar Cells

| Sensing method | Application | Operating temperature | Model | Sensing distance (mm) | | | |
|--------------------|---------------------------|-----------------------|--------------|-----------------------|---------------|-----------------|-----------------------|
| | | | | Giga mode | Standard mode | High-speed mode | Super-high-speed mode |
| Limited-reflective | Glass presence detection | 70°C | E32-L16-N 2M | 0 to 15 | | | 0 to 12 |
| | | | E32-A08 2M | 10 to 20 | | | --- |
| | Glass substrate alignment | 300°C | E32-A08H2 3M | 12 to 30 | | | --- |
| | | | E32-A12 2M | 15 to 38 | | | --- |
| | Glass substrate mapping | 300°C | E32-A09 2M | 20 to 30 (center 25) | | | --- |
| | | | E32-A09H2 2M | | | | |
| Through-beam | Wafer mapping | 70°C | E32-A03 2M | 3,220 | 1,780 | 1,200 | 500 |
| | | | E32-A03-1 2M | | | | |
| Through-beam | Wafer mapping | 70°C | E32-A04 2M | 1,280 | 680 | 450 | 200 |
| | | | E32-T24SR 2M | 4,000 * | 2,200 | 1,460 | 580 |
| | | | E32-T24S 2M | 4,000 * | 2,600 | 1,740 | 700 |
| | | | | | | | |

* The fiber length is 2 m on each side, so the sensing distance is given as 4,000 mm.

I/O Circuit Diagrams

NPN Output

| Models | Operation mode | Timing chart | L/D indicators | Output circuit |
|---------------------------------|----------------|--------------|----------------|---|
| E3X-HD11 E3X-HD6 E3X-HD14 | Light-ON | | L lit. | <p>M8 Connector Pin Arrangement</p> <p>Note: Pin 2 is not used.</p> |
| | Dark-ON | | D lit. | |


PNP Output

| Models | Operation mode | Timing chart | L/D indicators | Output circuit |
|---------------------------------|----------------|--------------|----------------|---|
| E3X-HD41 E3X-HD8 E3X-HD44 | Light-ON | | L lit. | <p>M8 Connector Pin Arrangement</p> <p>Note: Pin 2 is not used.</p> |
| | Dark-ON | | D lit. | |

| ON delay | OFF delay | One-shot |
|----------|-----------|----------|
| | | |

Note: Timing Charts for Timer Settings (T: Set Time)


Plug (Sensor I/O Connector)

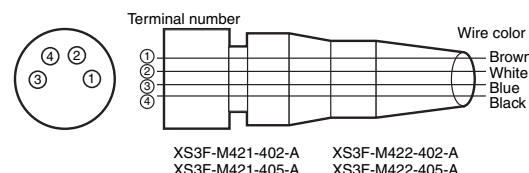

| Wire color | Connection pin | Application |
|------------|----------------|--------------------|
| Brown | 1 | Power supply (+V) |
| White | 2 | --- |
| Blue | 3 | Power supply (0 V) |
| Black | 4 | Output |

Note: Pin 2 is not used.

Nomenclature

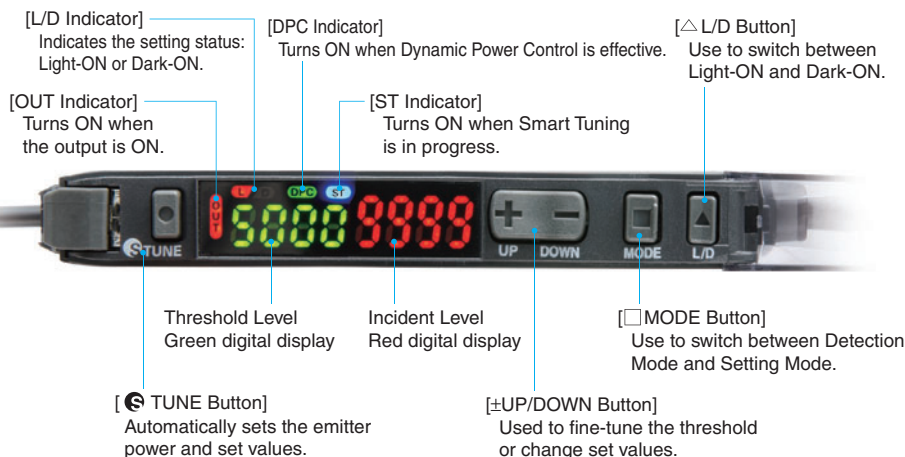

Safety Precautions

Refer to the *Fiber Sensors Technical Guide* for precautions that apply to all Fiber Sensors.

Warning

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.



Caution

Do not use the product with voltage in excess of the rated voltage.

Excess voltage may result in malfunction or fire.



Never use the product with AC power supply.

Otherwise, explosion may result.




Precautions for Safe Use

The following precautions must be observed to ensure safe operation of the Sensor.

1. Do not use the Sensor in environments subject to flammable or explosive gases.
2. Do not use the Sensor in environments subject to exposure to water, oil, chemicals, etc.
3. Do not install the Sensor in environments subject to intense electric fields or ferromagnetic fields.
4. Do not attempt to disassemble, repair, or modify the Sensor in any way.
5. Do not apply voltages or currents that exceed the rated ranges.
6. Do not use the Sensor in any atmosphere or environment that exceeds the ratings.
7. Wire the power supply correctly, including the polarity.
8. Connect the load correctly.
9. Do not short both ends of the load.
10. Do not use the Sensor if the case is damaged.
11. When disposing of the Sensor, treat it as industrial waste.
12. High-Voltage lines and power lines must be wired separately from this Sensor.
Wiring them together or placing them in the same duct may cause induction, resulting in malfunction or damage.
13. Before setting the Sensor, take appropriate safety measures, such as stopping the equipment.

Precautions for Correct Use

- Do not install the Sensor in the following locations.
 1. Locations subject to direct sunlight
 2. Locations subject to condensation due to high humidity
 3. Locations subject to corrosive gas
 4. Locations subject to vibration or mechanical shocks exceeding the rated values
- Use an extension cable with a minimum thickness of 0.3 mm² and less than 100 m long.
- Do not subject the cable to more than the following forces. Pull: 40 N; torque: 0.1 N·m; pressure: 20 N; bending: 3 kg
- The Sensor is ready to operate 200 ms after the power supply is turned ON. If the Sensor and load are connected to power supplies separately, turn ON the power supply to the Sensor first.
- When using Amplifier Units with Wire-saving Connectors, attach the protective stickers (provided with E3X-CN-series Connectors) on the unused power pins to prevent electrical shock and short circuiting. When using Amplifier Units with Connectors for Communications Units, attach the protective caps.

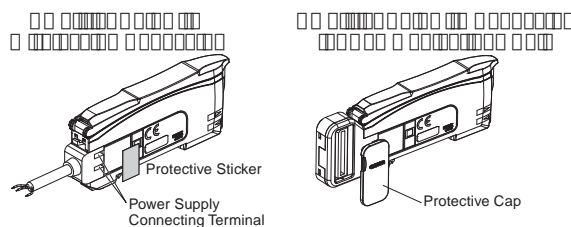


- Output pulses may occur when the power supply is turned OFF. Turn OFF the power supply to the load or load line first.
- Excessive incident light cannot be sufficiently handled by the mutual interference prevention function and may cause malfunction. To prevent this, set a higher threshold level.
- Make sure that the power supply is turned OFF before connecting, separating, or adding Amplifier Units.
- Do not pull on or apply excessive pressure or force (exceeding 9.8N) to the Fiber Unit when it is attached to the Amplifier Unit.
- The E3X-MC11, E3X-MC11-SV2 and E3X-MC11-S Mobile Consoles cannot be used.
- Mutual interference prevention on the E3X-HD Series does not function among the E3NX-FA, E3X-DA-N, E3X-SD, or E3X-NA Fiber Amplifier Units.
Mutual interference prevention on the E3X-HD Series does function among the E3X-DA-S and E3X-MDA Fiber Amplifier Units.
- The E3X-CRT and E3X-ECT Sensor Communications Unit can be used with the E3X-HD0, but the E3X-DRT21-S and E3NW-ECT Sensor Communications Units cannot be used.
- Always keep the protective cover in place when using the Amplifier Unit. Not doing so may cause malfunction.
- Do not use thinner, benzene, acetone, and kerosene for cleaning.

For technical information and product FAQs, refer to the *Technical Guide* on your OMRON website.

Mounting the Fiber Amplifier Units

■ Mounting on DIN Track


- Let the hook on the Amplifier Unit's Fiber Unit connection side catch the track and push the unit until it clicks.



■ Removing from DIN Track


- Push the unit in the direction 1.
- Lift it up in the direction 2.

Note: Refer to I/O Circuit Diagrams or check the side of the unit for wire color and role indications.



■ Mounting Amplifier Units in Group (Connector Type Models)

- Mount the Fiber Amplifier units one at a time onto the DIN track and push them until they click.
- Slide the Fiber Amplifier units in the direction 2.
- Use End Plates (PFP-M: separately sold) at the both ends of the grouped Fiber Amplifier units to prevent them from separating due to vibration or other cause.
- Tighten the screw on the End Plates using a driver.

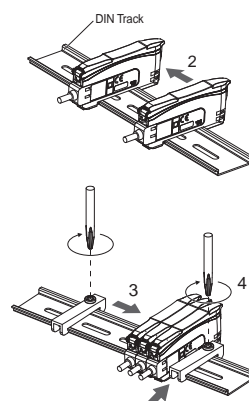

Tighten the screw while pressing the End Plate.

- Under environments such as vibration, use an end plates even with a single Fiber Amplifier Unit.
- The maximum numbers of connectable Amplifier Units are given in the following table.

| | Maximum number of interconnected | Maximum number of mutual interference prevention |
|--|----------------------------------|--|
| E3X-HD series standard models (E3X-HD11/HD41/HD6/HD8) | 16 | 10 |
| E3X-HD0 | With E3X-ECT | 10 |
| | With E3X-CRT | 10 |

- The mutual interference prevention function cannot be used if the detection mode is set to super-high-speed mode (SHS).
- If Units are to be connected, the allowable ambient temperature will change with the number of Units that are connected. Check the Ratings and Specifications.
- Always turn OFF the power before connecting or disconnecting Units.

Mounting Fiber Units


■ Use Fiber Cutter

Cut a thin fiber as follows.
For standard fibers, insert to the desired cutting position and cut.


| | | |
|----|---|---|
| 1. | The fiber is shipped loosely tightened as shown in the figure at the right. | Thin Fiber Attachment (E39-F9) Loosely tighten. |
| 2. | Adjust the fiber to the desired length and fully tighten. | |
| 3. | Insert the Fiber Unit into E39-F4 and cut it. | Fiber Cutter E39-F4 Standard Fiber Unit Hole (dia. 2.2 mm) x 3 Thin-diameter Fiber Unit Hole x 2 |
| 4. | Finished state. (Correctly cut end) | About 0.5 mm Insertion direction □□□□ The insertion direction into the Fiber Amplifier Unit is shown in the above figure. |

■ Mount Fiber Unit

- Open the protective cover.
- Raise the lock lever.
- Insert the Fiber Unit in the fiber unit hole to the bottom.
- Return the lock lever to the original position and fix the Fiber Unit.

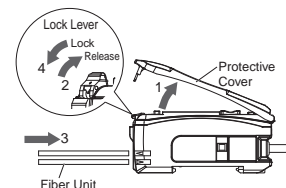

- When mounting a coaxial reflective Fiber Unit, insert the single-core Fiber Unit to the upper hole (Emitter side) and the multi-core Fiber Unit to the lower hole (Receiver side). The cables for the Single-core Fiber Units (Emitters) have identification marks. Refer to the dimensions diagrams for details.



- When removing the Fiber Unit, follow the above steps in reverse order. To maintain the characteristics of the Fiber Unit, make sure the lock is released before removing the Fiber Unit.

Dimensions


Tolerance class IT16 applies to dimensions in this data sheet unless otherwise specified.

Fiber Amplifier Units

Pre-wired Amplifier Units

E3X-HD11


E3X-HD41

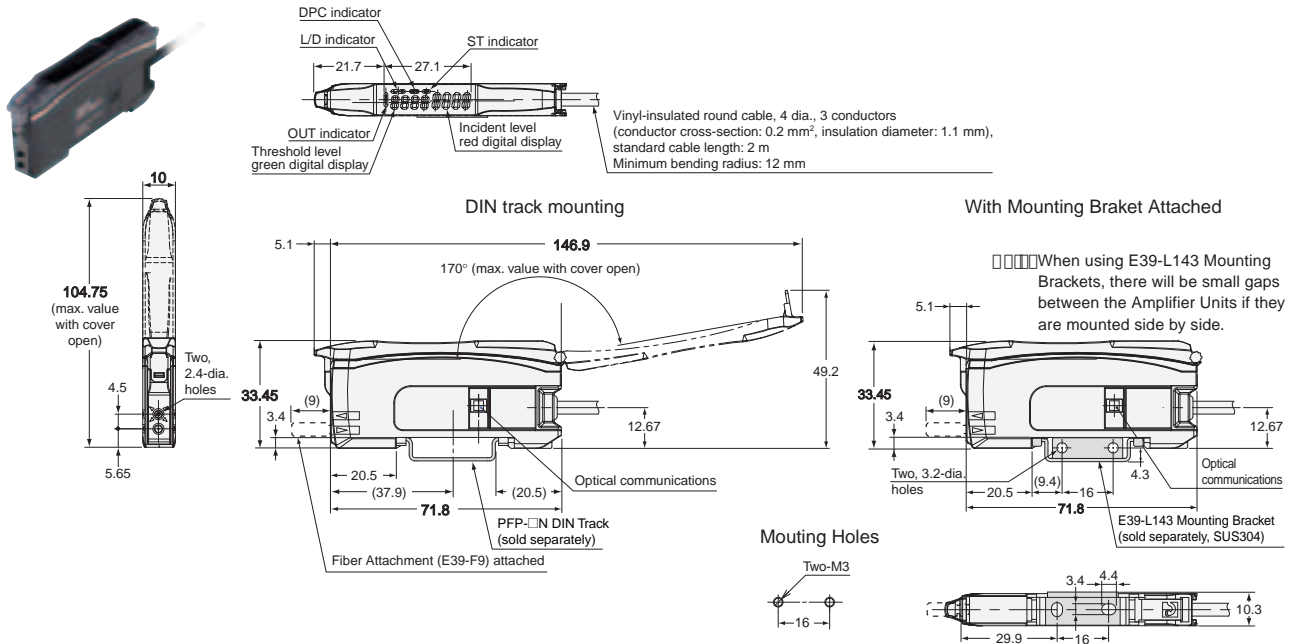

Amplifier Units with Wire-saving Connectors

E3X-HD6

E3X-HD8



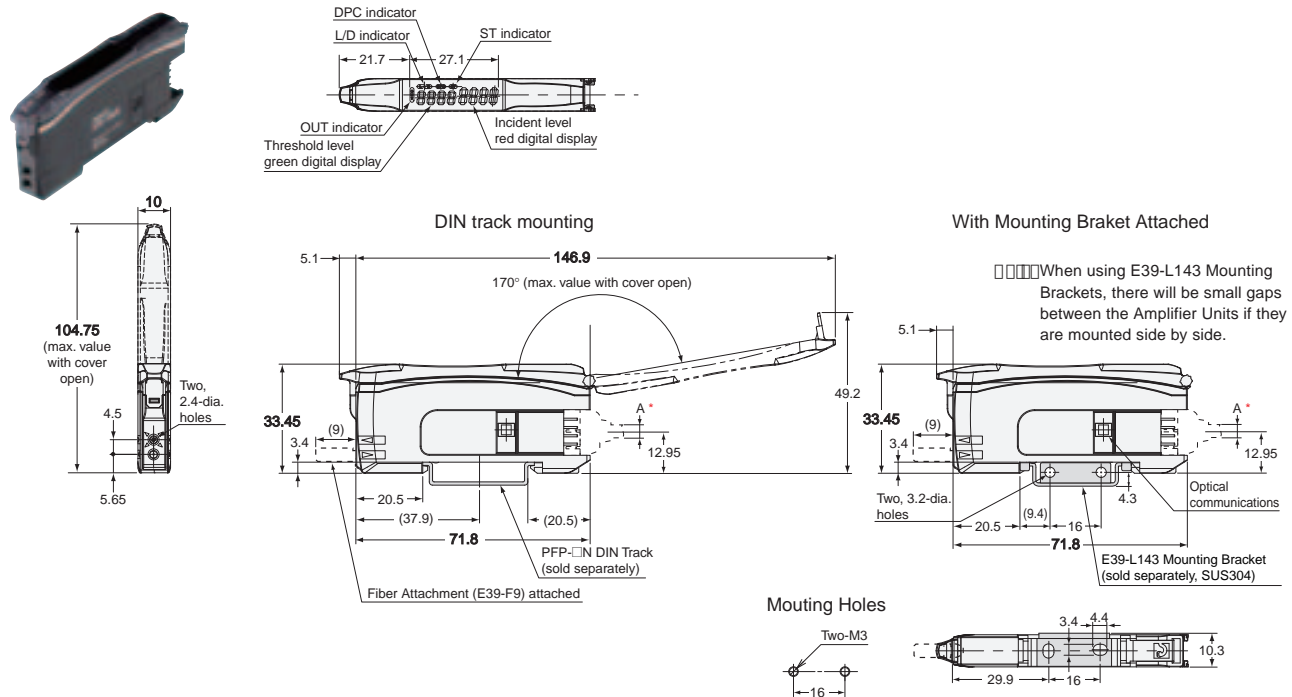


* The cable diameters are as follows:

| | |
|-------------------------|----------|
| E3X-CN11 (3 conductors) | 4.0 dia. |
| E3X-CN12 (1 conductor) | 2.6 dia. |


Amplifier Units with M8 Connectors

E3X-HD14
E3X-HD44

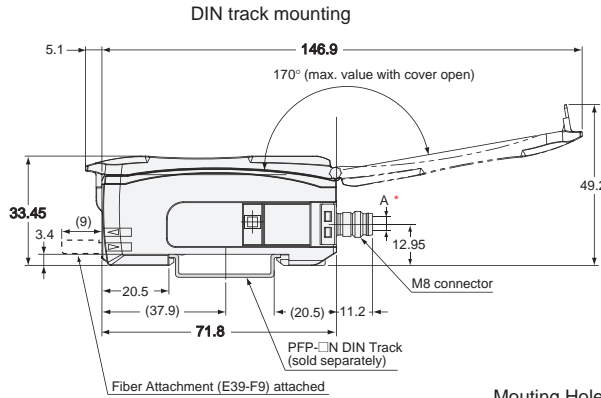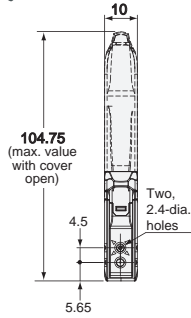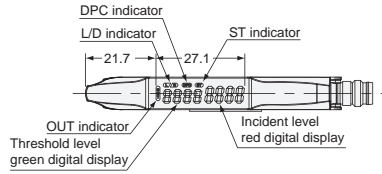


With Mounting Bracket Attached

□□□□When using E39-L143 Mounting Brackets, there will be small gaps between the Amplifier Units if they are mounted side by side.

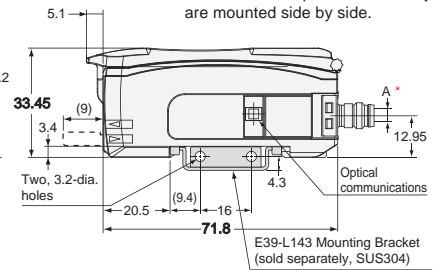

Mounting Holes






* The cable diameters are as follows:

| | |
|-------------------------|----------|
| E3X-CN11 (3 conductors) | 4.0 dia. |
| E3X-CN12 (1 conductor) | 2.6 dia. |


Amplifier Unit with Connector for Sensor Communications Unit

E3X-HD0

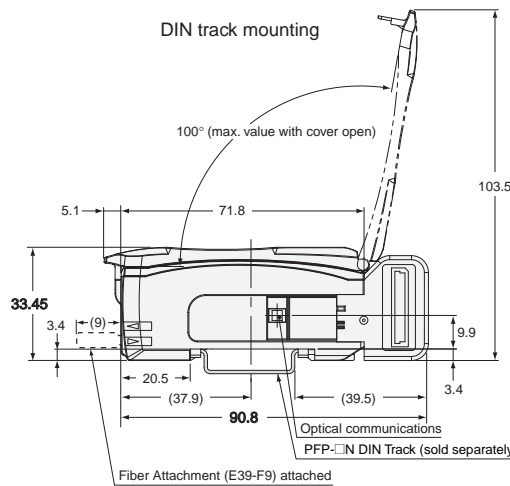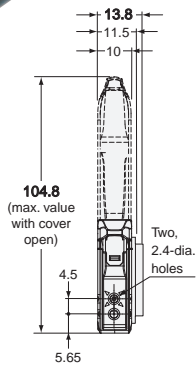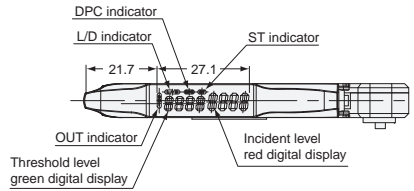


With Mounting Bracket Attached

□□□□When using E39-L143 Mounting Brackets, there will be small gaps between the Amplifier Units if they are mounted side by side.

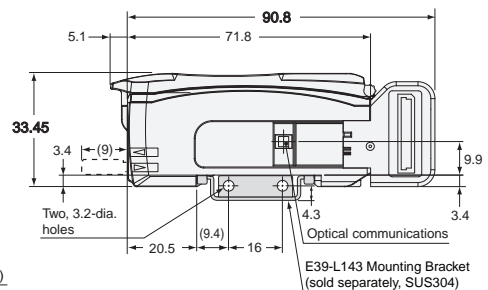

Mounting Holes

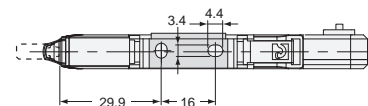

Refer to E32 Series for details on Fiber Units.

Terms and Conditions of Sale

1. **Offer; Acceptance.** These terms and conditions (these "**Terms**") are deemed part of all quotes, agreements, purchase orders, acknowledgments, price lists, catalogs, manuals, brochures and other documents, whether electronic or in writing, relating to the sale of products or services (collectively, the "**Products**") by Omron Electronics LLC and its subsidiary companies ("**Omron**"). Omron objects to any terms or conditions proposed in Buyer's purchase order or other documents which are inconsistent with, or in addition to, these Terms.
2. **Prices; Payment Terms.** All prices stated are current, subject to change without notice by Omron. Omron reserves the right to increase or decrease prices on any unshipped portions of outstanding orders. Payments for Products are due net 30 days unless otherwise stated in the invoice.
3. **Discounts.** Cash discounts, if any, will apply only on the net amount of invoices sent to Buyer after deducting transportation charges, taxes and duties, and will be allowed only if (i) the invoice is paid according to Omron's payment terms and (ii) Buyer has no past due amounts.
4. **Interest.** Omron, at its option, may charge Buyer 1-1/2% interest per month or the maximum legal rate, whichever is less, on any balance not paid within the stated terms.
5. **Orders.** Omron will accept no order less than \$200 net billing.
6. **Governmental Approvals.** Buyer shall be responsible for, and shall bear all costs involved in, obtaining any government approvals required for the importation or sale of the Products.
7. **Taxes.** All taxes, duties and other governmental charges (other than general real property and income taxes), including any interest or penalties thereon, imposed directly or indirectly on Omron or required to be collected directly or indirectly by Omron for the manufacture, production, sale, delivery, importation, consumption or use of the Products sold hereunder (including customs duties and sales, excise, use, turnover and license taxes) shall be charged to and remitted by Buyer to Omron.
8. **Financial.** If the financial position of Buyer at any time becomes unsatisfactory to Omron, Omron reserves the right to stop shipments or require satisfactory security or payment in advance. If Buyer fails to make payment or otherwise comply with these Terms or any related agreement, Omron may (without liability and in addition to other remedies) cancel any unshipped portion of Products sold hereunder and stop any Products in transit until Buyer pays all amounts, including amounts payable hereunder, whether or not then due, which are owing to it by Buyer. Buyer shall in any event remain liable for all unpaid accounts.
9. **Cancellation; Etc.** Orders are not subject to rescheduling or cancellation unless Buyer indemnifies Omron against all related costs or expenses.
10. **Force Majeure.** Omron shall not be liable for any delay or failure in delivery resulting from causes beyond its control, including earthquakes, fires, floods, strikes or other labor disputes, shortage of labor or materials, accidents to machinery, acts of sabotage, riots, delay in or lack of transportation or the requirements of any government authority.
11. **Shipping; Delivery.** Unless otherwise expressly agreed in writing by Omron:
 - a. Shipments shall be by a carrier selected by Omron; Omron will not drop ship except in "break down" situations.
 - b. Such carrier shall act as the agent of Buyer and delivery to such carrier shall constitute delivery to Buyer;
 - c. All sales and shipments of Products shall be FOB shipping point (unless otherwise stated in writing by Omron), at which point title and risk of loss shall pass from Omron to Buyer; provided that Omron shall retain a security interest in the Products until the full purchase price is paid;
 - d. Delivery and shipping dates are estimates only; and
 - e. Omron will package Products as it deems proper for protection against normal handling and extra charges apply to special conditions.
12. **Claims.** Any claim by Buyer against Omron for shortage or damage to the Products occurring before delivery to the carrier must be presented in writing to Omron within 30 days of receipt of shipment and include the original transportation bill signed by the carrier noting that the carrier received the Products from Omron in the condition claimed.
13. **Warranties.** (a) **Exclusive Warranty.** Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied. (b) **Limitations.** OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) **Buyer Remedy.** Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty. See <http://www.omron247.com> or contact your Omron representative for published information.
14. **Limitation on Liability; Etc.** OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY. Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.
15. **Indemnities.** Buyer shall indemnify and hold harmless Omron Companies and their employees from and against all liabilities, losses, claims, costs and expenses (including attorney's fees and expenses) related to any claim, investigation, litigation or proceeding (whether or not Omron is a party) which arises or is alleged to arise from Buyer's acts or omissions under these Terms or in any way with respect to the Products. Without limiting the foregoing, Buyer (at its own expense) shall indemnify and hold harmless Omron and defend or settle any action brought against such Companies to the extent based on a claim that any Product made to Buyer specifications infringed intellectual property rights of another party.
16. **Property; Confidentiality.** Any intellectual property in the Products is the exclusive property of Omron Companies and Buyer shall not attempt to duplicate it in any way without the written permission of Omron. Notwithstanding any charges to Buyer for engineering or tooling, all engineering and tooling shall remain the exclusive property of Omron. All information and materials supplied by Omron to Buyer relating to the Products are confidential and proprietary, and Buyer shall limit distribution thereof to its trusted employees and strictly prevent disclosure to any third party.
17. **Export Controls.** Buyer shall comply with all applicable laws, regulations and licenses regarding (i) export of products or information; (ii) sale of products to "forbidden" or other proscribed persons; and (iii) disclosure to non-citizens of regulated technology or information.
18. **Miscellaneous.** (a) **Waiver.** No failure or delay by Omron in exercising any right and no course of dealing between Buyer and Omron shall operate as a waiver of rights by Omron. (b) **Assignment.** Buyer may not assign its rights hereunder without Omron's written consent. (c) **Law.** These Terms are governed by the law of the jurisdiction of the home office of the Omron company from which Buyer is purchasing the Products (without regard to conflict of law principles). (d) **Amendment.** These Terms constitute the entire agreement between Buyer and Omron relating to the Products, and no provision may be changed or waived unless in writing signed by the parties. (e) **Severability.** If any provision hereof is rendered ineffective or invalid, such provision shall not invalidate any other provision. (f) **Setoff.** Buyer shall have no right to set off any amounts against the amount owing in respect of this invoice. (g) **Definitions.** As used herein, "including" means "including without limitation"; and "Omron Companies" (or similar words) mean Omron Corporation and any direct or indirect subsidiary or affiliate thereof.

Certain Precautions on Specifications and Use

1. **Suitability of Use.** Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases but the following is a non-exhaustive list of applications for which particular attention must be given: (i) Outdoor use, uses involving potential chemical contamination or electrical interference, or conditions or uses not described in this document. (ii) Use in consumer products or any use in significant quantities. (iii) Energy control systems, combustion systems, railroad systems, aviation systems, medical equipment, amusement machines, vehicles, safety equipment, and installations subject to separate industry or government regulations. (iv) Systems, machines and equipment that could present a risk to life or property. Please know and observe all prohibitions of use applicable to this Product. NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON'S PRODUCT IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.
2. **Programmable Products.** Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.
3. **Performance Data.** Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.
4. **Change in Specifications.** Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.
5. **Errors and Omissions.** Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

