

ACT20P
ACT20P-BRIDGE-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

**ACT20P: The flexible solution**

- Precise and highly functional signal converters
- Simple configuration via display (Pro DCDC II), FDT/DTM software or DIP switch
- Release levers simplify handling
- More space in the control cabinet, from 12.5 mm wide for two channels

General ordering data

Type	ACT20P-BRIDGE-S
Order No.	1067250000
Version	Measuring bridge converter, Resistance measuring bridge, 0(4)-20 mA
GTIN (EAN)	4032248820856
Qty.	1 pc(s).

ACT20P
ACT20P-BRIDGE-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data
Dimensions and weights

Width	22.5 mm	Width (inches)	0.886 inch
Height	117.2 mm	Height (inches)	4.614 inch
Depth	113.6 mm	Depth (inches)	4.472 inch
Net weight	156.9 g		

Temperatures

Humidity	10...90 % (no condensation)	Operating temperature, max.	70 °C
Operating temperature, min.	-40 °C	Storage temperature, max.	85 °C
Storage temperature, min.	-40 °C	Operating temperature	-40 °C...70 °C
Storage temperature	-40 °C...85 °C		

Probability of failure

MTTF	543 Years
------	-----------

Input

Number of inputs	1	Sensor	Resistance measuring bridge, Total resistance of all parallel resistance measuring bridges: min. 87Ω
Sensor supply	120 mA @ 10 V (= 4 x 350 Ω bridge resistors)	Input measurement range	± 10 mV / ± 20 mV / ± 30 mV / ± 50 mV (adjustable)
Bridge supply voltage	5 V or 10 V	Bridge sensitivity	1.0 mV / V to 5.0 mV / V

Output

Type	Voltage and current output (configurable)	Output voltage, note	0 ... 11 V (adjustable)
Output current	0...22 mA (adjustable)	load impedance voltage	600 Ω
load impedance current	≤ 600 Ω		

General data

Configuration	DIP switch and button	Linearity	Typically ± 0.05 % of signal range
Long-term drift	0.1 % / 10.000 h	Mounting rail	TS 35
Power consumption	3 W @ 24 V DC	Repeat accuracy	± 0.05% of signal range
Step response time	< 400 ms (10...90 %)	Supply voltage	10...60 V DC
Temperature coefficient	typ. 0.005 % / °C		

Insulation coordination

EMC standards	EN 61326	Insulation voltage	5.7 kV (input / output, input / supply)
Pollution severity	2	Rated voltage	300 V _{eff}
Surge voltage category	III		

Output (analogue)

Type (analogue output)	Voltage and current output (configurable)
------------------------	---

Creation date October 8, 2018 7:19:14 PM CEST

ACT20P
ACT20P-BRIDGE-S

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Connection data**

Type of connection	Screw connection	Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.6 Nm	Clamping range, rated connection	2.5 mm ²
Clamping range, min.	0.5 mm ²	Clamping range, max.	2.5 mm ²
Wire connection cross section AWG, min.	AWG 30	Wire connection cross section AWG, max.	AWG 14

Rated data UL

UL certificate	Listing no.: E256486
----------------	----------------------

Classifications

ETIM 3.0	EC002479	ETIM 4.0	EC002653
ETIM 5.0	EC002653	ETIM 6.0	EC002653
eClass 5.1	27-21-01-07	eClass 6.2	27-21-01-20
eClass 7.1	27-21-01-20	eClass 8.1	27-21-01-20
eClass 9.0	27-21-01-20	eClass 9.1	27-21-01-90

Approvals

Approvals



Approvals	CULUS;
ROHS	Conform

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity
Brochure/Catalogue	CAT 4.1 ELECTR 16/17 EN
Engineering Data	EPLAN, WSCAD
Engineering Data	STEP
Software	DIP switch configuration tool
User Documentation	Quickstart_german.pdf Instruction sheet

ACT20P
ACT20P-BRIDGE-S

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

Electric symbol

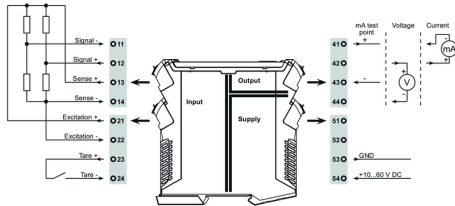

DIP switch setting

Excitation	DIP switch							
	1	2	3	4	5	6	7	8
10 V	■							
5 V								



Output	DIP switch							
	1	2	3	4	5	6	7	8
mA	■							
V								

Input span	DIP switch							
	1	2	3	4	5	6	7	8
10 mV			■					
20 mV				■				
30 mV					■			
50 mV						■		

Measuring method	DIP switch							
	1	2	3	4	5	6	7	8
4-wire							■	■
6-wire								

■ = ON

Dimensioned drawing

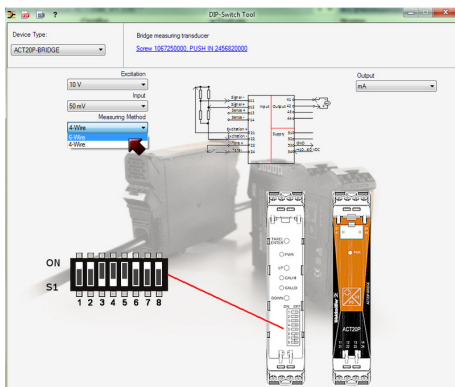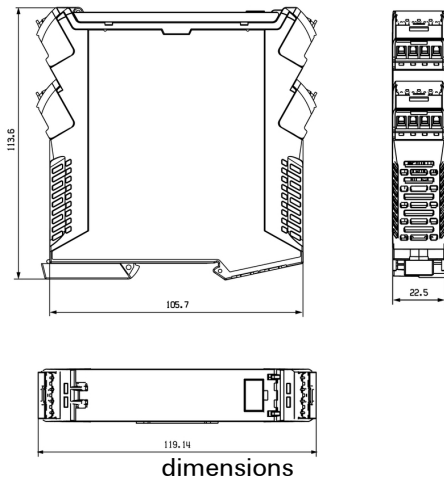

example for DIP switch setting (with ACT20 tool)