



30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5074

The PE15A5074 is a Class AB high power amplifier that operates in S-Band from 2000 MHz to 2600 MHz and generates up to 30 Watts RF output power and 12 watts linear power with 5% EVM @ 41 dBm. The module utilizes the latest Gallium Nitride (GaN) semiconductor technology with 45% power efficiency. The package design features a small form factor of <math><10\text{in}^3</math> that's ideal for size, weight, and power (SWaP) constrained applications used in broadband RF telemetry, tactical communication, electronic warfare, and unmanned aircraft systems, as well as software defined radios. Impressive typical performance includes 54 dB of linear gain, 1.9:1 VSWR, +43 dBm third order intercept point, and harmonic suppression of -18 dBc. Additionally with a nominal 0 dBm (1 mW) RF input power, the amplifier can provide 44 dB of gain and near-constant envelope waveforms. Operating voltage is +28 Vdc with 2.4A of DC current. Additional features include overvoltage protection, reverse voltage protection, and logic on/off control. The rugged Mil-Grade assembly supports female SMA RF input/output connectors and a micro-D 9 pin socket command control connector with an accessory cable assembly included. The operating baseplate temperature range is -40°C to +85°C and the unit is guaranteed to withstand up to 95% relative humidity, altitude levels up to 30,000 ft, and random vibration and shock profiles (see chart below). Pasternak also offers an accessory Harmonic filter option, model PEHFL0000 that can be used at the output of the PE15A5074 power amplifier. This lowpass RF filter has low insertion loss with power handling up to 50W and specifically designed to reduce harmonics at the output of transmitters operating at up through L-Band and offers rejection levels of greater than 25 dB from 3.25 GHz to 5 GHz. The filter is offered in a miniature SMA connectorized package.

Features

- 30W GaN High Power Amplifier
- 12W Linear Power with 5% EVM @ 41 dBm
- S Band Class AB Design
- Frequency Range: 2000 MHz to 2600 MHz
- 54 dB linear Gain
- VSWR: 1.9:1
- +43 dBm IP3
- PAE: 45%
- Small Form Factor Rugged Mil-Grade Package
- 50 Ohm Design
- Female SMA RF Connectors
- +28Vdc @ 2.4A DC current
- -40°C to +85°C Operating Baseplate Temperature
- Output Harmonic Filter Accessory Option

Applications

- Broadband RF Telemetry
- RF Communications Systems
- Electronic Warfare - Airborne Electronic Attack
- Unmanned Aircraft Systems (UAS)
- Unmanned Ground Vehicles (UGV), Software Defined Radios
- Data Links
- Transmitters
- Test & Measurement
- Telecom Infrastructure

Electrical Specifications (TA = +25°C, DC Voltage = 28Volts, DC Current = 2.4A)

Description	Minimum	Typical	Maximum	Units
Frequency Range	2		2.6	GHz
Small Signal Gain		54		dB
Gain Flatness		±2.5		dB
Input Power (CW)		+0		dBm
Pout at Sat.	20	30		Watts
Efficiency (PAE)		45		%
Output Power at 1 dB Compression Point		+31		dBm
Output 3rd Order Intercept Point		+43		dBm
Output Mismatch			10:1	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA PE15A5074](#)



30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5074

2nd Harmonics		-20		dBc
3rd Harmonics		-18		dBc
Impedance (Input)		50		Ohms
Impedance (Output)		50		Ohms
Input VSWR		1.9:1		
Switching Speed for On/Off Switch Gate			2	usec
Operating DC Voltage	27	28	30	Volts
Operating DC Current		2.4		A
Quiescent Current Biased (RF Enable Low)		650		mA
Quiescent Current Unbiased (RF Enable Floating)		100		mA
Operating Temperature Range	-40		+85	°C

Performance by Frequency

Description	F1	F2	F3	Units
Frequency Condition	2000	2300	2600	MHz
Output Power @ 1dB Compression, Typ	31	31	29	dBm
Small Signal Gain, Typ (@-40dBm Input)	51	49	49	dB
Third Order Intercept Point	44	44	43	dBm

Absolute Maximum Rating

Parameter	Rating	Unit
Max Device Voltage	32	V
Max Device Current	3.25	A
Max RF Input Power, $Z_L = 50 \Omega$	12.00	dBm
Max Operating Temperature (ambient)	85.00	°C
Max Operating Temperature (baseplate)	85.00	°C
Max Storage Temperature	85.00	°C



ESD Sensitive Material,
Transport material in
Approved ESD bags.
Handle only in approved
ESD Workstation.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA PE15A5074](#)



30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5074


Mechanical Specifications

Size

Length 4.5 in [114.3 mm]
Width 3.5 in [88.9 mm]
Height 0.61 in [15.49 mm]

Weight 0.6 lbs [272.16 g]
Input Connector SMA Female
Output Connector SMA Female
Bias Connector 9-Pin Micro-D Socket

Environmental Specifications

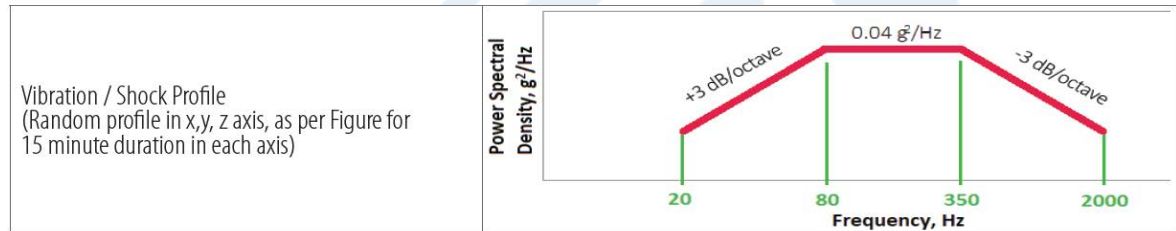

Temperature

Operating Range -40 to +85 deg C
Storage Range -55 to +85 deg C
Humidity 95% Non-Condensing
Altitude MIL-STD-810F Method 5004

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA PE15A5074](#)



30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5074

Amplifier Power-up Precautions

- 1.) Confirm that proper ESD precautions and controls are always in place before handling any Amplifier module.
- 2.) Confirm adequate thermal management is in place to effectively dissipate heat away from the Amplifier package. The Amplifier operational baseplate temperature must be within the operational temperature range stated in the Amplifier datasheet. Depending on the design and thermal requirements, using a heatsink with cooling fan is always recommended for safe reliable operation. A heat sink without a cooling fan may also be used. Damage caused from overheating will void the warranty.
- 3.) Confirm adequate system grounding is established. The DC power supply and Amplifier must have a common ground in order to operate properly.
- 4.) Power Amplifiers may require additional DC Current when initially powered-up. Depending on the design, the input current draw could range from an additional 10% to 100% above the maximum rated DC current of the Amplifier. This varies based on product part number.
- 5.) Confirm the DC power supply, if limited, is set to allow for additional start-up current that's rated for the Power Amplifier.
- 6.) Confirm the system is designed and calibrated for 50 ohms. Any impedance mismatch may cause performance issues.
- 7.) Perform a CALIBRATION (if required) with the loads before connecting the Amplifier to the Network Analyzer to ensure proper performance.
- 8.) Use a fixed attenuator between the signal source and input port of the Amplifier to optimize the input VSWR match.
- 9.) Confirm the input power level at the input port of the amplifier does not exceed the maximum rated limit for input power (as stated in the Amplifier datasheet).
 P_{in} for Small Signal Gain = P1dB-SSG-10 dB
 P_{in} for P1dB = P1dB-SSG+1 dB
- 10.) Confirm the Network Analyzer is always connected to the Amplifier first before DC power is applied to the Amplifier.
- 11.) As long as the input and output ports of the amplifier are connected to a 50Ohm load and RF signal power is applied, the Amplifier can be powered up with DC voltage.
- 12.) Confirm the Amplifier output load is matched for a 50 Ohm impedance and will not exceed the maximum rated VSWR or Return Loss limit for the Amplifier. Exceeding the maximum rated VSWR or Return Loss limit will result in reflected signal power that could damage the Amplifier and void the warranty.
- 13.) **Power Amplifier connected to an Antenna for signal transmission** - It's strongly recommended to use a high power fixed attenuator pad or an Isolator between the output port of the Amplifier and input port to the antenna. Any reflected signal power due to impedance mismatch will likely damage the Amplifier and void the warranty.
- 14.) The attenuator or isolator used at the output port of the Amplifier must be rated to handle the output power level and operational frequency band of the amplifier.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA PE15A5074](#)



30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA

TECHNICAL DATA SHEET

PE15A5074

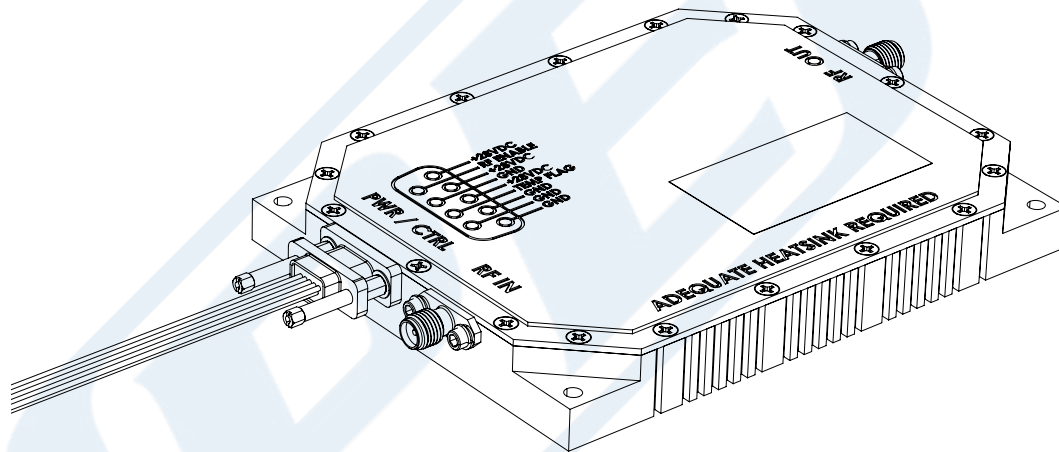


illustration of Amplifier & Interface Cable

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA PE15A5074](#)




30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA

TECHNICAL DATA SHEET


PE15A5074

Typical Performance Data


Output Power [0dBm Input Power]

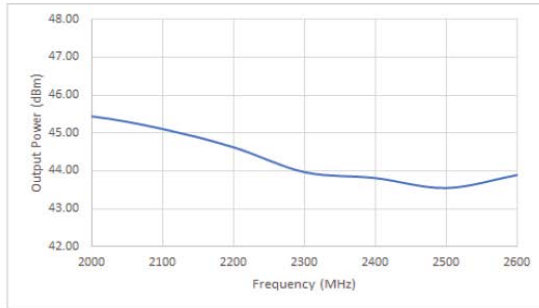


Small Signal Gain [-40dBm Input Power]

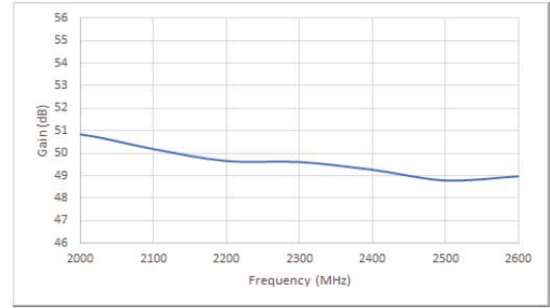

Output Power vs. Input Power

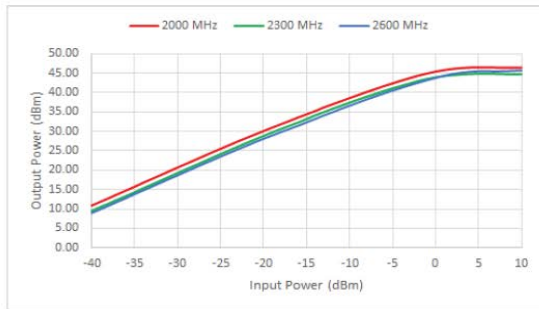

P1dB & P3dB

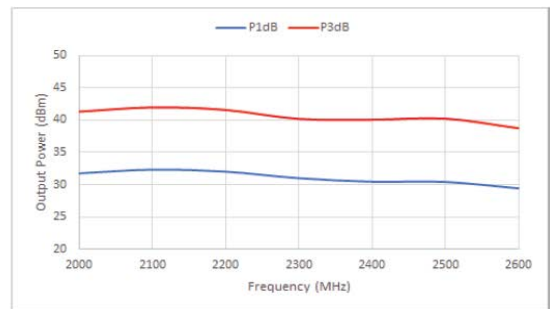

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA PE15A5074](#)




30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA


TECHNICAL DATA SHEET

PE15A5074


Efficiency vs. Output Power

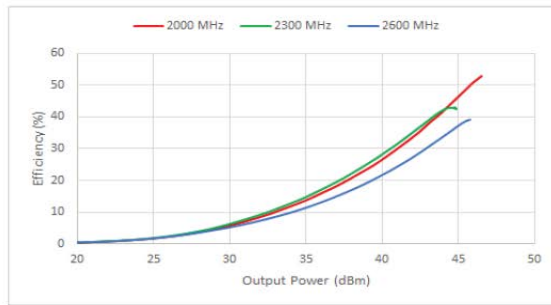


Harmonics [@Psat]

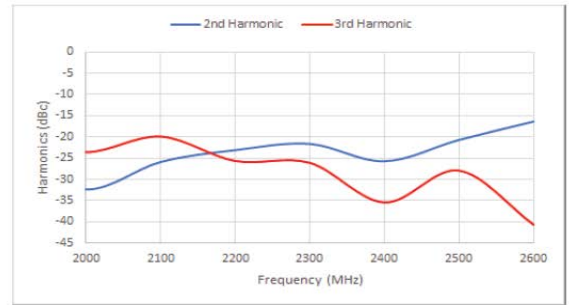

Output Power vs. Temperature [Baseplate]

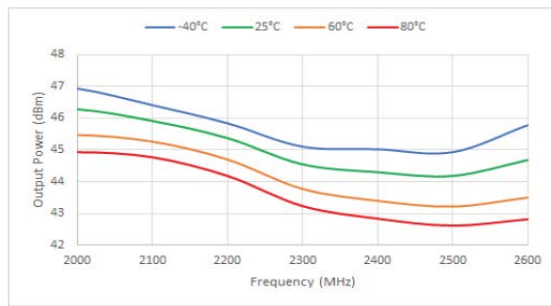

Error Vector Magnitude vs. Output Power [QPSK, 1Msps, 35% Roll Off Rate]

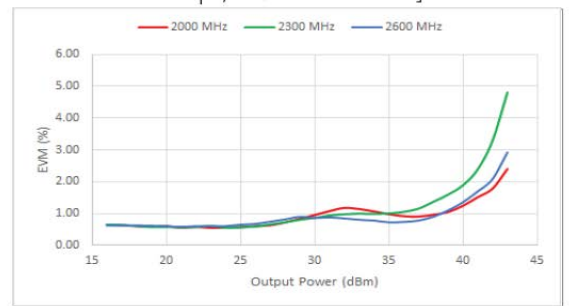

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA PE15A5074](#)




30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA


TECHNICAL DATA SHEET

PE15A5074


Error Vector Magnitude vs. Output Power [16QAM, 2Msps, 35% Roll Off Rate]

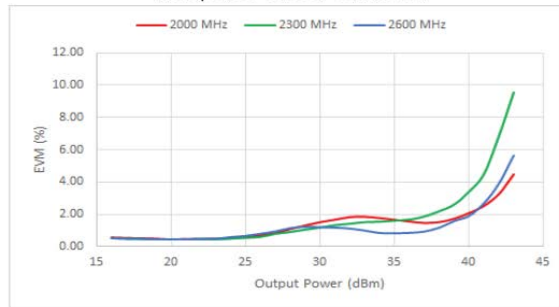


Error Vector Magnitude vs. Output Power [64QAM, 5Msps, 10% Roll Off Rate]

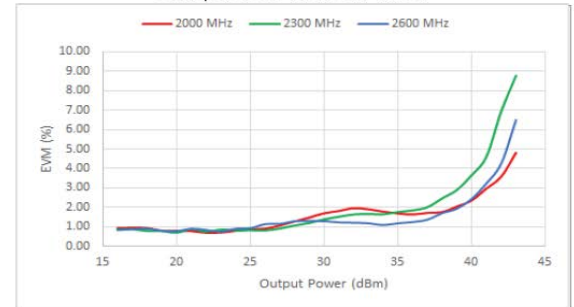

OIP3 [20dBm per tone, 1MHz spacing]

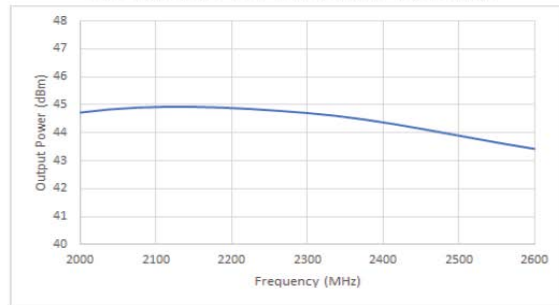

Input VSWR

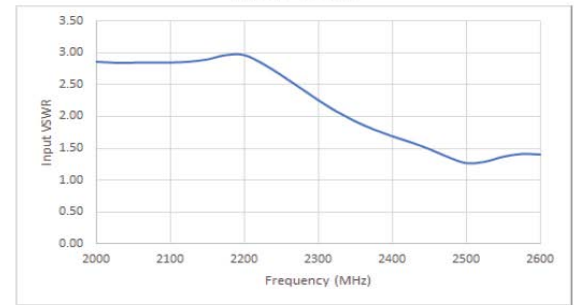

30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz, Class AB, S-Band, 45% Efficiency, 28V, SMA PE15A5074](https://www.pasternack.com/54-db-gain-2.6-ghz-medium-power-high-gain-amplifier-sma-pe15a5074-p.aspx)


URL: <https://www.pasternack.com/54-db-gain-2.6-ghz-medium-power-high-gain-amplifier-sma-pe15a5074-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



PE15A5074 CAD Drawing

30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/28/2020	T. GALLA

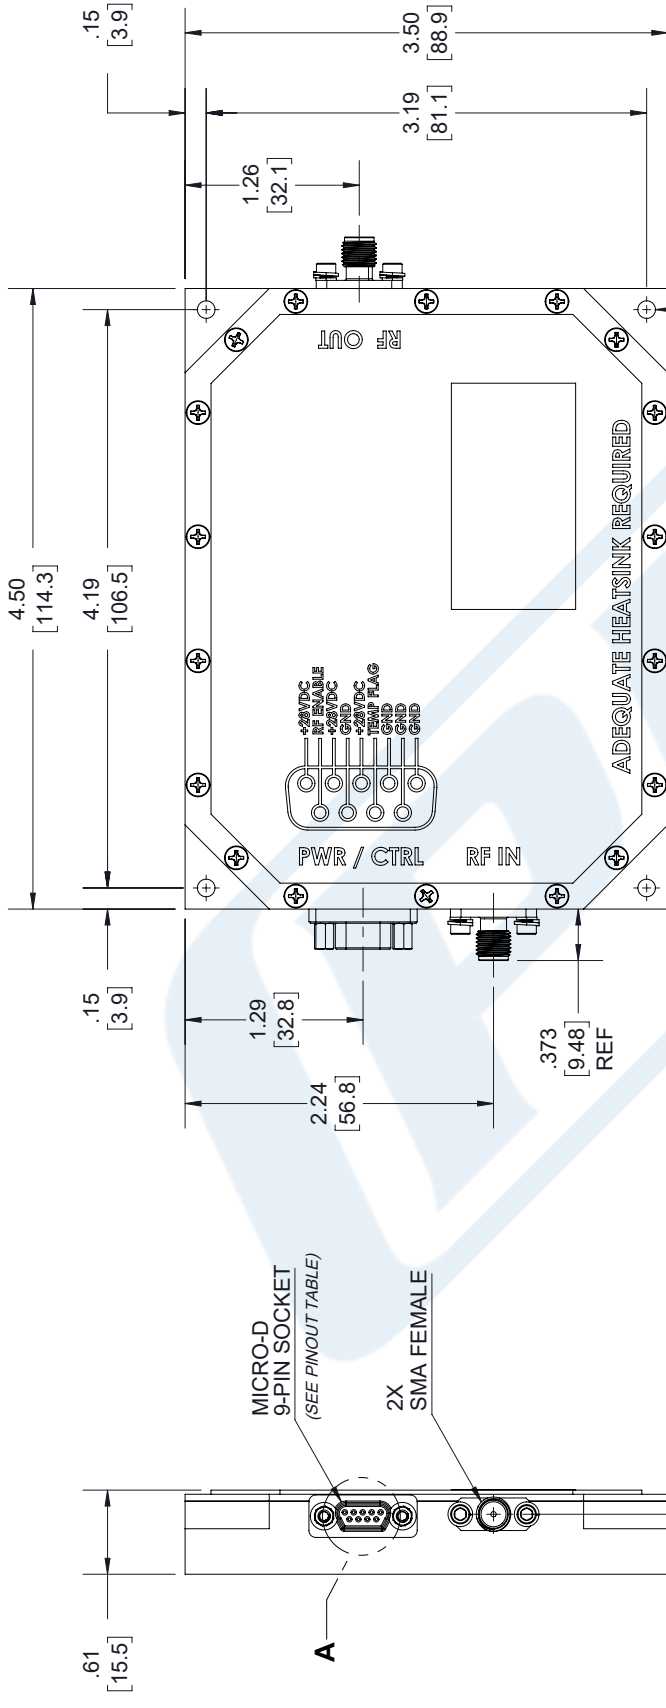

Pin #	I/O	Function
3,4,5	I	DC Power (+28 Volts)
1,2,6,8	I	Ground
7	0	Over Temperature Flag 0V = Temperature Fault +5V = No Fault
9	I	RF Enable 0V or GND = RF ON +5V or NC = RF OFF

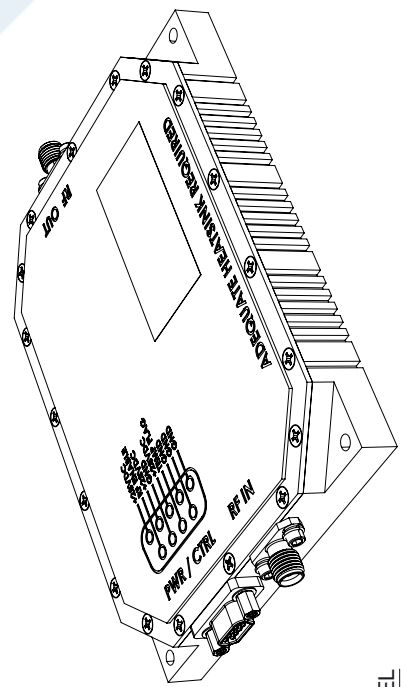

PE PASTERNAK
an INFINITI® brand

Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

SHEET 1 OF 3
SCALE N/A

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 .X = ±.2 [5.08] FRACTIONS ± 1/32
 .XX = ±.02 [.51] ANGLES ± 1°
 .XXX = ±.005 [.13] CABLE LENGTH (L) TOLERANCES:
 L ≤ 12 [305] = +1 [25] / -0
 12 [305] < L ≤ 60 [1524] = +2 [51] / -0
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
 300 [7620] < L = +5% / L / -0

ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.

SIZE A CAGE CODE A 53919 DRAWN BY K.DANG ITEM NO. PE15A5074 REV A



PE PASTERNAK
an INFINITI® brand
www.pasternack.com
PE15A5074
V001923YYMIMDDXXXX

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

PE15A5074 CAD Drawing

30 Watt GaN Power Amplifier, 2000 MHz to 2600 MHz,
Class AB, S-Band, 45% Efficiency, 28V, SMA

INTERFACE CABLE

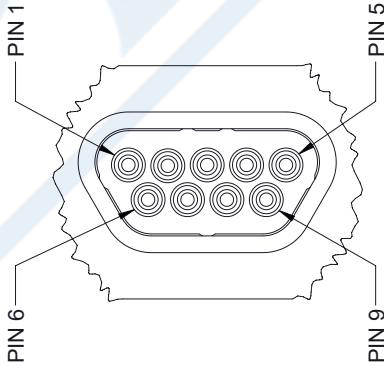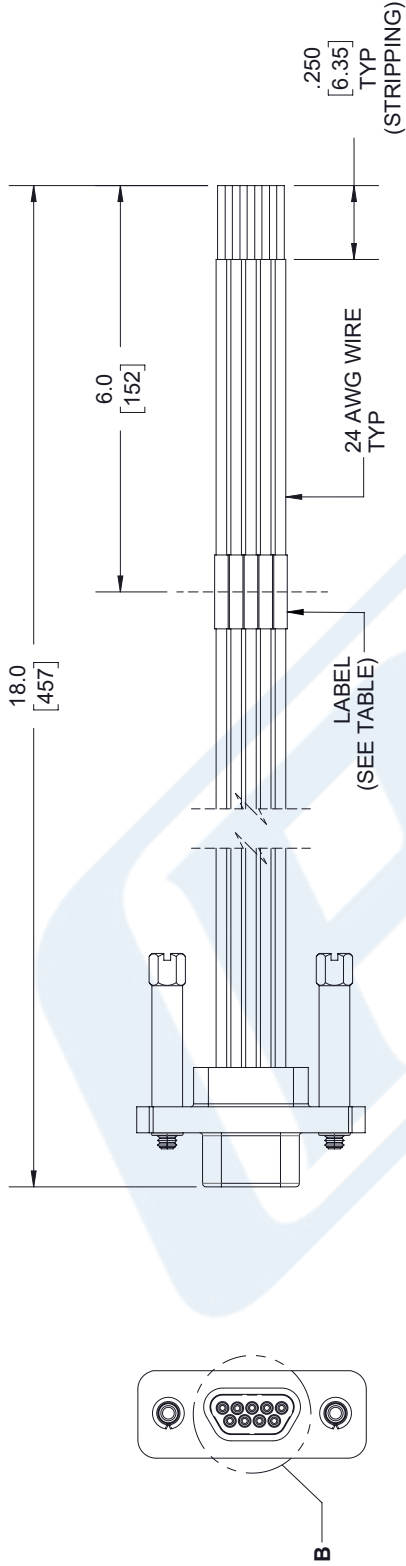

Pin #	Wire Color	Label
1	Black	GND
2	Brown	GND
3	Red	+ 28V
4	Orange	+ 28V
5	Yellow	+ 28V
6	Green	GND
7	Blue	Temp Flag
8	Purple	GND
9	Gray	RF Enable

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
 .X = ±.2 [5.08] FRACTIONS ± 1/32
 .XX = ±.02 [.51] ANGLES ± 1°
 .XXX = ±.005 [.13] CABLE LENGTH (L) TOLERANCES:
 L ≤ 12 [305] = +1 [25] / -0
 12 [305] < L ≤ 60 [1524] = +2 [51] / -0
 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
 300 [7620] < L = +5% / L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK
an INFINIT brand

Pasternack Enterprises, Inc.
P. O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

ITEM NO. PE15A5074
DRAWN BY K.DANG
CAGE CODE A 53919
SCALE N/A
SHEET 2 OF 3

THIRD-ANGLE PROJECTION

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.

REV A