


# ERK610Z222KTF0

Aliases (C814TF222K440X, ERK610RK4220KTF0)

Obsolete

ERK610 SFTY X1-440 Y2-300, Ceramic, 2200 pF, 10%, 440 VAC (X1), 300 VAC (Y2), Y5U, Lead Spacing = 10mm

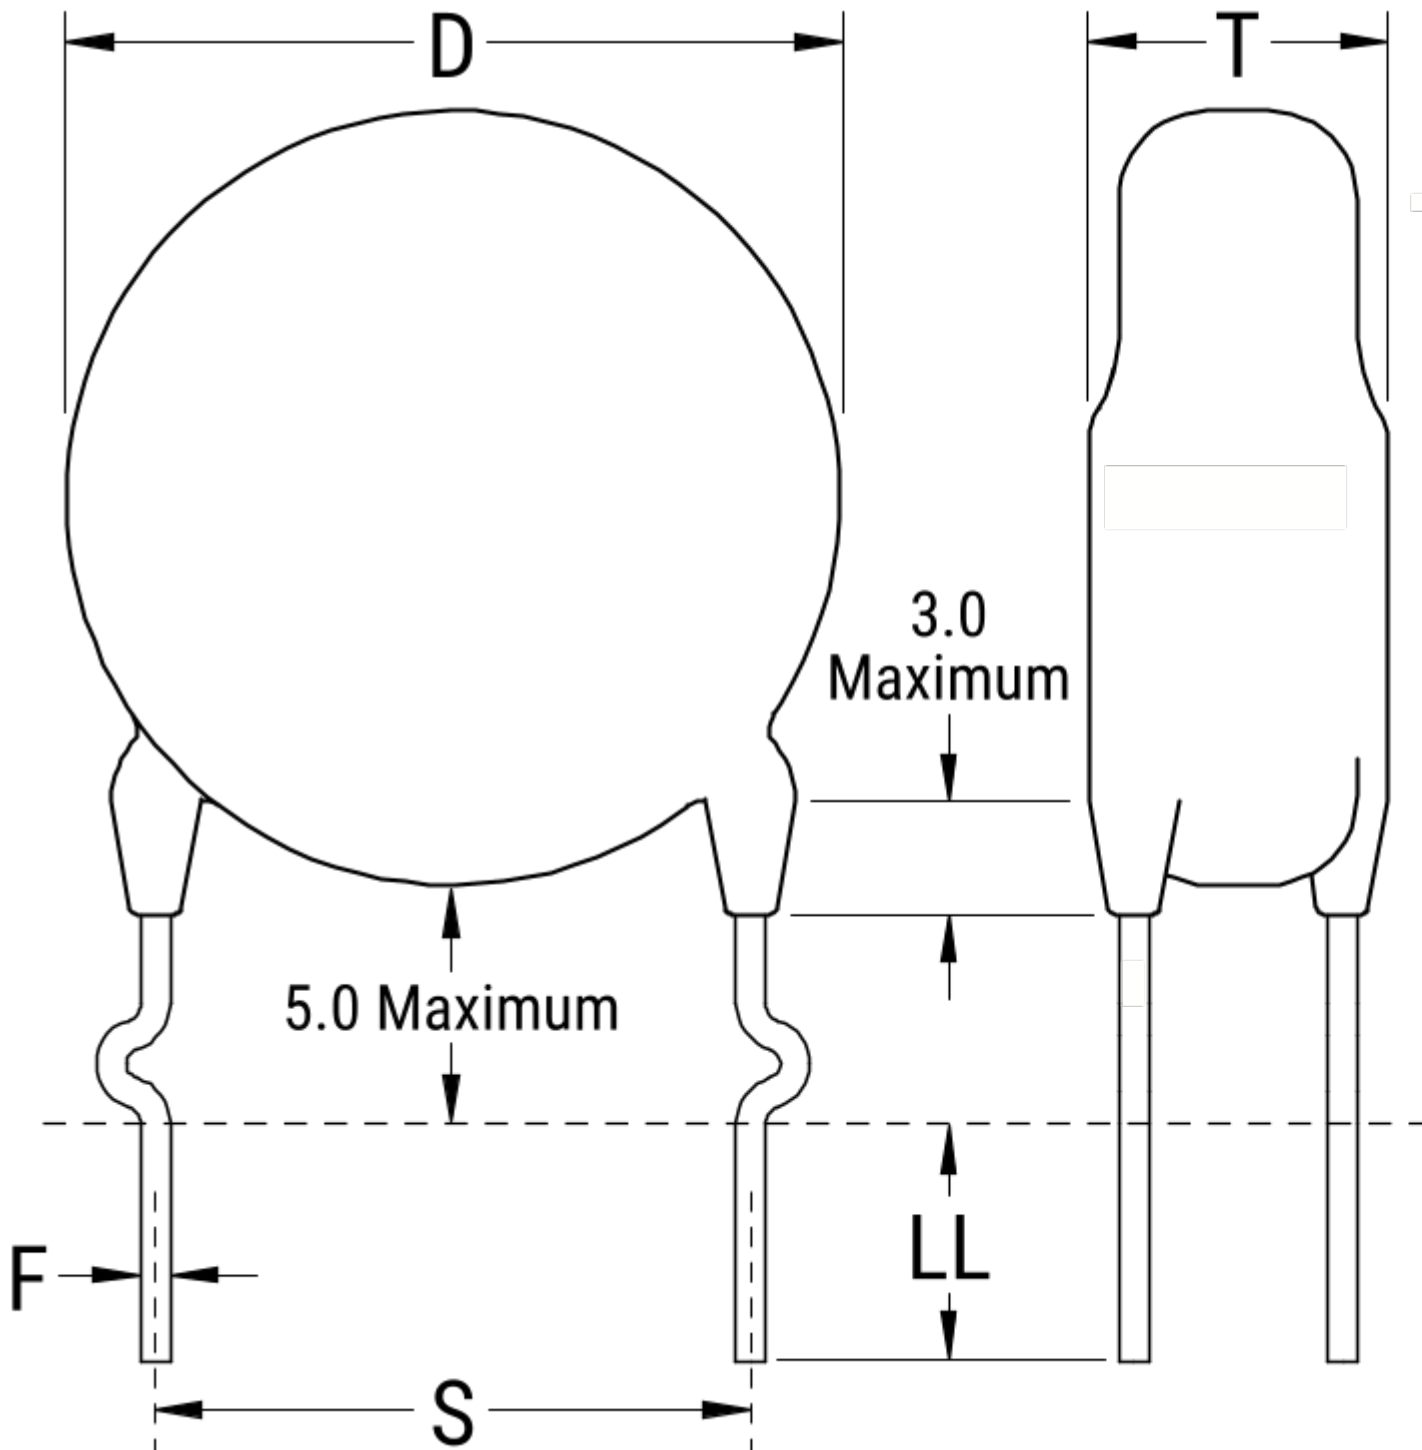

Click [here](#) for the 3D model.

### Dimensions

D 10mm MAX  
T 4.5mm MAX  
S 10mm NOM  
LL 5mm +/-1mm  
F 0.8mm +/-0.05mm  
A 6mm NOM  
V 1.6mm +/-0.5mm

### Packaging Specifications

Packaging Bulk, Bag

### General Information

Series ERK610 SFTY X1-440 Y2-300  
Style Radial Disc  
Description Ceramic Single Layer Safety Disc Capacitors  
RoHS Yes  
Termination Tin  
Qualifications UL, CSA, CAN, ENEC, VDE  
AEC-Q200 No

### Specifications

Capacitance 2200 pF  
Capacitance Tolerance 10%  
Voltage AC 440 VAC (X1), 300 VAC (Y2)  
Temperature Range -40/+125°C  
Temperature Coefficient Y5U  
Dissipation Factor 2.5%  
Insulation Resistance 6 GOhms  
Safety Class X1/Y2

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

Generated 5/18/2023 - 6a15cb63-0459-4c64-ba70-0fd59a795754

© 2006 - 2023 KEMET

Generated 5/18/2023 - 6a15cb63-0459-4c64-ba70-0fd59a795754

© 2006 - 2023 KEMET