



ANATECH ELECTRONICS, INC.

Manufacturer of RF & Microwave Products




60 MHz Band Pass Filter

Part Number: AE60B10368

Center Frequency:	60 MHz
Return Loss at Fc:	15 dB min
Relative BW (3dBc)	16 MHz
Insertion Loss (a tCF):	1.3 dB max
Rejection(at CF+/-40MHz)	40 dB min.
Impedance:	50 Ohm
Humidity:	Up to 95%
Operating Temperature:	-55°C to +85°C
Vibration(5to1000Hz)	10 G max.
Shockfor11msec:	30 G max.
Connector Type:	SMA (F)
Package Dimensions:	0.75"(H) X 1.00"(W) x 2.75"(L)

Outline Drawing:

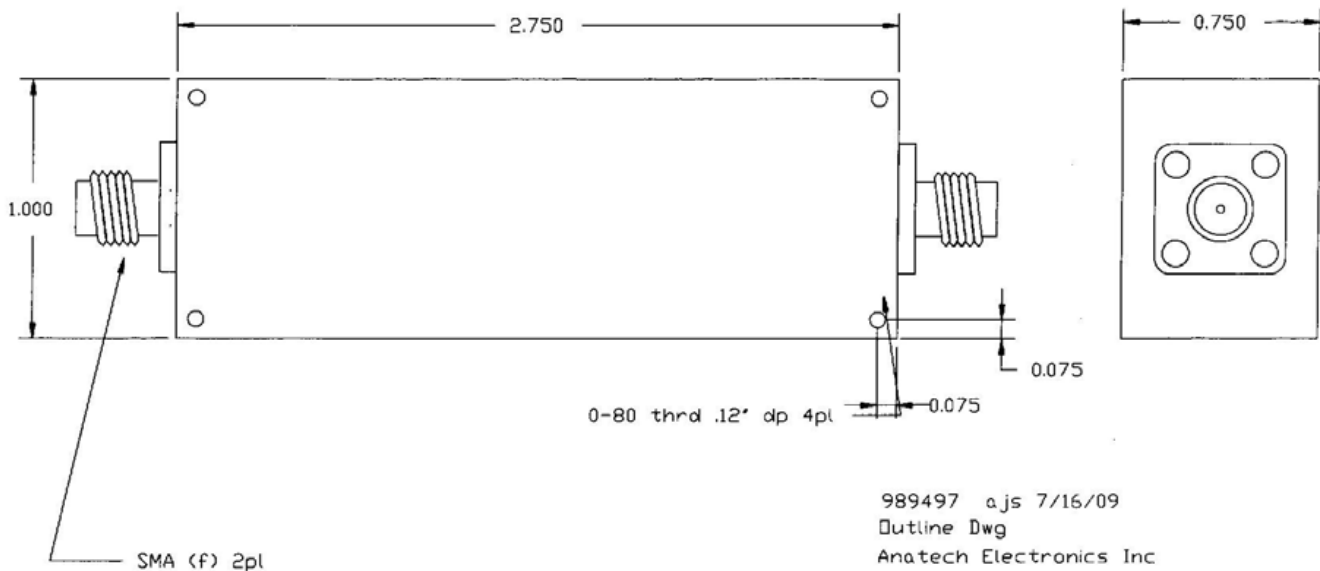

Tolerance: +/-0.01 inches [+/- 0.3mm]

Angles: +/- 1 Deg.

*Tolerance as shown unless otherwise specified in the datasheet electrical specification tables above.

*When max dimensions are called out the above tolerances do not apply as long as it is under the max call out.


ANATECH ELECTRONICS, INC., 70 Outwater Lane, Garfield, NJ 07026 Tel: (973) 772-4242 Fax: (973) 321-3941
E-Mail: sales@anatechelectronics.com Website: www.anatechelectronics.com



60 MHz Band Pass Filter

Part Number: AE60B10368

Simulation Plot:

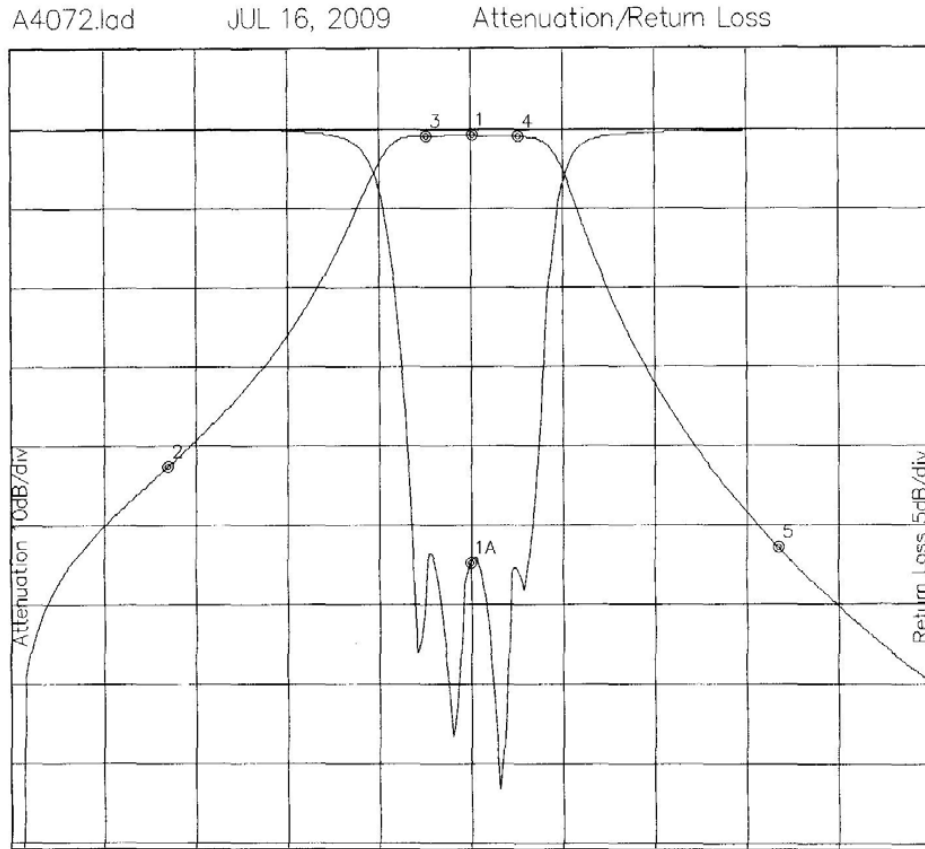

Attenuation Start: 0.012Hz Stop: 120.0MHz Return Loss Start: 0.012Hz Stop: 120.0MHz

- | | |
|---|---|
| Marker 1 Freq 60.097MHz Atten -0.758dB | Marker 1A Freq 59.903MHz Ret Loss -27.340dB |
| Marker 2 Freq 20.162MHz Atten -42.614dB | |
| Marker 3 Freq 54.087MHz Atten -0.808dB | |
| Marker 4 Freq 66.107MHz Atten -0.902dB | |
| Marker 5 Freq 100.03MHz Atten -52.916dB | |

Note: This is a simulation Plot. Actual response plot might differ once product is manufactured.