

W63RPC1 Series Rigid Embedded Dipole WiFi 6 Antenna

The ANT-W63RPC1 antenna delivers excellent WiFi/WLAN performance in the 2.4 GHz, 5 GHz and 6 GHz bands supporting both WiFi 6 and WiFi 6E.

The rigid W63RPC1 provides a ground plane independent dipole embedded antenna solution comparable in performance to an external antenna. The W63RPC1 antenna's adhesive backing makes it easy to mount in plastic enclosures, while allowing an environmentally sealed enclosure and protection from tampering or accidental antenna damage.

Connection is made to the radio via 1.13 mm coaxial cable terminated in a U.FL-type, MHF4-type or cut-cable, available in several lengths.



Features

- Rigid internal mounting
- 3M 9888T permanent adhesive backing
- Compact, low-profile
 - 42.0 mm x 11.0 mm x 1.3 mm
- Cable length options
 - 50 mm, 100 mm, 200 mm
- Termination options
 - U.FL-type (MHF1, AMC, UMCC)
 - MHF4-type
 - Cut cable for direct solder

Applications

- WiFi/WLAN coverage
 - WiFi 6E (802.11ax)
 - WiFi 6 (802.11ax)
 - WiFi 5 (802.11ac)
 - WiFi 4 (802.11n)
 - 802.11b/g
- 2.4 GHz ISM applications
 - Bluetooth®
 - ZigBee®
- U-NII bands 1-8
- Internet of Things (IoT) devices
- Smart Home networking
- Sensing and remote monitoring

Ordering Information

Part Number	Description
ANT-W63RPC1-UFL-50	WiFi 6 antenna with 50 mm (1.97 in) of 1.13 mm coaxial cable and U.FL-type plug (female socket)
ANT-W63RPC1-UFL-100	WiFi 6 antenna with 100 mm (3.94 in) of 1.13 mm coaxial cable and U.FL-type plug (female socket)
ANT-W63RPC1-UFL-200	WiFi 6 antenna with 200 mm (7.87 in) of 1.13 mm coaxial cable and U.FL-type plug (female socket)
ANT-W63RPC1-MHF4-50	WiFi 6 antenna with 50 mm (1.97 in) of 1.13 mm coaxial cable and MHF4-type plug (female socket)
ANT-W63RPC1-MHF4-100	WiFi 6 antenna with 100 mm (3.94 in) of 1.13 mm coaxial cable and MHF4-type plug (female socket)
ANT-W63RPC1-MHF4-200	WiFi 6 antenna with 200 mm (7.87 in) of 1.13 mm coaxial cable and MHF4-type plug (female socket)
ANT-W63RPC1-50	WiFi 6 antenna with 50 mm (1.97 in) of unterminated 1.13 mm coaxial cable
ANT-W63RPC1-100	WiFi 6 antenna with 100 mm (3.94 in) of unterminated 1.13 mm coaxial cable
ANT-W63RPC1-200	WiFi 6 antenna with 200 mm (7.87 in) of unterminated 1.13 mm coaxial cable

Available from LinX Technologies and select distributors and representatives.

Table 1. Electrical Specifications

W63RPC1	ISM/WiFi	WiFi/U-NII 1-4	WiFi 6E/U-NII 5-8
Frequency Range	2400 MHz to 2485 MHz	5150 MHz to 5850 MHz	5925 MHz to 7125 MHz
VSWR (max)	1.8	2.1	1.6
Peak Gain (dBi)	3.7	6.1	5.9
Average Gain (dBi)	-1.9	-1.9	-2.1
Efficiency (%)	69	69	66
Cross-Polar Discrimination Limit @ 360° beamwidth (dB)	> 22.5	> 6.0	> 6.0
Beamwidth for XPD > 15 dB	360°	300°	340°
Polarization	Linear	Impedance	50 Ω
Radiation	Omnidirectional	Max Power	5 W
Wavelength	1/2-wave	Electrical Type	Dipole
ESD Sensitivity	NOT ESD sensitive. As a best practice, Linx may use ESD packaging.		

Table 2. Mechanical Specifications

Part Number	Cable Length	Connection Type	Weight
ANT-W63RPC1-UFL-50	50 mm (1.97 in)	U.FL-type plug	1.4 g (0.05 oz)
ANT-W63RPC1-UFL-100	100 mm (3.94 in)	U.FL-type plug	1.6 g (0.06 oz)
ANT-W63RPC1-UFL-200	200 mm (7.87 in)	U.FL-type plug	1.9 g (0.07 oz)
ANT-W63RPC1-MHF4-50	50 mm (1.97 in)	MHF4-type plug	1.4 g (0.05 oz)
ANT-W63RPC1-MHF4-100	100 mm (3.94 in)	MHF4-type plug	1.5 g (0.05 oz)
ANT-W63RPC1-MHF4-200	200 mm (7.87 in)	MHF4-type plug	1.9 g (0.07 oz)
ANT-W63RPC1-50	50 mm (1.97 in)	cut-cable	1.3 g (0.05 oz)
ANT-W63RPC1-100	100 mm (3.94 in)	cut-cable	1.5 g (0.05 oz)
ANT-W63RPC1-200	200 mm (7.87 in)	cut-cable	1.8 g (0.06 oz)
Dimensions	Antenna element only, 43.0 mm x 11.0 mm x 1.3 mm (1.69 in x 0.43 in x 0.05 in)		
Operating Temp. Range	-40 °C to +85 °C		

Product Dimensions

Figure 1 shows the product dimensions for the W63RPC1 series antenna, cable and connector options available. The W63RPC1 series antenna is available with a U.FL-type, MHF4-type or cut-cable termination, with each termination option available in 50 mm, 100 mm or 200 mm cable length. The antenna is shown with a U.FL-type connector.

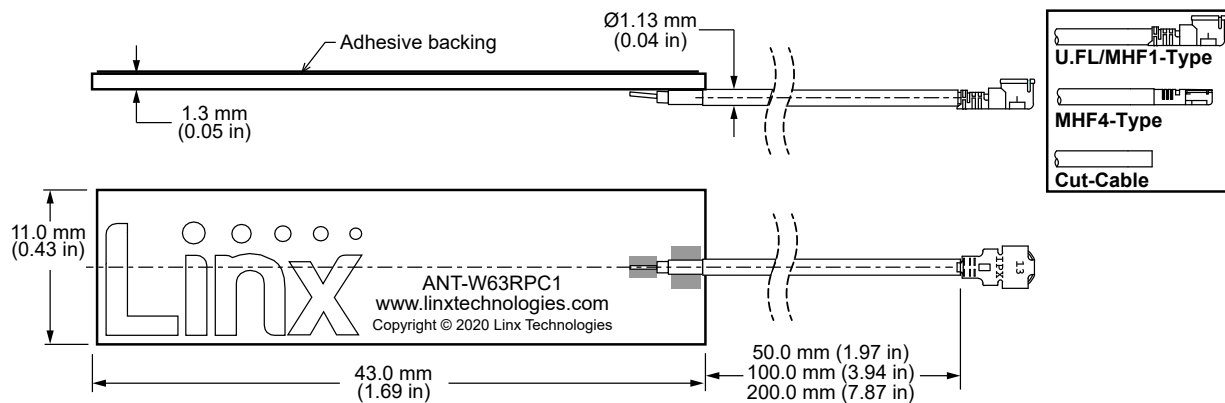


Figure 1. W63RPC1 Series Product Dimensions

VSWR

Figure 2 provides the voltage standing wave ratio (VSWR) across the antenna bandwidth. VSWR describes the power reflected from the antenna back to the radio. A lower VSWR value indicates better antenna performance at a given frequency. Reflected power is also shown on the right-side vertical axis as a gauge of the percentage of transmitter power reflected back from the antenna.

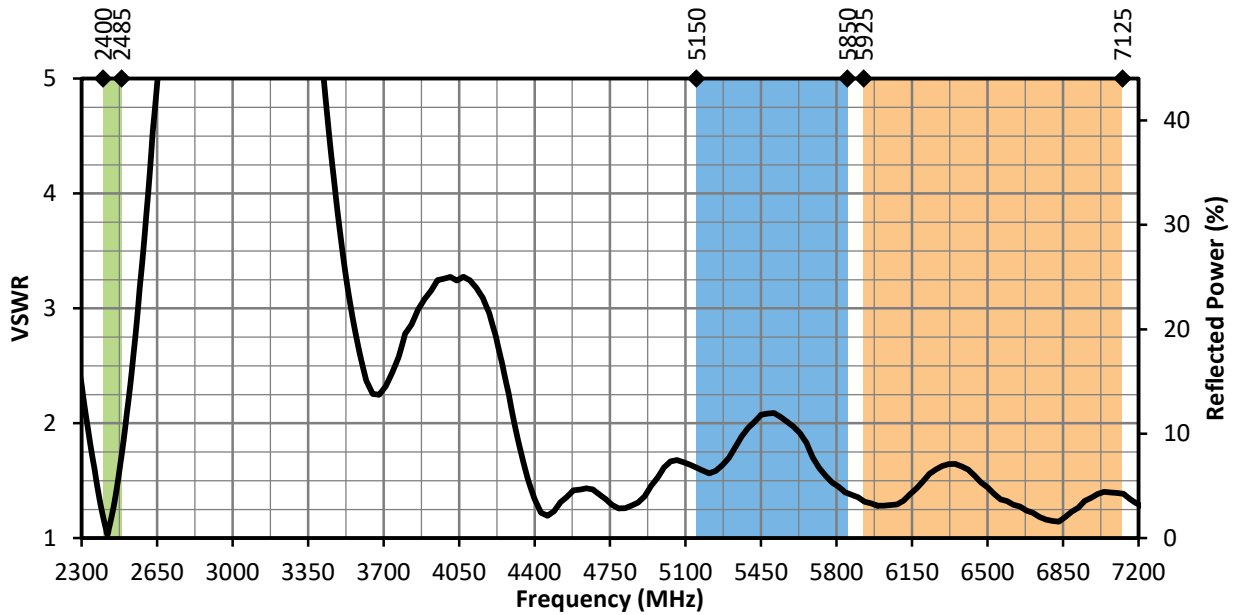


Figure 2. W63RPC1 VSWR with Frequency Band Highlights

Return Loss

Return loss (Figure 3), represents the loss in power at the antenna due to reflected signals. Like VSWR, a lower return loss value indicates better antenna performance at a given frequency.

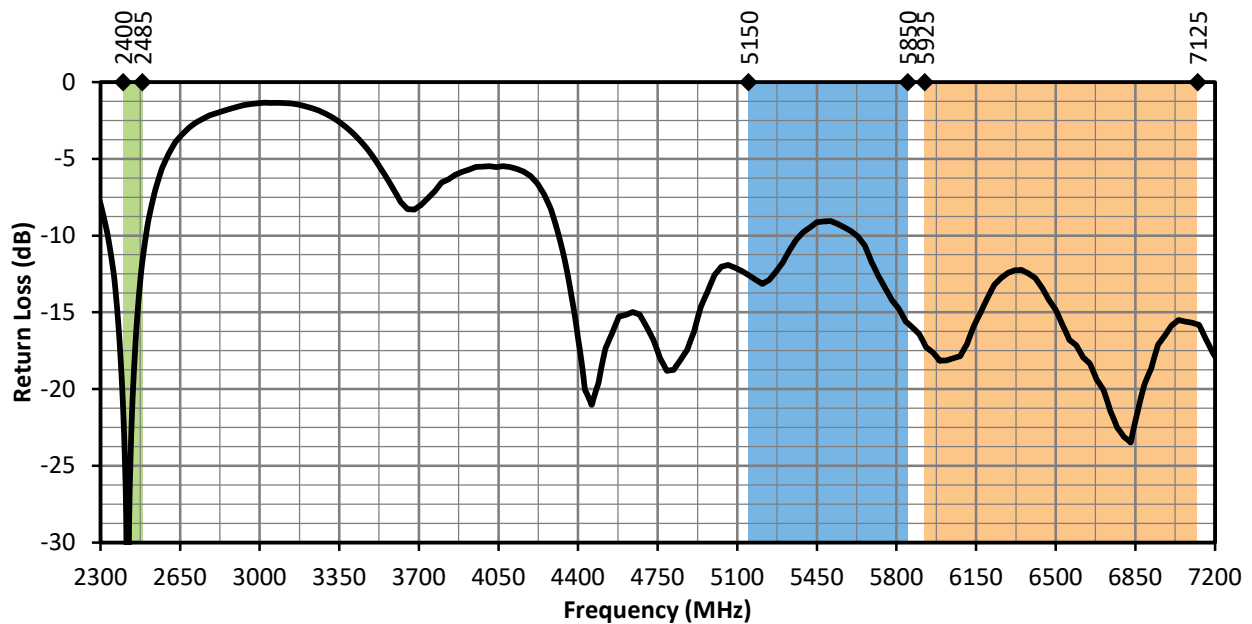


Figure 3. W63RPC1 Return Loss with Frequency Band Highlights

Peak Gain

The peak gain across the antenna bandwidth is shown in Figure 4. Peak gain represents the maximum antenna input power concentration across 3-dimensional space, and therefore peak performance at a given frequency, but does not consider any directionality in the gain pattern.

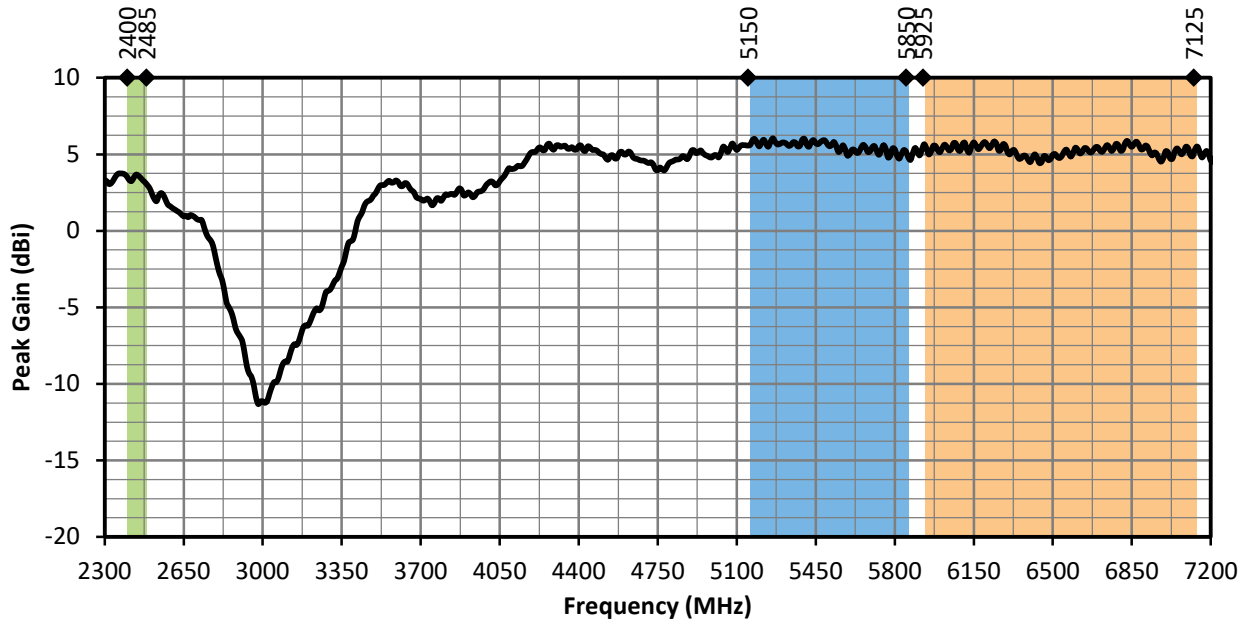


Figure 4. W63RPC1 Peak Gain with Frequency Band Highlights

Average Gain

Average gain (Figure 5), is the average of all antenna gain in 3-dimensional space at each frequency, providing an indication of overall performance without expressing antenna directionality.

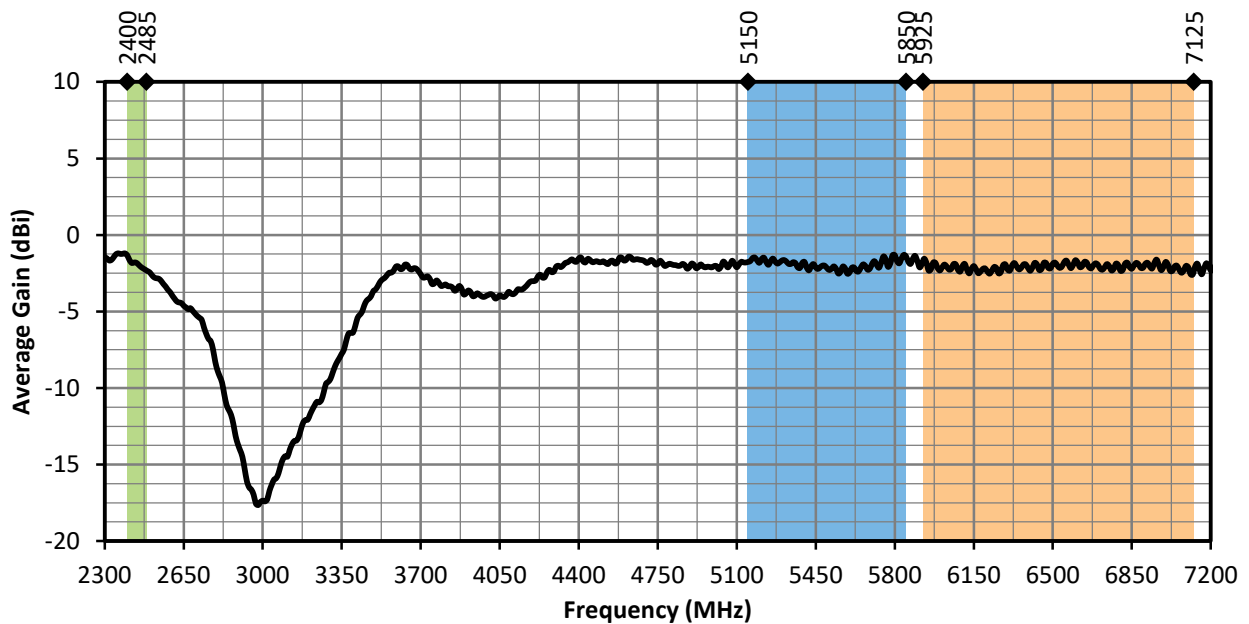


Figure 5. W63RPC1 Antenna Average Gain with Frequency Band Highlights

Radiation Efficiency

Radiation efficiency (Figure 6), shows the ratio of power delivered to the antenna relative to the power radiated at the antenna, expressed as a percentage, where a higher percentage indicates better performance at a given frequency.

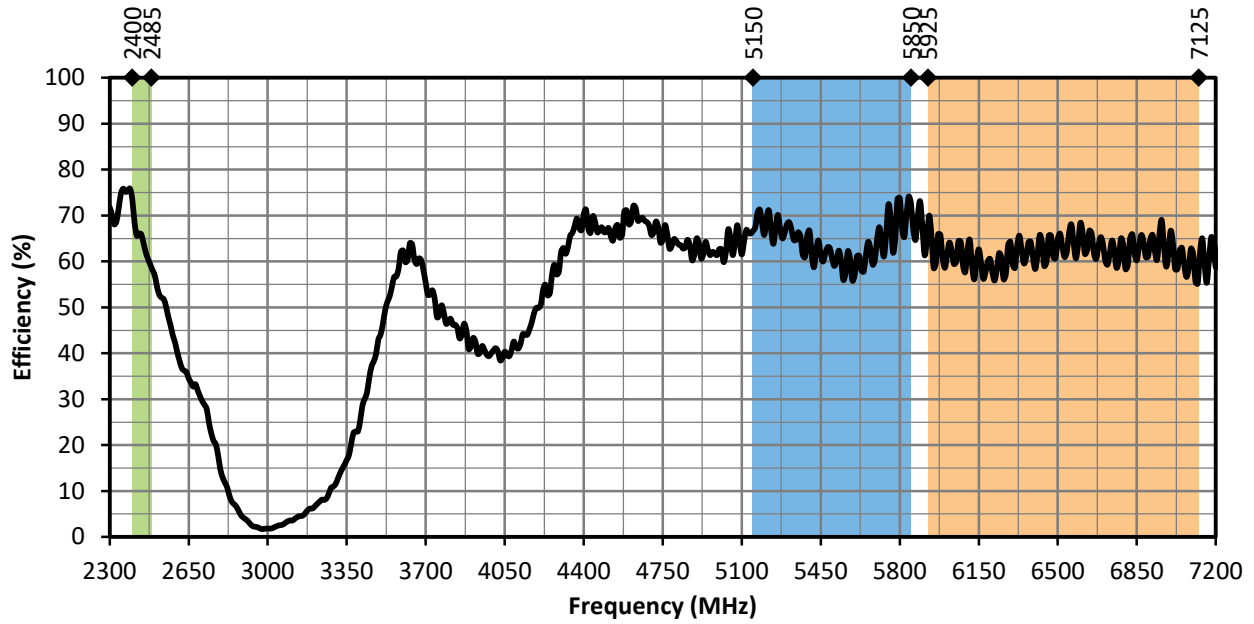



Figure 6. W63RPC1 Antenna Radiation Efficiency with Frequency Band Highlights

Radiation Patterns


Radiation patterns provide information about the directionality and 3-dimensional gain performance of the antenna by plotting gain at specific frequencies in three orthogonal planes. Antenna radiation patterns are shown in Figure 7 using polar plots covering 360 degrees. The antenna graphic at the top of the page provides reference to the plane of the column of plots below it. Note: when viewed with typical PDF viewing software, zooming into radiation patterns is possible to reveal fine detail.



XZ-Plane Gain

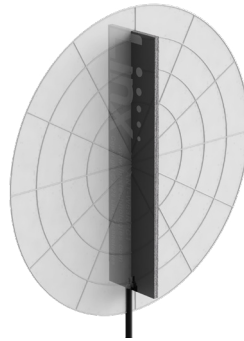


YZ-Plane Gain

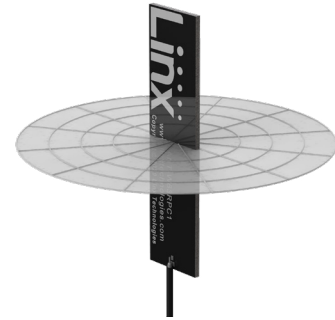


XY-Plane Gain


2400 MHz to 2485 MHz (2450 MHz)

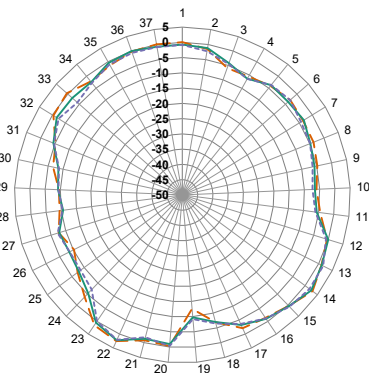

XZ-Plane Gain

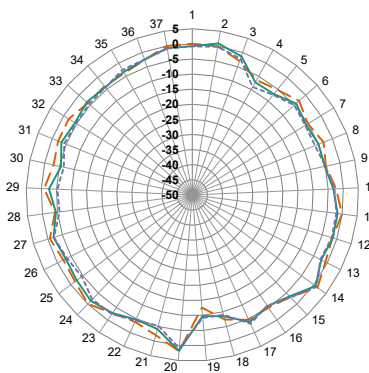


YZ-Plane Gain

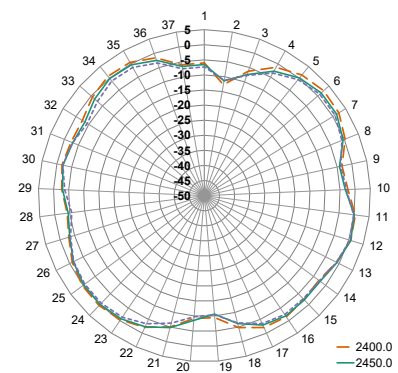


XY-Plane Gain

— 2400.0
— 2450.0
- - - 2490.0


5150 MHz to 5850 MHz (5500 MHz)

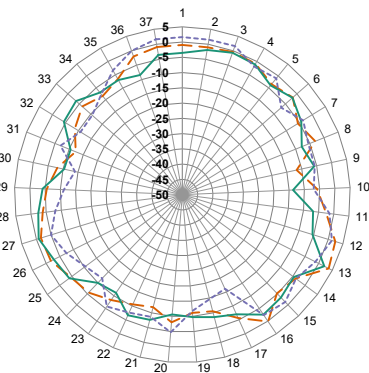

XZ-Plane Gain

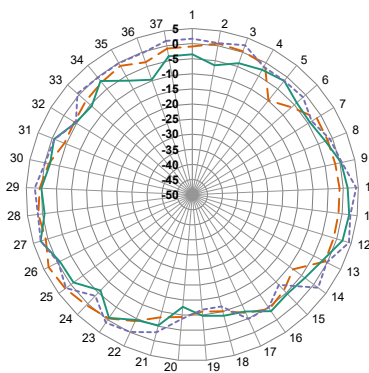

YZ-Plane Gain

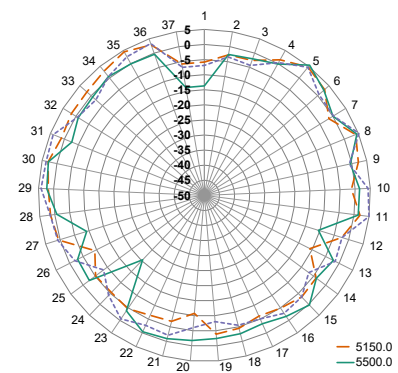

XY-Plane Gain

— 5150.0
— 5500.0
- - - 5850.0

Radiation Patterns

5925 MHz to 7125 MHz (6530 MHz)

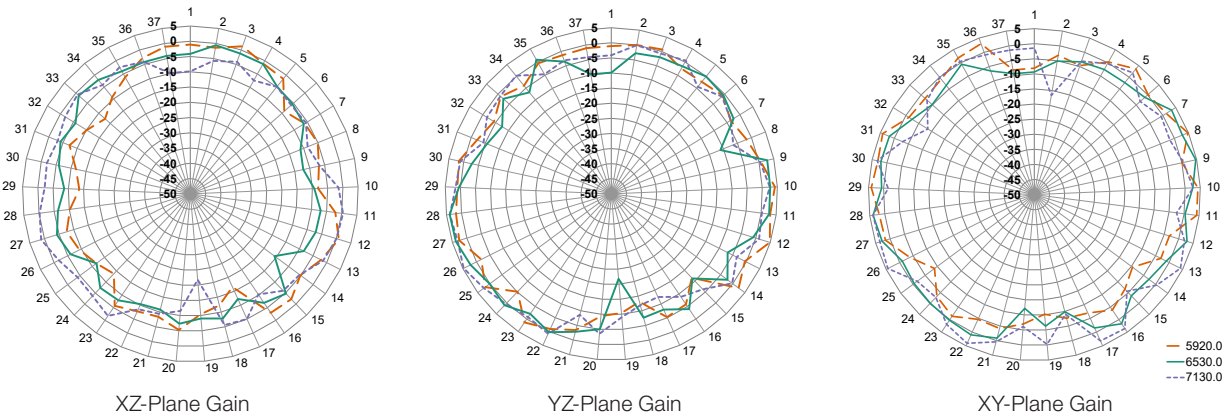


Figure 7. W63RPC1 Radiation Patterns

Antenna Mounting

The W63RPC1 is an adhesive backed, embedded antenna that allows it to be permanently installed onto a wide variety of materials. The adhesive backing is 3M 9888T, which provides outstanding adhesion to low surface energy plastics.

- 3M 9888T features a medium-soft acrylic pressure sensitive adhesive system. The key characteristics of this adhesive include a combination of high initial adhesion and good shear and bonding power to a wide variety of materials, including many plastics including polyethylene and polypropylene.
- 3M 9888T is UL-recognized (File MH28421). Please see UL listing for details.

Packaging Information

The W63RPC1 series antenna is individually sealed in a clear plastic bag. Individual packages are sealed in a bag of 100. Distribution channels may offer alternative packaging options.

Website: <http://linxtechnologies.com>
Linx Offices: 159 Ort Lane, Merlin, OR, US 97532
Phone: +1 (541) 471-6256
E-MAIL: info@linxtechnologies.com

Linx Technologies reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Wireless Made Simple is a registered trademark of Linx Acquisitions LLC. Bluetooth is a registered trademark of Bluetooth SIG, Inc. ZigBee is a registered trademark of ZigBee Alliance, Inc. Other product and brand names may be trademarks or registered trademarks of their respective owners.

Copyright © 2020 Linx Technologies

All Rights Reserved

Doc# DS20318-88ANT

