


③ TESTING CONDITIONS:

1. VOLTAGE: 300V DC/0.01S.
2. INSULATION RESISTANCE: 10MΩ Min.
3. CONDUCTIVE RESISTANCE: 5Ω Max.
4. 100% OPEN AND SHORT ELECTRICAL TEST.

Waterproof rate:IP67

WIRE LIST

P1	PAIR	COLOR	
1	—	RED(24AWG)	OPEN
2	XX	WHITE(28AWG)	
3	XX	GREEN(28AWG)	
4	—	BLACK(24AWG)	
SHELL	—	DRAIN	

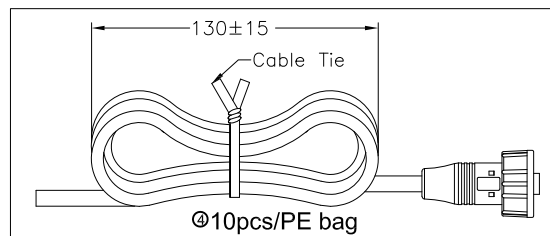

③ ITEM	SPECIFICATION	QTY	UNIT
⑤	CAP, BLACK Nylon+30%GF UL94V-0	6	G
④	Gasket EDPM Black UL94V-0	1	PCS
③	ABS 94V-0 BLACK 13/16" -28UN SHELL	10	G
②	USB A/M CONNECTOR SOLDER	1	SET
①	USB 2.0 28AWG*1P+24AWG*2C+AL.MY+D+B JACKET BLACK PVC OD=5.0±0.2mm (UV RESISTANT)	1	PCS

RoHS compliant
Unit: mm

Scale	Free					Date	Name	Customer-No.
TOLERANCE						19.01.2004	Hellwig	ASSMANN WSW-No. A-KAB-USBA-MS-1M
±0.5								
		④	Update the packing	22.05.2019	Segal	Approved	22.05.2019	Drawing-No. ASS 1578 CA
		③	Cancel "A" logo Add testing conditions and table list	03.04.2018	Amy			
		②	Update	07.07.2009	Dean			rev04
		①	Drawn	19.01.2004	Hellwig			
		Id.	Modification	Date	Name			Sheet



Customer-No.	
ASSMANN WSW-No.	A-KAB-USBA-MS-1M
Drawing-No.	ASS 1578 CA
Replace	Sheet

1

2

3

4

5

6

7