


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)

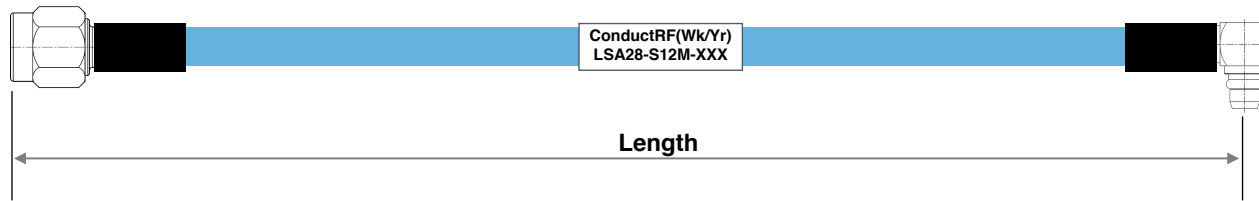


Part No. Configurator - XXX

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

ConductRF # (XXX)	Length	Max. Insertion Loss(dB)	
		3GHz	6GHz
S06	6"	0.36	0.51
S12	12"	0.59	0.84
S18	18"	0.81	1.17
VSWR Max.		1.35:1	

5	Strain Relief	Shrink Tube	Black
4	Label	Shrink Tube	White
3	Flexible Sprial w. Coax	A28SS	Blue FEP
2	MMCX R/A Male	MMM21C-A28G01	Gold
1	SMA Straight Male	PSM12B-A28G01	Pass. SS
ITEM	DESCRIPTION	MATERIALS	FINISH

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: <b>Flex Low Loss SMA Male to MMCX R/A Male</b>				
2	Updated Lengths & MMCX		DG	05/01/20	Remarks: 035/035/10	Originated: 01/29/19	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: LSA		Sheet 1 of 1
1	Pre-Release		DG	01/29/19				Dwg Ref: LSA28-S12M		
REVISION HISTORY					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: <b>2</b>		Part No: <b>LSA28-S12M-XXX</b>