



LED Corncob Bulb

KB Series



KB Series


Beyond LED Technology's KB Series Corncob High wattage LED retrofits are designed to reduce the power consumed, in fixtures traditionally used with metal halide or high-pressure sodium lamps, while still producing a high Lumen output. This 2020 version is the smallest, and shortest of its kind to fit such a wide range of fixtures. Suitable for use in enclosed fixtures, these high output LEDs are an excellent choice for post top lights, shoebox fixtures, and other HID fixtures.

- Up to 140 lumens per watt
- High-reliability internal driver
- Universal 100-277Vac
- Can safely be used in enclosed fixtures

LED Corncob Bulb

KB Series


SKU #	Model #	Base	Watts	Lumens	CCT	Input Voltage	IP	Certifications
151359	BLT-CLW07E-012WXYA1-acK	E26	12W	1740Lm	5000K	100-277Vac	IP65	UL
151232	BLT-CLW07E-027WXYA1-abck	E26	27W	3915Lm	5000K	100-277Vac	IP65	UL
151361	BLT-CLW07E-036WXYA1-acK	E26	36W	5220Lm	5000K	100-277Vac	IP65	UL
151362	BLT-CLW07E-045WXYA1-acK	EX39	45W	6525Lm	5000K	100-277Vac	IP65	UL & DLC
151363	BLT-CLW07E-054WXYA1-acK	EX39	54W	8100Lm	5000K	100-277Vac	IP65	UL & DLC
151365	BLT-CLW07E-080WXYA1-acK	EX39	80W	11600Lm	5000K	100-277Vac	IP65	UL & DLC
151366	BLT-CLW07E-100WXYA1-acK	EX39	100W	14500Lm	5000K	100-277Vac	IP65	UL & DLC
151225	BLT-CLW07E-120WXYA1-acK	EX39	120W	17400Lm	5000K	100-277Vac	IP65	UL & DLC
106534	BLTCLW150W57K	E39/E40	150W	18000Lm	5700K	100-277Vac	IP64	UL & DLC
151013	BLT-CLW03-200WAC1-E-50K	E39	200W	26000Lm	5000K	100-277Vac	IP64	UL

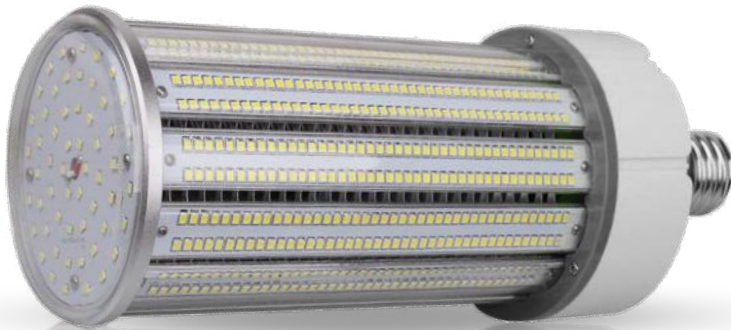

E26 Base




EX39 Base



E39/E40 Base

CORRELATED COLOR TEMPERATURE (CCT)

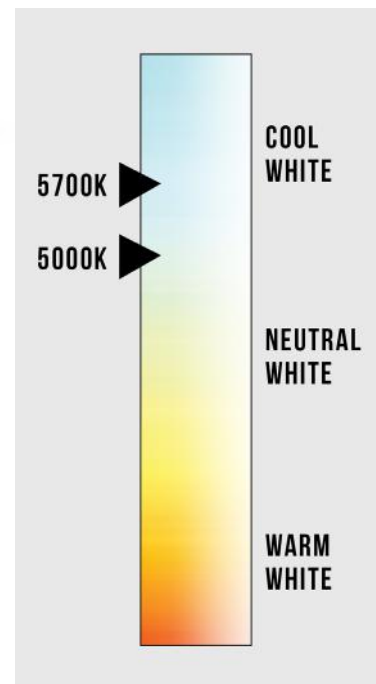

(866) 786-1117 • www.BeyondLEDTechnology.com

Due to continuous product improvement, information in this document is subject to change.




LED Corncob Bulb

KB Series

Dimensions

12W - E26


27W - E26

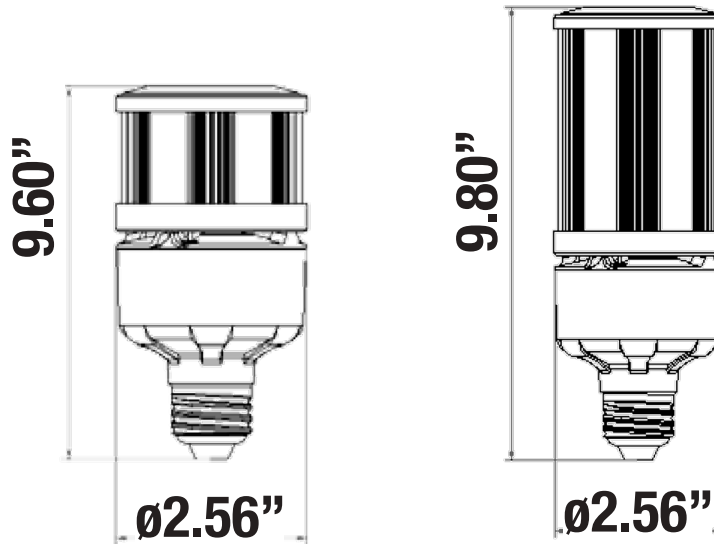

36W - E26

45W - EX39

54W - EX39

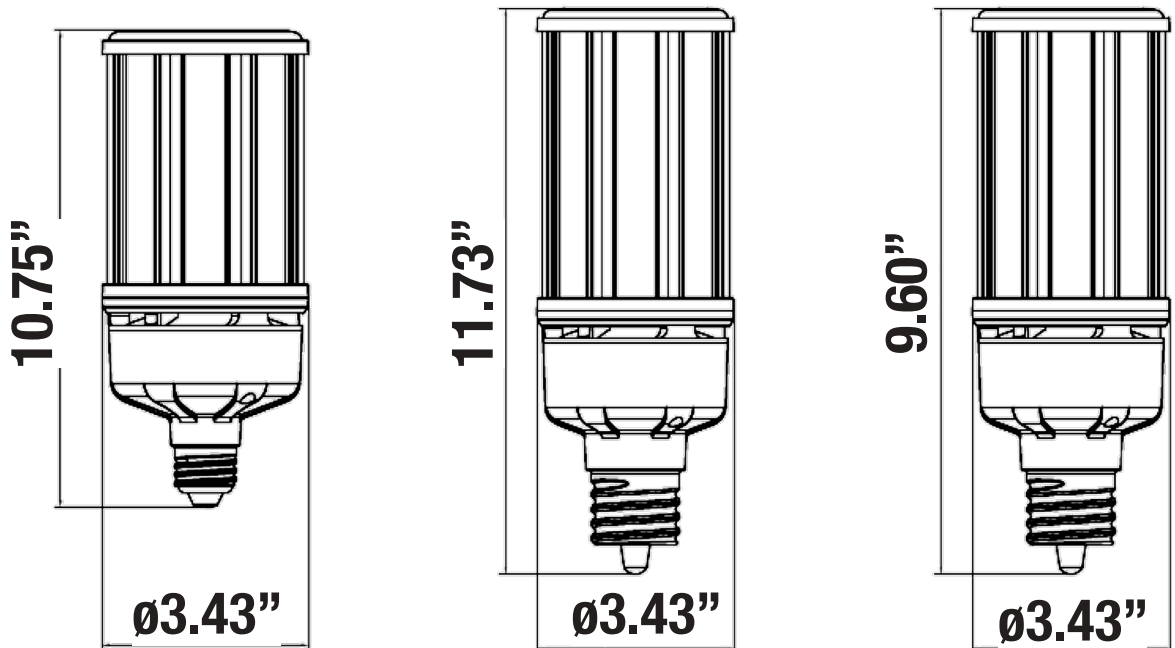


LED Corncob Bulb


KB Series

Dimensions


80W - EX39

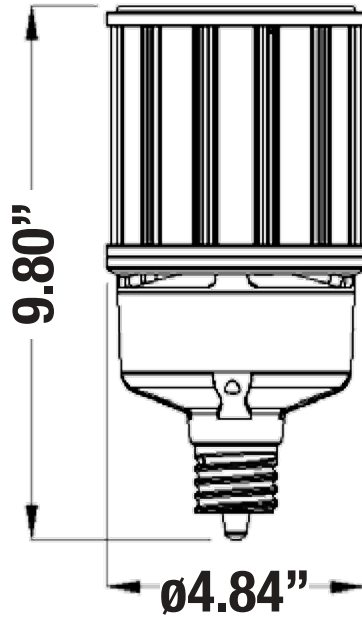


100W - EX39

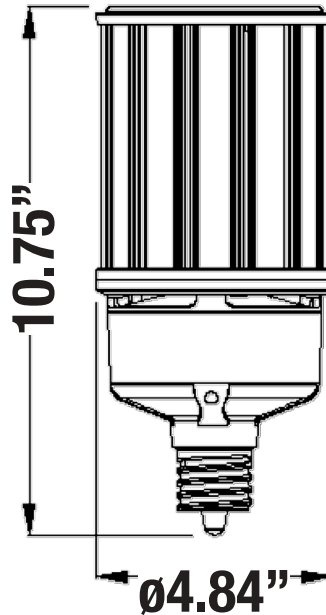


120W - EX39

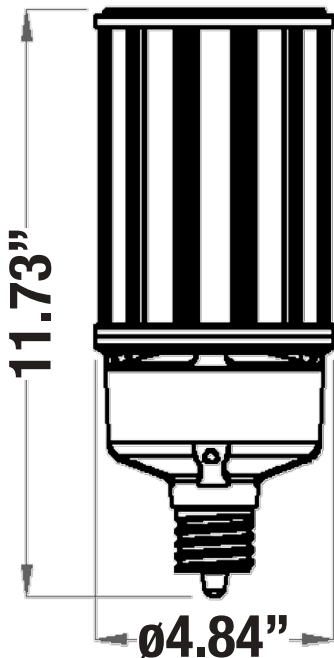

150W - E39/E40

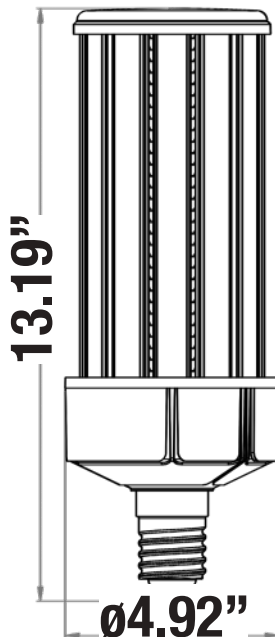

200W - E39

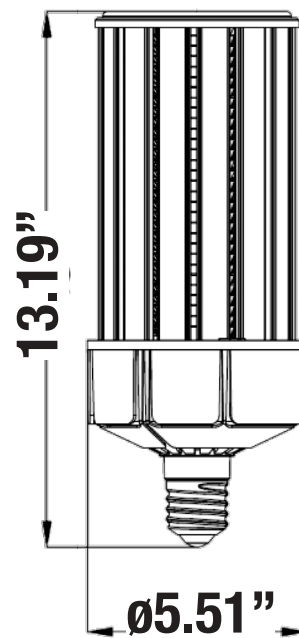

(866) 786-1117 • www.BeyondLEDTechnology.com

Due to continuous product improvement, information in this document is subject to change.



LED Corncob Bulb

KB Series


12W - Specifications

OPTICAL	Input Power	12W
	Lumen	1620-1740 LM (Clear) / 1440-1560 LM (Frosted)
	Lumen Efficacy	135-145LM/W (Clear) / 120-130 LM/W (Frosted)
	Color Temperature	5000K
	CRI	>80
	Viewing Angle	360 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Equivalent	30W CFL, 50W MHL/HPS/HID
MATERIALS	LED Brand	Lumileds /SAMSUNG
	LED Type	SMD2835
	LED QTY	40 PCS
	Housing	PC + Aluminum
	Waterproof Rating	IP65
OTHERS	Operating Temperature	-40°F to 113°F
	Operating Humidity	20%-70% RH
	Storage Temperature	-40°F to 176°F
	Storage Humidity	10%-75% RH
	Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151359	BLT-CLW07E-012WX YA1-acK	1	7" X 3" X 3"	1 Lb			

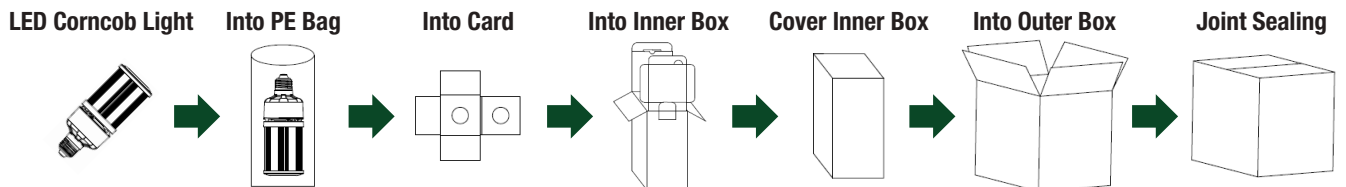



LED Corncob Bulb

KB Series


Distribution Diagram

Remark: The testing data comes directly from the product test.

DATA OF LAMP		PHOTOMETRIC DATA Eff: 139.84 lm/W			
MODEL		I _{max} (cd)	173.7	S/MH (C0/180)	2.05
NOMINAL POWER (W)	12	LOR (%)	100.0	S/MH (C90/270)	1.96
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1535.2	η UP, DN (C0-180)	19.3, 30.1
NOMINAL FLUX (lm)	1535.21	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	20.3, 30.3
LAMPS INSIDE	1	η up (%)	39.6	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120	η down (%)	60.4	CIBSE SHR MAX	0.00

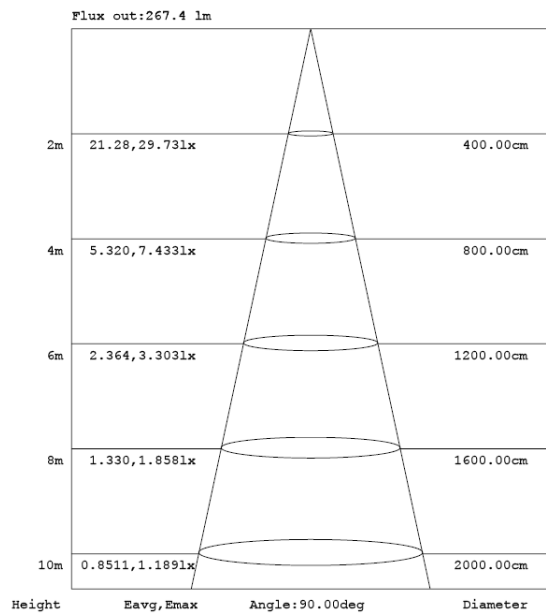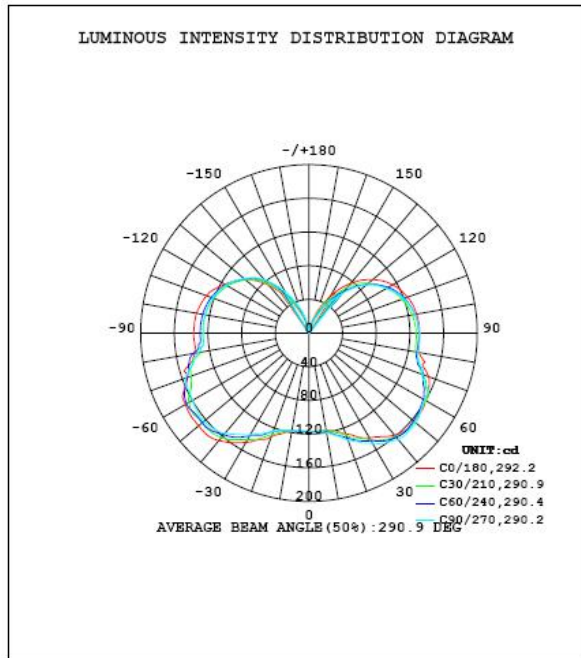

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

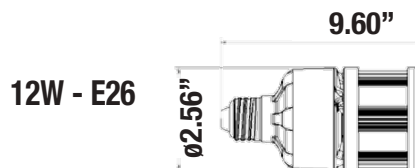



LED Corncob Bulb

KB Series


27W - Specifications

OPTICAL	Input Power	27W
	Lumen	3645-3915 LM (Clear) / 3240-3510 LM (Frosted)
	Lumen Efficacy	135-145LM/W (Clear) / 120-130 LM/W (Frosted)
	Color Temperature	5000K
	CRI	>80
	Viewing Angle	360 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Equivalent	60W CFL, 100W MHL/HPS/HID
MATERIALS	LED Brand	Lumileds /SAMSUNG
	LED Type	SMD2835
	LED QTY	98PCS
	Housing	PC + Aluminum
	Waterproof Rating	IP65
OTHERS	Operating Temperature	-40°F to 113°F
	Operating Humidity	20%-70% RH
	Storage Temperature	-40°F to 176°F
	Storage Humidity	10%-75% RH
	Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151232	BLT-CLW07E-027WXYA1-abcK	1	9" X 3" X 3"	1 Lb			

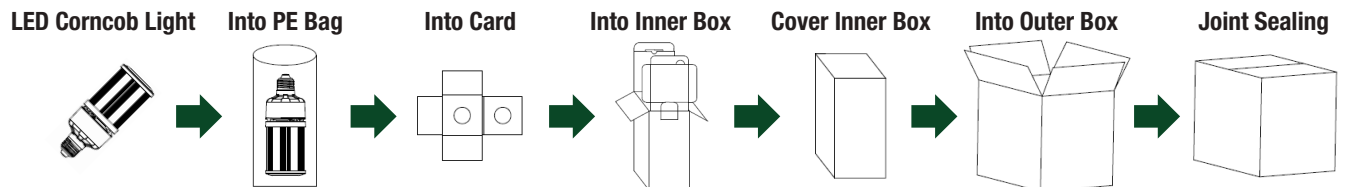



LED Corncob Bulb

KB Series


Distribution Diagram

Remark: The testing data comes directly from the product test.

DATA OF LAMP		PHOTOMETRIC DATA Eff: 140.36 lm/W			
MODEL		I _{max} (cd)	392.7	S/MH (C0/180)	2.50
NOMINAL POWER (W)	27	LOR (%)	100.0	S/MH (C90/270)	2.47
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	3718.7	η UP, DN (C0-180)	21.4, 28.6
NOMINAL FLUX (lm)	3718.68	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	21.9, 28.1
LAMPS INSIDE	1	η up (%)	43.3	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120	η down (%)	56.7	CIBSE SHR MAX	0.00

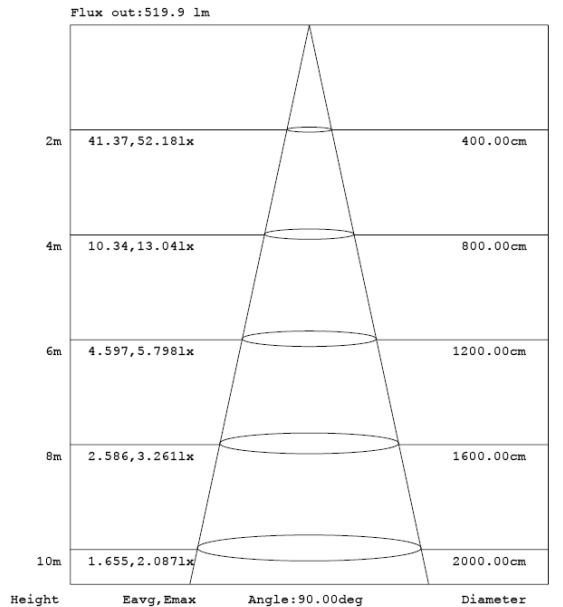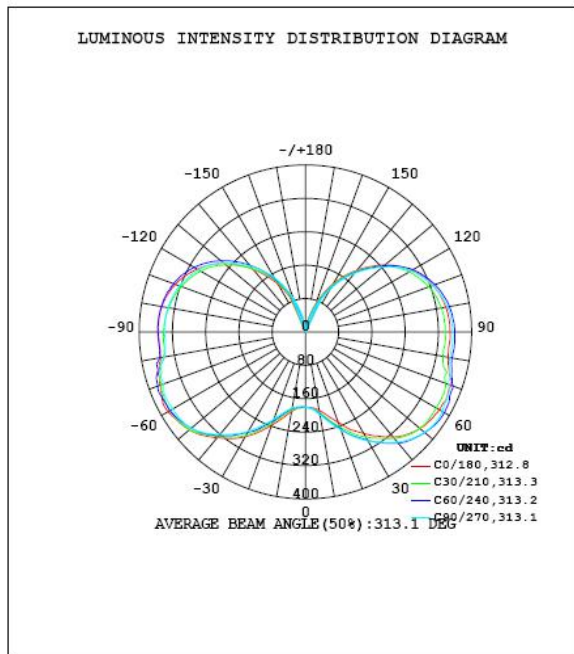

27W - E26



(866) 786-1117 • www.BeyondLEDTechnology.com

Due to continuous product improvement, information in this document is subject to change.



LED Corncob Bulb

KB Series


36W - Specifications

OPTICAL	Input Power	36W
	Lumen	4860-5220LM (Clear) / 4320-4680LM (Frosted)
	Lumen Efficacy	135-145 LM/W (Clear) / 120-130 LM/W (Frosted)
	Color Temperature	5000K
	CRI	>80
	Viewing Angle	360 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Equivalent	80W CFL, 150W MHL/HPS/HID
MATERIALS	LED Brand	Lumileds /SAMSUNG
	LED Type	SMD2835
	LED QTY	108 PCS
	Housing	PC + Aluminum
	Waterproof Rating	IP65
OTHERS	Operating Temperature	-40°F to 113°F
	Operating Humidity	20%-70% RH
	Storage Temperature	-40°F to 176°F
	Storage Humidity	10%-75% RH
	Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151361	BLT-CLW07E-036WXYA1-acK	1	10" X 4" X 4"	2 Lb			

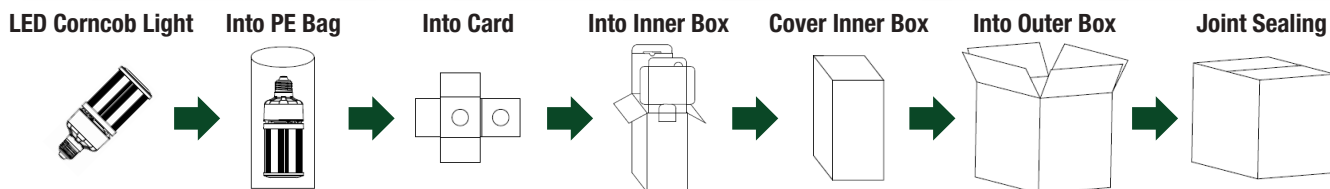



LED Corncob Bulb

KB Series


Distribution Diagram

Remark: The testing data comes directly from the product test.

DATA OF LAMP		PHOTOMETRIC DATA Eff: 140.32 lm/W			
MODEL		I _{max} (cd)	522.0	S/MH (C0/180)	2.66
NOMINAL POWER (W)	36	LOR (%)	100.0	S/MH (C90/270)	2.67
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	4960.6	η UP, DN (C0-180)	23.0, 27.4
NOMINAL FLUX (lm)	4960.61	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	21.9, 27.7
LAMPS INSIDE	1	η up (%)	44.9	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120	η down (%)	55.1	CIBSE SHR MAX	0.00

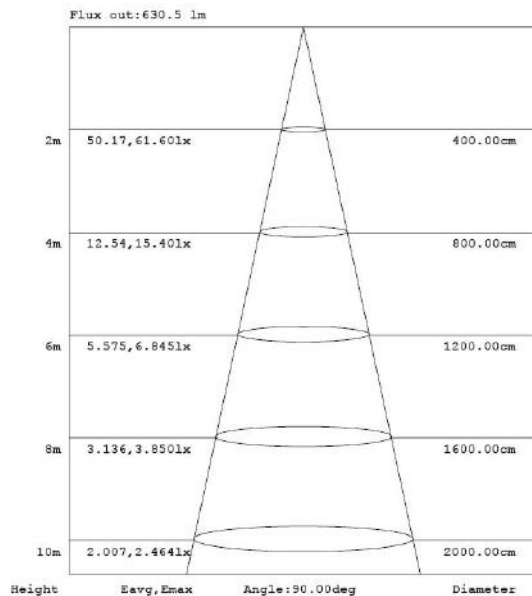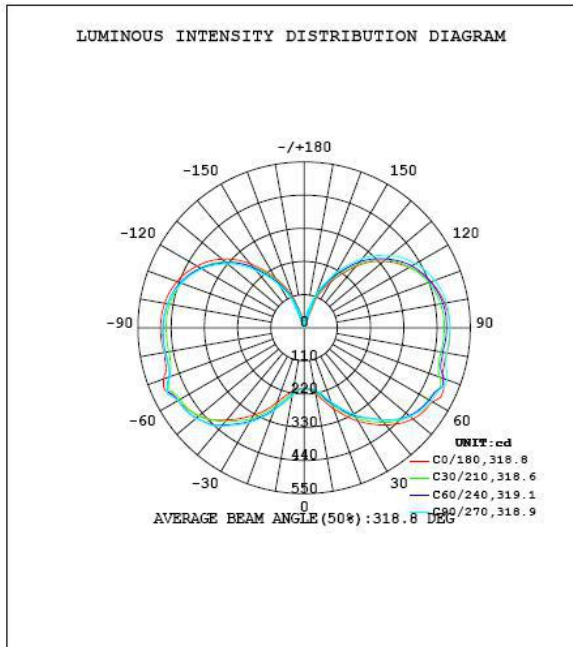

36W - E26

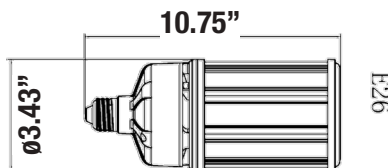

(866) 786-1117 • www.BeyondLEDTechnology.com

Due to continuous product improvement, information in this document is subject to change.



LED Corncob Bulb

KB Series


45W - Specifications

OPTICAL	Input Power	45W
	Lumen	6075-6525LM (Clear) / 5400-5850LM (Frosted)
	Lumen Efficacy	135-145 LM/W (Clear) / 120-130 LM/W (Frosted)
	Color Temperature	5000K
	CRI	>80
	Viewing Angle	360 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Equivalent	100W CFL, 150W MHL/HPS/HID
MATERIALS	LED Brand	Lumileds /SAMSUNG
	LED Type	SMD2835
	LED QTY	135 PCS
	Housing	PC + Aluminum
	Waterproof Rating	IP65
OTHERS	Operating Temperature	-40°F to 113°F
	Operating Humidity	20%-70% RH
	Storage Temperature	-40°F to 176°F
	Storage Humidity	10%-75% RH
	Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151362	BLT-CLW07E-045WXYA1-acK	1	11" X 4" X 4"	2 Lb			

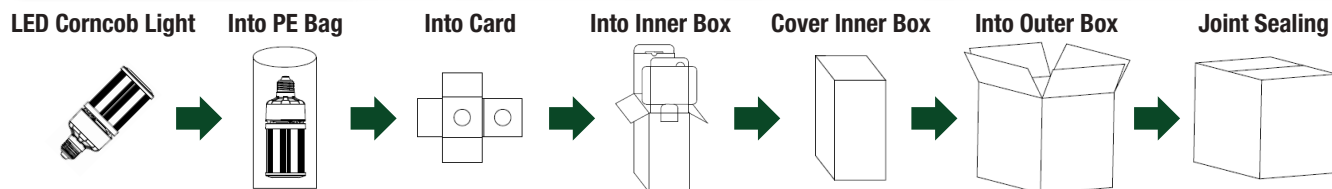




LED Corncob Bulb

KB Series

Distribution Diagram

Remark: The testing data comes directly from the product test.

DATA OF LAMP		PHOTOMETRIC DATA Eff: 141.92 lm/W			
MODEL		I _{max} (cd)	665.5	S/MH (C0/180)	2.66
NOMINAL POWER (W)	45	LOR (%)	100.0	S/MH (C90/270)	2.66
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	6327.6	η UP, DN (C0-180)	23.1, 27.3
NOMINAL FLUX (lm)	6327.56	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	21.7, 27.9
LAMPS INSIDE	1	η up (%)	44.8	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120	η down (%)	55.2	CIBSE SHR MAX	0.00

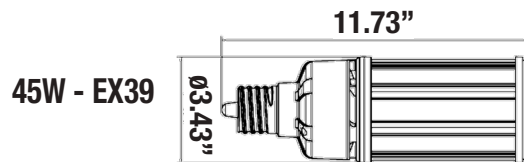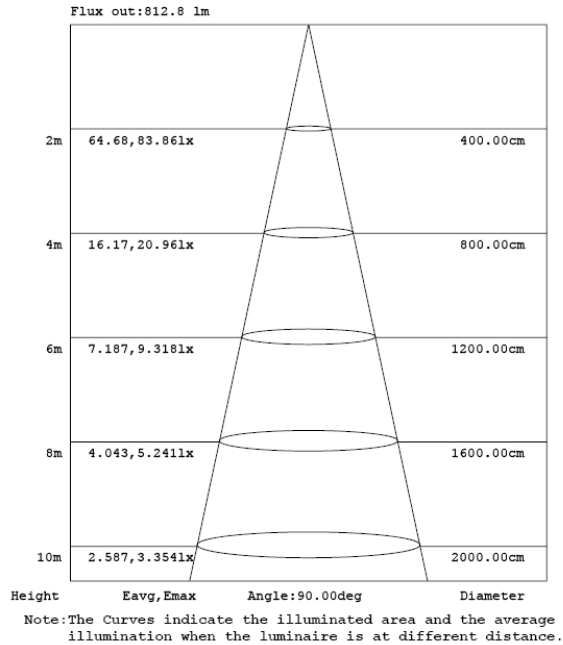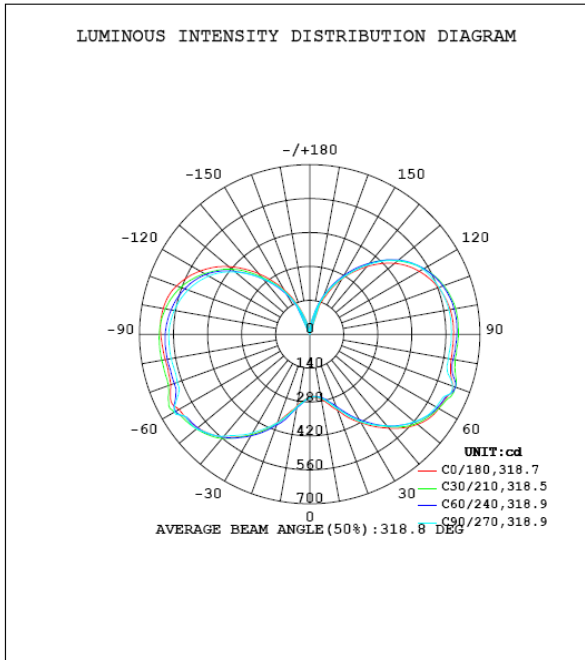



LED Corncob Bulb

KB Series


54W - Specifications

OPTICAL	Input Power	54W
	Lumen	7290-8100LM (Clear) / 6480-7020LM (Frosted)
	Lumen Efficacy	135-145 LM/W (Clear) / 120-130 LM/W (Frosted)
	Color Temperature	5000K
	CRI	>80
	Viewing Angle	360 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Equivalent	100W CFL, 150W MHL/HPS/HID
MATERIALS	LED Brand	Lumileds /SAMSUNG
	LED Type	SMD2835
	LED QTY	162 PCS
	Housing	PC + Aluminum
	Waterproof Rating	IP65
OTHERS	Operating Temperature	-40°F to 113°F
	Operating Humidity	20%-70% RH
	Storage Temperature	-40°F to 176°F
	Storage Humidity	10%-75% RH
	Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151363	BLT-CLW07E-054WXYA1-acK	1	11" X 4" X 4"	2 Lb			

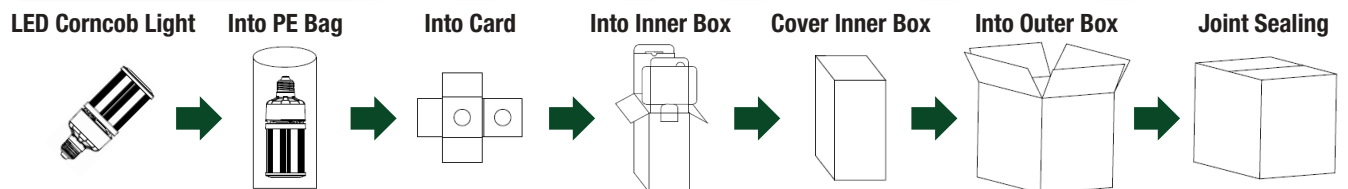




LED Corncob Bulb

KB Series

Distribution Diagram

Remark: The testing data comes directly from the product test.

DATA OF LAMP		PHOTOMETRIC DATA Eff: 144.69 lm/W			
MODEL		I _{max} (cd)	793.8	S/MH (C0/180)	2.65
NOMINAL POWER (W)	54	LOR (%)	100.0	S/MH (C90/270)	2.65
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	7546.1	η UP, DN (C0-180)	21.5, 27.6
NOMINAL FLUX (lm)	7546.14	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	23.5, 27.3
LAMPS INSIDE	1	η up (%)	45.0	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120	η down (%)	55.0	CIBSE SHR MAX	0.00

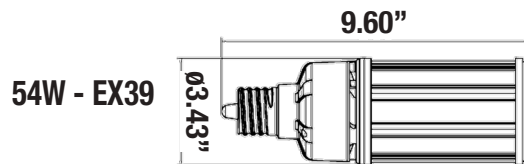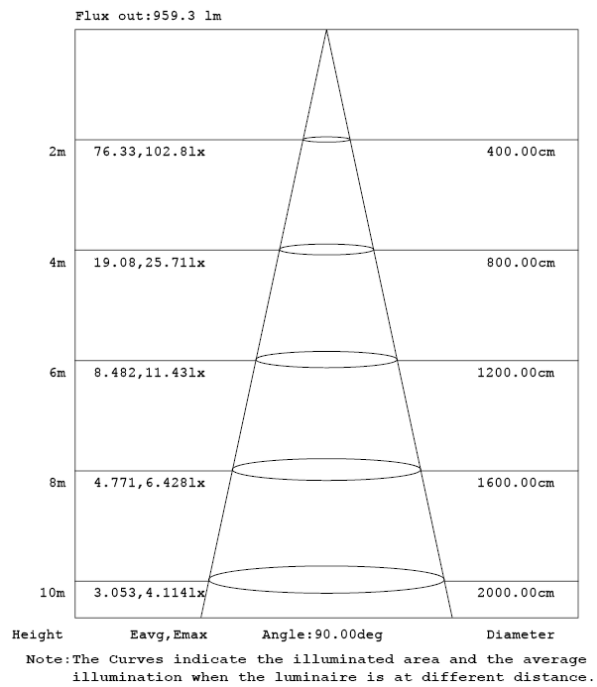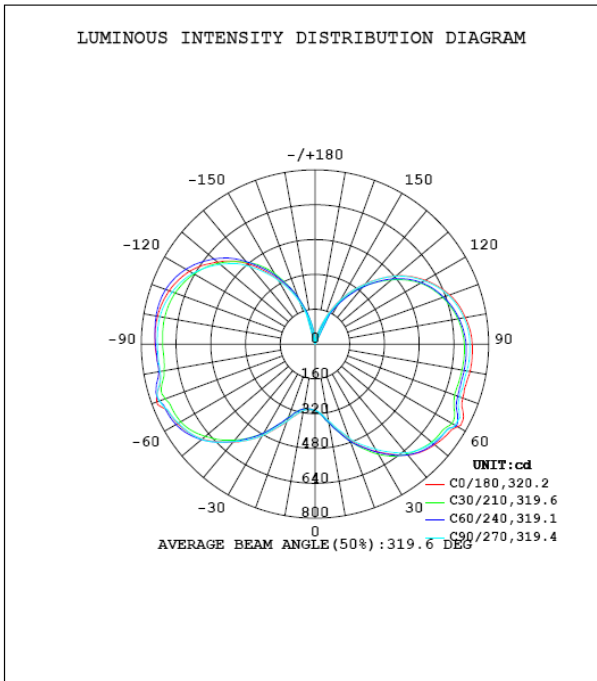



LED Corncob Bulb

KB Series


80W - Specifications

OPTICAL	Input Power	80W
	Lumen	10800-11600 LM (Clear)
	Lumen Efficacy	135-145M/W (Clear)
	Color Temperature	5000K
	CRI	>80
	Viewing Angle	360 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Equivalent	150W CFL, 250W MHL/HPS/HID
MATERIALS	LED Brand	SAMSUNG
	LED Type	SMD2835
	LED QTY	240 PCS
	Housing	PC + Aluminum
	Waterproof Rating	IP65
OTHERS	Operating Temperature	-40°F to 113°F
	Operating Humidity	20%-70% RH
	Storage Temperature	-40°F to 176°F
	Storage Humidity	10%-75% RH
	Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151365	BLT-CLW07E-080WXYA1-acK	1	11" X 6" X 6"	4 Lb			

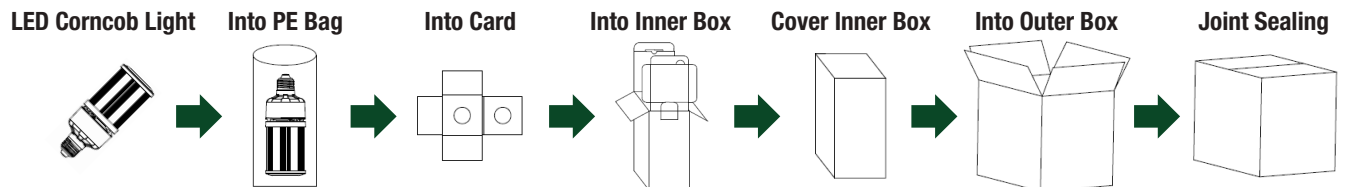

LED Corncob Bulb

KB Series

Distribution Diagram

Remark: The testing data comes directly from the product test.

Luminaire Property

Luminaire Manufacturer:
Voltage: 120.6 V
Power: 80.52 W




Current: 0.674 A
Power Factor: 0.991

Photometric Results

IES Classification: Type I
Total Rated Lamp Lumens: 11486.1 lm
Efficiency: 100%
Upward Ratio: 39%
Central Intensity: 981.73 cd
Pos of Max. Intensity: H0 V51

Longitudinal Classification: Short
Measurement Flux: 11486.1 lm
Downward Ratio: 61%
Luminaire Efficacy Rating (LER): 142.70
Max. Intensity: 1344.22 cd

Luminous Intensity Distribution Curve

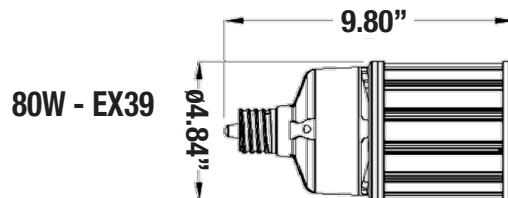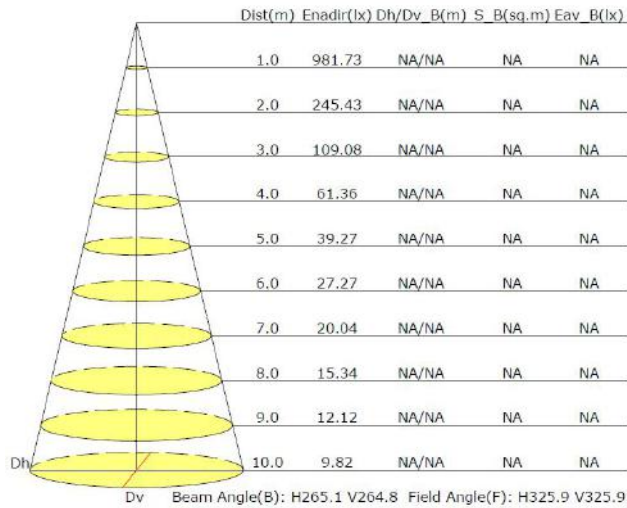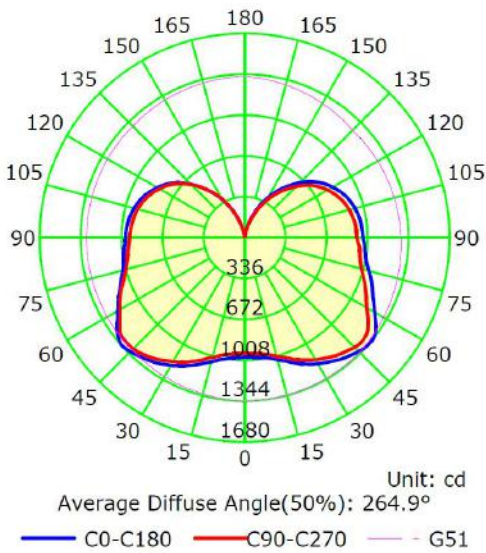



LED Corncob Bulb

KB Series


100W - Specifications

OPTICAL	Input Power	100W
	Lumen	13500-14500 LM (Clear)
	Lumen Efficacy	135-145M/W (Clear)
	Color Temperature	5000K
	CRI	>80
	Viewing Angle	360 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Equivalent	200W CFL, 250W MHL/HPS/HID
MATERIALS	LED Brand	SAMSUNG
	LED Type	SMD2835
	LED QTY	288 PCS
	Housing	PC + Aluminum
	Waterproof Rating	IP65
OTHERS	Operating Temperature	-13°F to 113°F
	Operating Humidity	20%-70% RH
	Storage Temperature	-40°F to 176°F
	Storage Humidity	10%-75% RH
	Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151366	BLT-CLW07E-100WXYA1-acK	1	12" X 6" X 6"	4 Lb			

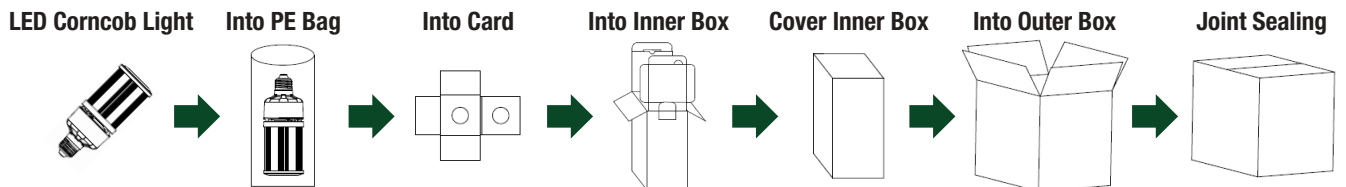

LED Corncob Bulb

KB Series

Distribution Diagram

Remark: The testing data comes directly from the product test.

Luminaire Property

Luminaire Manufacturer:
Voltage: 120.6 V
Power: 101.30 W


Current: 0.850 A
Power Factor: 0.992

Photometric Results



IES Classification: Type I
Total Rated Lamp Lumens: 14379.9 lm
Efficiency: 100%
Upward Ratio: 38%
Central Intensity: 1251.59 cd
Pos of Max. Intensity: H45 V51

Longitudinal Classification: Very Short
Measurement Flux: 14379.9 lm
Downward Ratio: 62%
Luminaire Efficacy Rating (LER): 142.00
Max. Intensity: 1688.81 cd

Luminous Intensity Distribution Curve

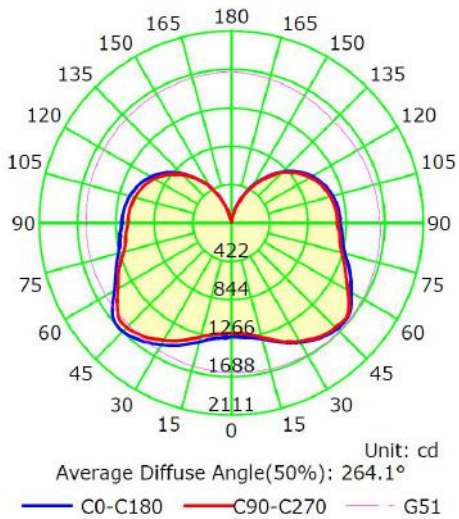

Illuminance at a Distance(Beam Angle)

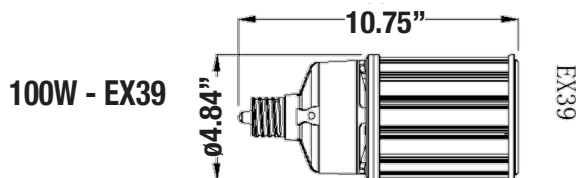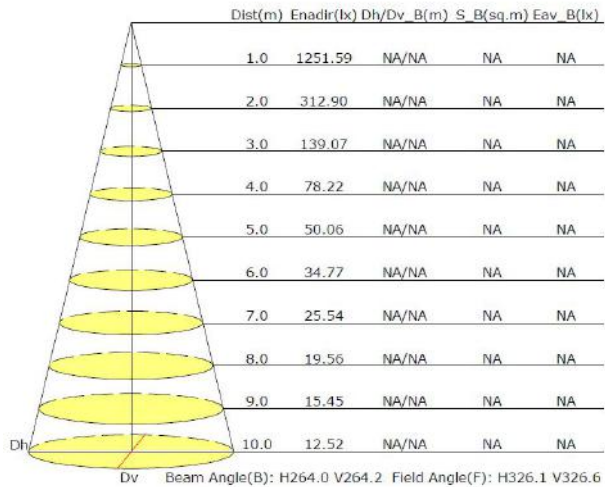



LED Corncob Bulb

KB Series


120W - Specifications

OPTICAL	Input Power	120W
	Lumen	16200-17400 LM (Clear)
	Lumen Efficacy	135-145M/W (Clear)
	Color Temperature	5000K
	CRI	>80
	Viewing Angle	360 Degree
ELECTRICAL	Input Voltage	100-277VAC 50/60Hz
	PF	≥0.9
	THD	≤20%
	Equivalent	200W CFL, 400W MHL/HPS/HID
MATERIALS	LED Brand	SAMSUNG
	LED Type	SMD2835
	LED QTY	364 PCS
	Housing	PC + Aluminum
	Waterproof Rating	IP65
OTHERS	Operating Temperature	-13°F to 113°F
	Operating Humidity	20%-70% RH
	Storage Temperature	-40°F to 176°F
	Storage Humidity	10%-75% RH
	Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151225	BLT-CLW07E-120WXYA1-acK	1	13" X 6" X 6"	4 Lb			

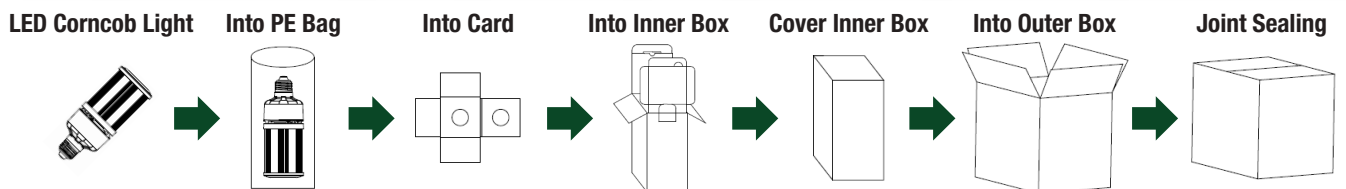

LED Corncob Bulb

KB Series

Distribution Diagram

Remark: The testing data comes directly from the product test.

Luminaire Property




Luminaire Manufacturer:
Voltage: 120.5 V
Power: 120.20 W

Current: 1.000 A
Power Factor: 0.997

Photometric Results

IES Classification: Type I
Total Rated Lamp Lumens: 17286.8 lm
Efficiency: 100%
Upward Ratio: 44%
Central Intensity: 867.46 cd
Pos of Max. Intensity: H0 V57

Longitudinal Classification: Short
Measurement Flux: 17286.8 lm
Downward Ratio: 56%
Luminaire Efficacy Rating (LER): 143.87
Max. Intensity: 1750.96 cd

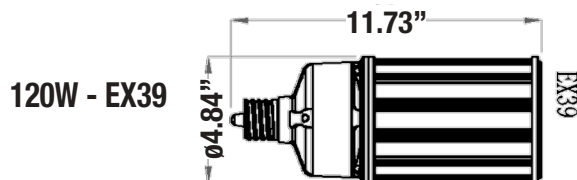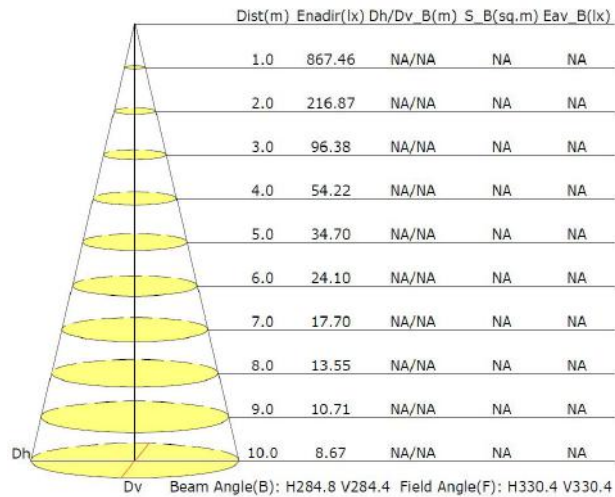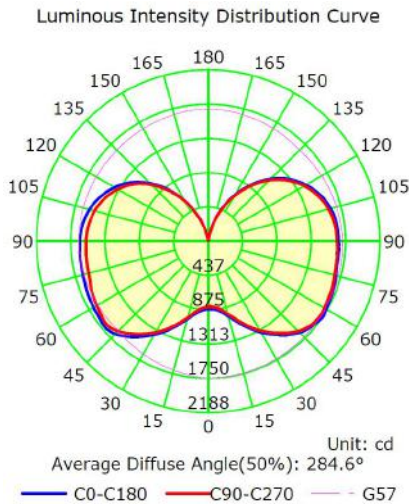




LED Corncob Bulb

KB Series


150W - Specifications

PRODUCT SPECIFICATIONS	
Light Type	Corn Light
Dimension	Ø4.92126" X 13.189"
Technical Characteristic	
Color temperature	5700K
CRI	> 80
Lumen	18000Lm
Lumen Efficacy	Up to 140 lumens per watt
Input Power	150 W
Viewing Angle	360 degree
Input Voltage	AC100-277V 50/60Hz
PFC	> 90%
Equivalent	400W MHL/HPS/HID
Waterproof Rating	IP64
MATERIALS	
LED Brand	EPISTAR
LED Type	SMD2835
LED QTY	1064 PCS
Housing	PC+AL
Housing color	White+Grey
OTHERS	
Operating Temperature	-4°F to 113°F
Operating Humidity	20%-70% RH
Storage Temperature	-22°F to 176°F
Storage Humidity	10%-75% RH
Application	Indoor/Outdoor
Safety Certification	UL, CUL
Warranty Time	5 Years

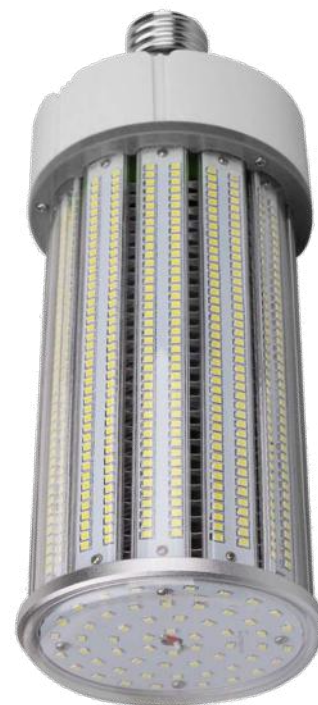

Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
106534	BLTCLW150W57K	1	15" X 6" X 6"	3 Lb			

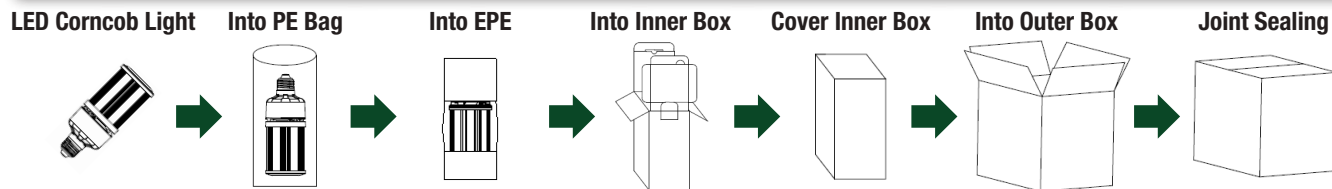




LED Corncob Bulb

KB Series

Distribution Diagram

Remark: The testing data comes directly from the product test.

DATA OF LAMP		PHOTOMETRIC DATA <i>Eff: 147.49 lm/W</i>			
MODEL		I _{max} (cd)	2399	S/MH (C0/180)	3.78
NOMINAL POWER (W)	150	LOR (%)	100.0	S/MH (C90/270)	3.74
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	21892	η UP, DN (C0-180)	22.8, 26.6
NOMINAL FLUX (lm)	21892	CIE CLASS	DIFFUSE	η UP, DN (C180-360)	23.7, 26.8
LAMPS INSIDE	1	η up (%)	46.6	CIBSE SHR NOM	2.00
TEST VOLTAGE (V)	120	η down (%)	53.4	CIBSE SHR MAX	0.00

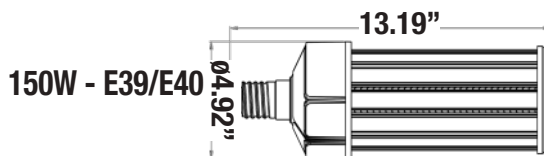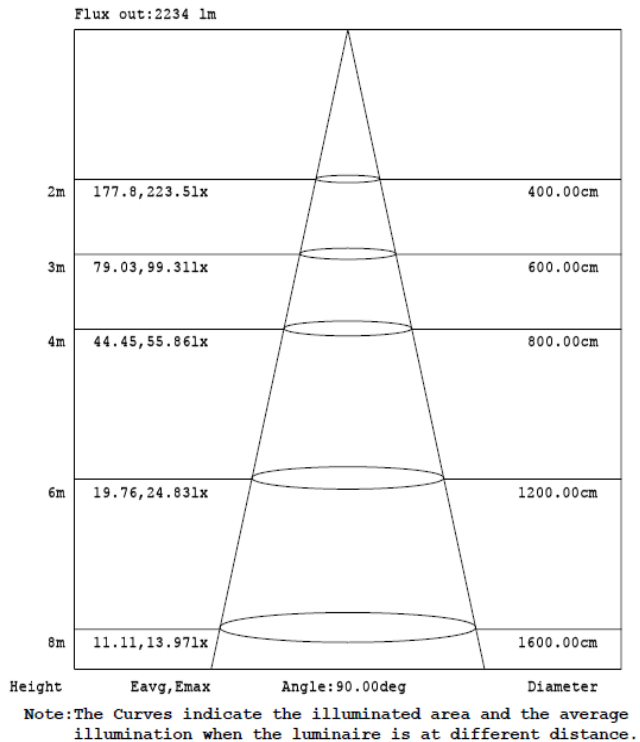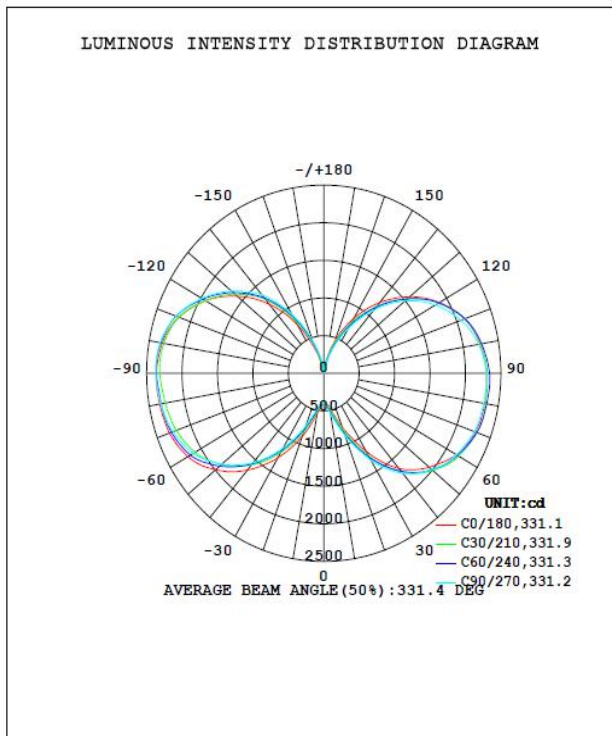



LED Corncob Bulb

KB Series

200W - Specifications

Product name	LED Corn Light	
Lamp Base	E39	EX39
Dimension	Ø5.51181" X 13.189"	Ø5.51181" X 13.2677"

Color temperature	5000K
CRI	>80
Lumen-In Luminaires	26000Lm
Lumen Efficacy-In Luminaires	Up to 140 lumens per watt
Input Power	200 W
Viewing Angle	360 degree
Input Voltage	AC100-277V 50/60Hz
PF	≥0.9
Equivalent	600W MHL/HPS/HID
Waterproof Rating	IP64


LED Type	SMD2835
LED QTY	608 PCS
Housing	PC + AL
Housing color	White

Operating Temperature	-4°F to 113°F
Operating Humidity	20%-70% RH
Storage Temperature	-22°F to 176°F
Storage Humidity	10%-75% RH
Application	Indoor / Outdoor
Safety Certification	UL cUL DLC
Warranty Time	5 Years



Packaging

SKU #	Model #	Pcs/Box	Dimensions	Weight	Pallet Quantity	Pallet Weight	Pallet Dimensions
151013	BLT-CLW03-200WAC1-E-50K	1	15" X 7" X 7"	4 Lb			

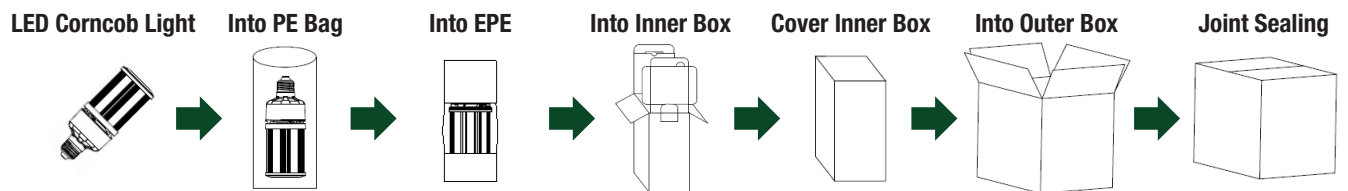

LED Corncob Bulb

KB Series

Distribution Diagram

Remark: The testing data comes from the product in luminaires.

Luminaire Property

Luminaire Manufacturer:
Voltage: 119.8 V
Power: 196.04 W


Current: 1.6439 A
Power Factor: 0.9938

Photometric Results


IES Classification: Type IV
Total Rated Lamp Lumens: 21261.2 lm
Efficiency: 100%
Upward Ratio: 14%
Central Intensity: 1869.19 cd
Pos of Max. Intensity: H225 V54

Longitudinal Classification: Very Short
Measurement Flux: 21261.2 lm
Downward Ratio: 86%
Luminaire Efficacy Rating (LER): 108.45
Max. Intensity: 3908.88 cd


Luminous Intensity Distribution Curve

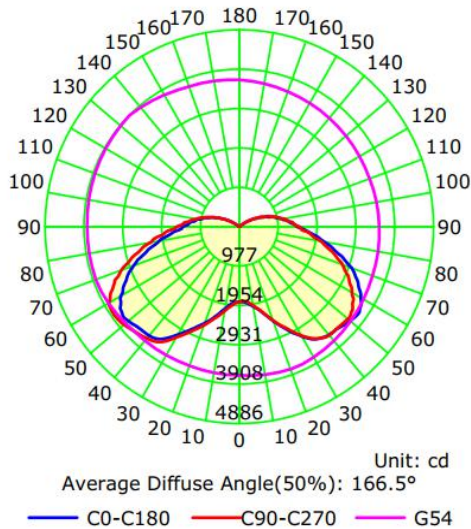

The Average Illuminance Effective Figure

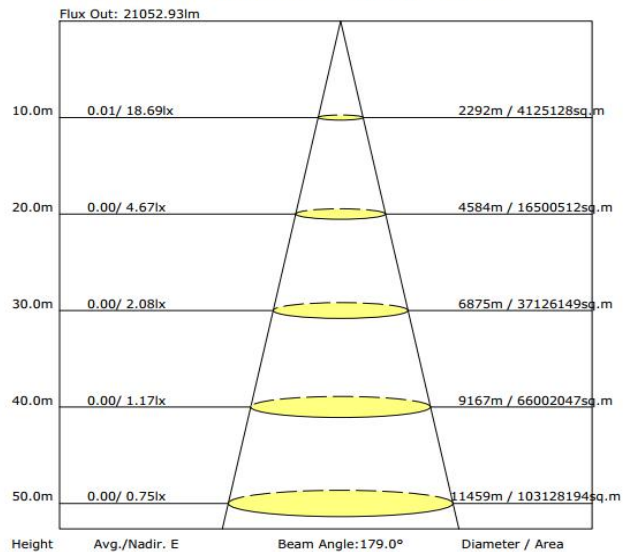

200W - E39




LED Corncob Bulb

KB Series

User Notice

- Please turn off the power before installing or changing assembly parts.
- The input voltage and lamps should be matching. Before connecting the power line, please make sure the wiring section is insulated.
- Make sure to remove or bypass the ballast in the fixtures before installing the lamps.
- Suitable for damp locations. Do not use with dimmers.
- Suitable for use in enclosed luminaires.
- Only professionals should install and disassemble the lamps.

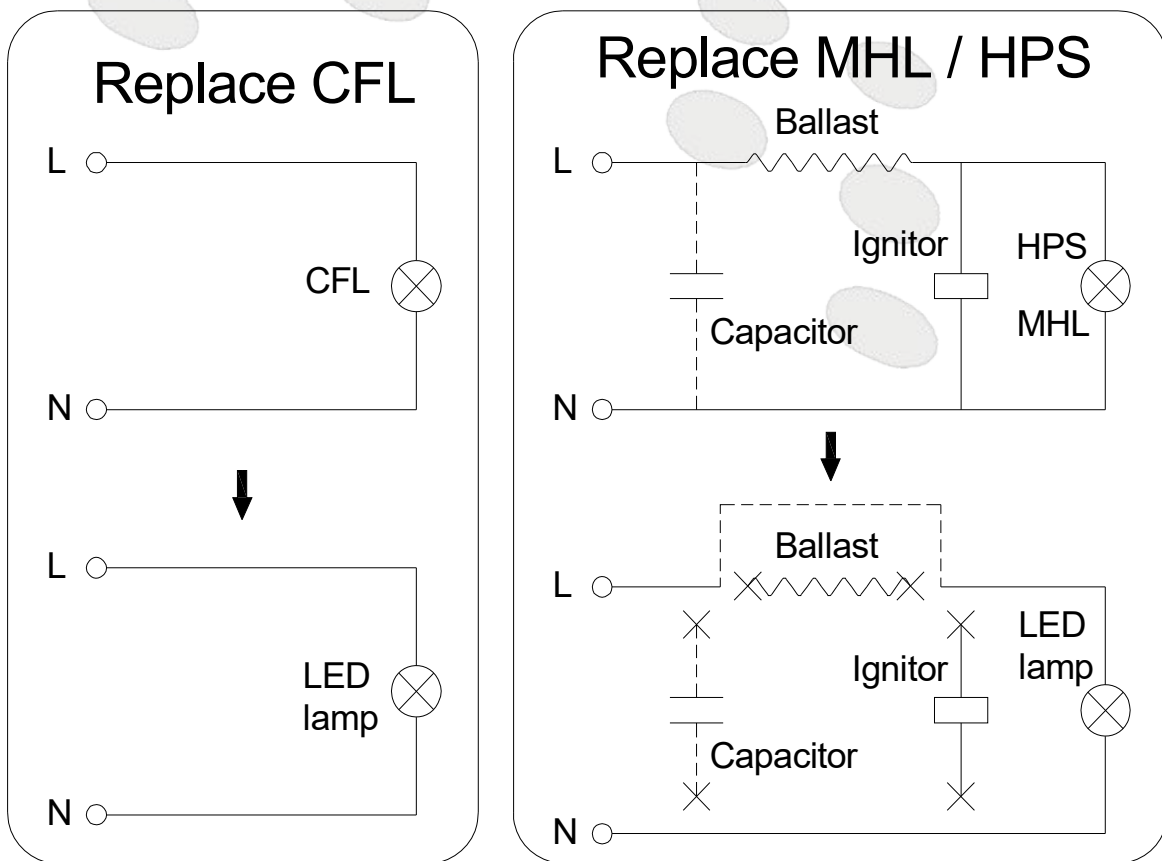

Trouble Shooting

Problem

- Flickering light
- Not working

Solutions

- Turn off the power and turn on again in 3 minutes. If the same phenomena occurs, then call Support.
- Please check all power connections.

LED Corncob Bulb

KB Series



LED CORNCOB BULBS

(866) 786-1117 • www.BeyondLEDTechnology.com

Due to continuous product improvement, information in this document is subject to change.

