
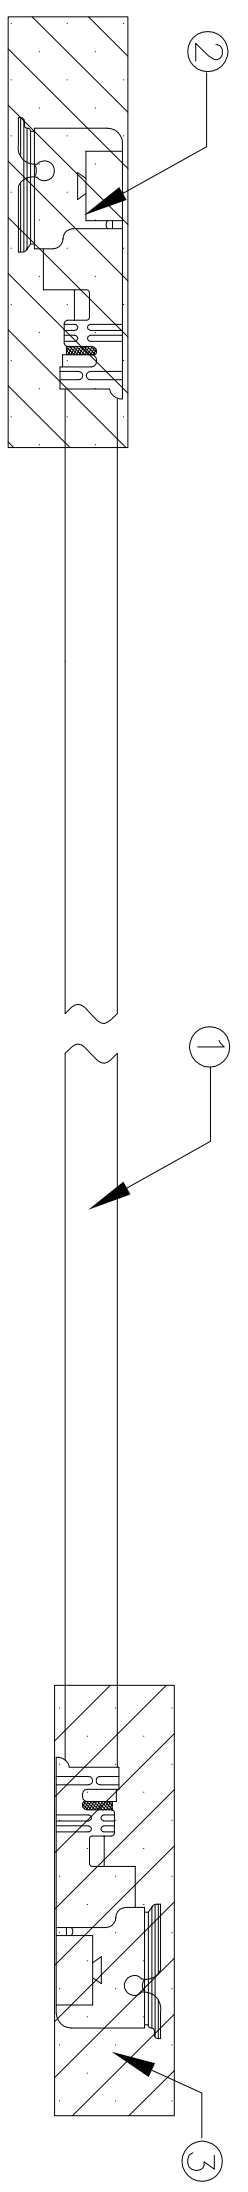


LOC	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		12FEB09	CP LZ

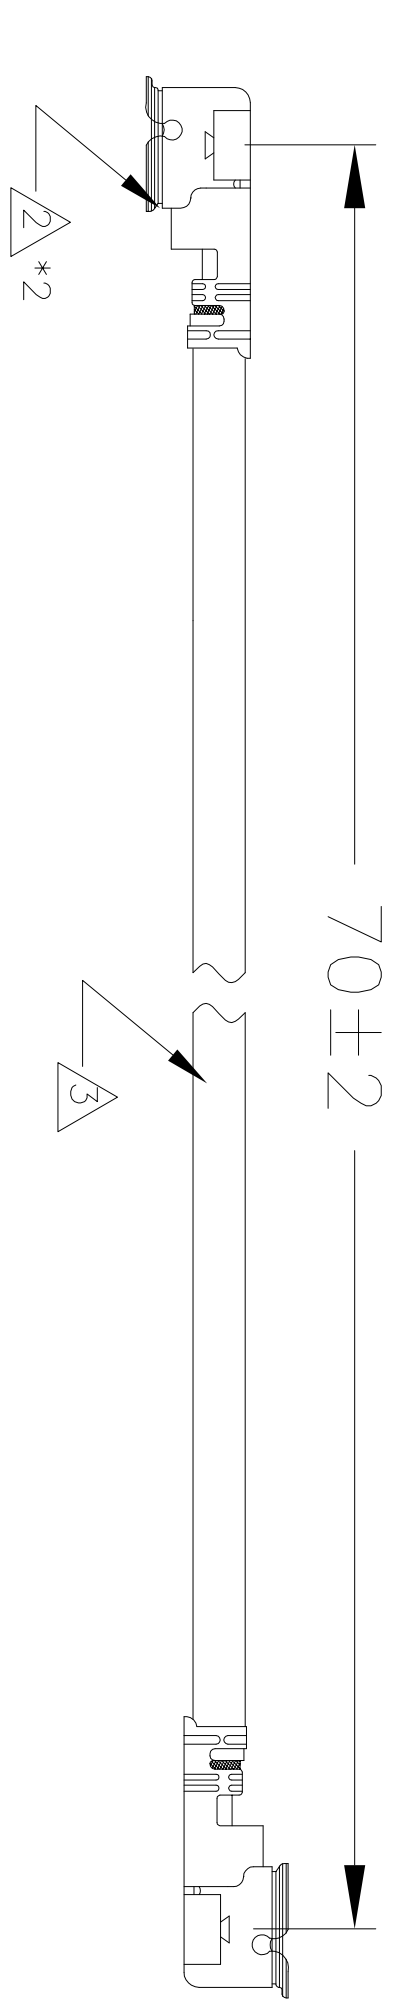

- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY  
 HI-POT: 200 VDC FOR 100MS  
 INSULATION RESISTANCE: 50M OHMS MIN  
 CONTINUITY RESISTANCE: 2 OHMS MAX  
 FREQUENCY RANGE: DC TO 6 GHZ  
 VSWR: 1.5:1 MAX
  - CONNECTOR: TYPE III U.FL
  - SUPPLIER: I-PEX 20278-112R-13
  - CABLE: 1.13MM OD, JACKET GRAY, 50 OHMS FEP INSULATED
  - SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
  - TWO END U.FL CONNECTORS IN 180 DEGREE DIFFERENCE POSITION
  - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	± -

30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
70	MM	COAXIAL CABLE, GRAY COLOR, OD1.13MM	1
-1	U/M	DESCRIPTION	ITEM

DWN	12FEB09	Chen Ping	
CHK	12FEB09	Andrew Dong	
APVD	12FEB09	Lucky Zhang	
PRODUCT SPEC			
APPLICATION SPEC			
WEIGHT			
CUSTOMER DRAWING			

**Tyco Electronics**  
 Tyco Electronics Corporation  
 Harrisburg, PA 17105-3608

FWT3 Ericsson UMTS/Aux cable assembly  
 Gray, 70mm, 180degree

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	1513288	
SCALE	SHEET	REV	
N.T.S.	1 OF 1	A	