



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
03/03/17	B	DIM. 200.50 WAS 201.78 DIM. 29.3 WAS 29.0 DIM. 73.8 WAS 73.0	T.B.	B.S.	
03/17/17	C	ADDED SIDE VIEW	T.B.	B.S.	
03/31/17	D	ADDED DIM. Ø4.00	T.B.	B.S.	

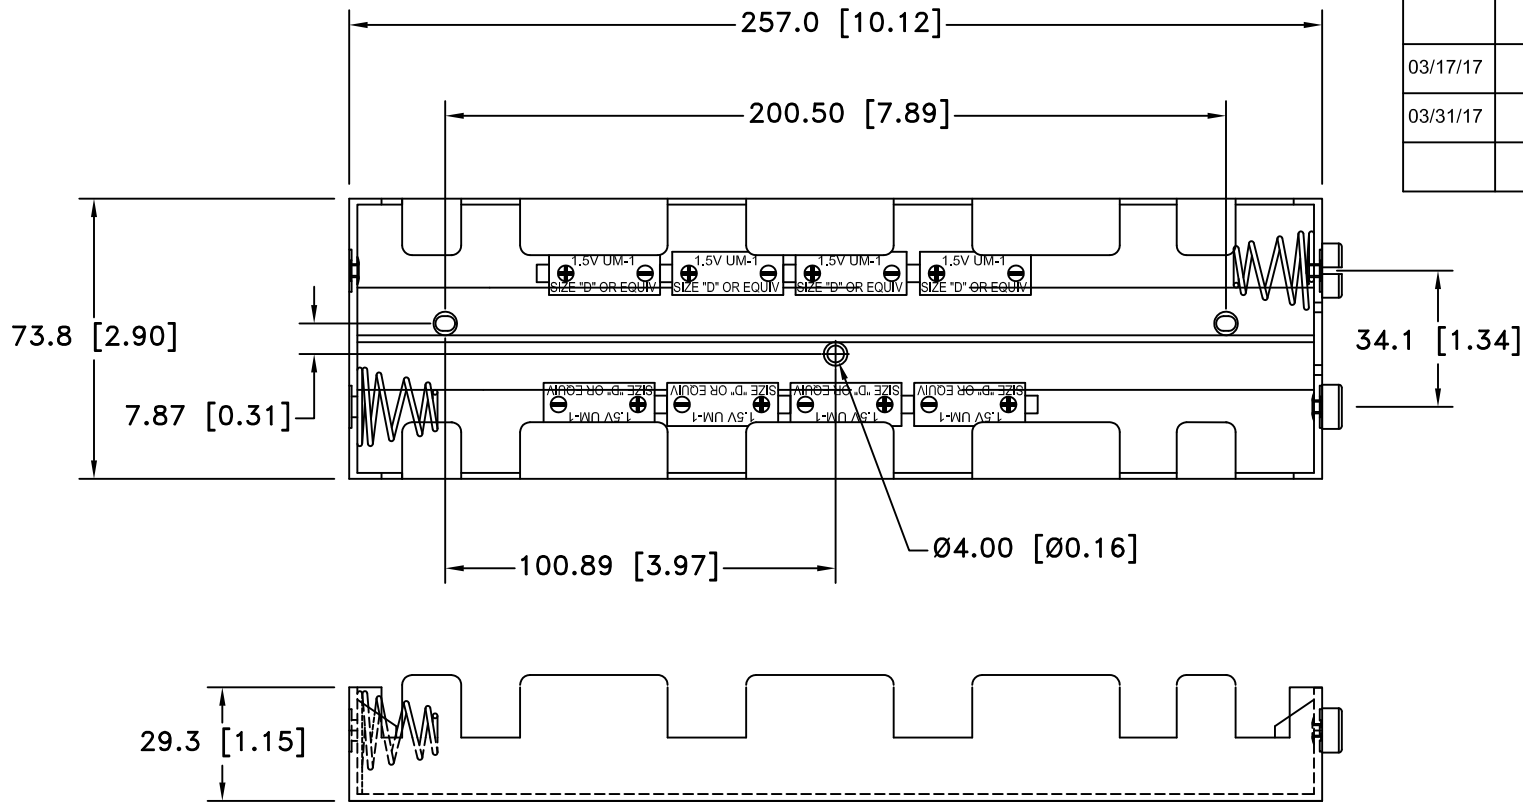


**SPECIFICATION:**

**1. MATERIAL:**

HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 RIVETS: BRASS, NICKLE PLTD.  
 9 VOLT SNAPS: BRASS, NICKEL PLATED  
 SPRING: SPRING STEEL, NICKLE PLTD.  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER  
 EIA-540J000  
 ROHS 2 COMPLIANT

**MOUNTING INSTRUCTION:**

USE 4-40 MACHINE SCREWS OR EYELETS.  
 ALSO ADHESIVES AND DOUBLE SIDED TAPES WORK WELL.

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
			Approved By T.B.
decimal ±.5 (.020)	Title EIGHT "D" CELL HOLDER WITH 9V SNAP		
Fractional ± .8 (.030)		Date 03/31/17	Drawing Number BH28DSF
Angular ± 3°			