




SW2015

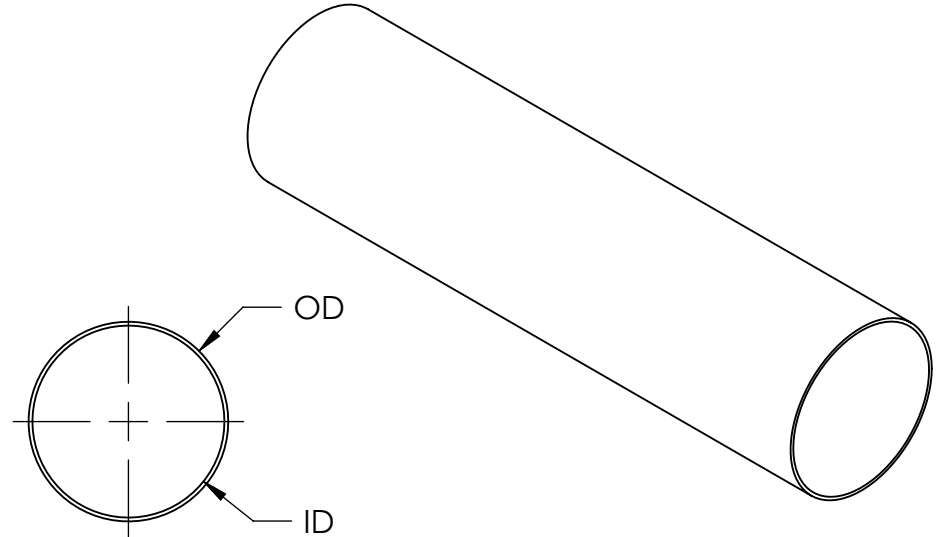

Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release	-	SEE ECN# 013695	GRW	1/26/2017	KAC	1/26/2017

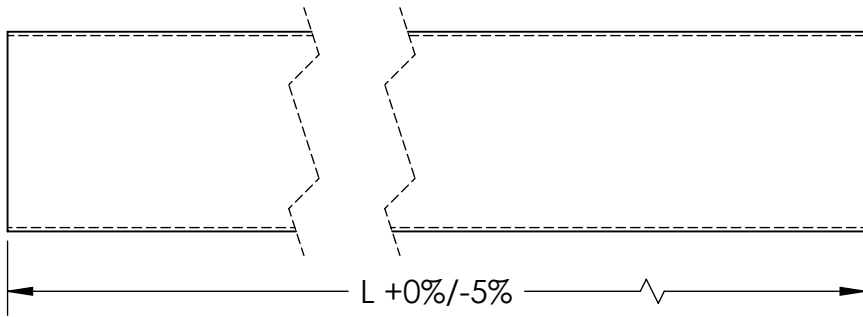

- NOTES:
1. FLAMMABILITY UL94-V2
 2. OPERATING TEMPERATURE -40°F TO 347°F (-40°C TO 175°C)
 3. MELT POINT 392°F (200°C)
 4. ABRASION PROTECTION HIGH
 5. RECOMMENDED CUTTING SHEARS
 6. EMI REQUIREMENTS 10 KHz TO 1 GHz ACCORDING TO CISPR25
 7. RoHS
 8. HF

NOMINAL SIZE	TYPE	OD	ID	EXPANSION RANGE (FOR REF ONLY)		L (FT)	WEIGHT (LBS)
				MINIMUM	MAXIMUM		
1/8	HEGEMIP04	.175	.125	.16	.26	328	4.74
1/4	HEGEMIP06	.30	.25	.2	.39	328	6.28
5/16	HEGEMIP08	.3625	.3125	.32	.45	328	5.84
3/8	HEGEMIP10	.38	.375	.32	.52	164	9.6
7/16	HEGEMIP12	.4875	.4375	.39	.59	164	10.6
1/2	HEGEMIP14	.55	.50	.47	.71	328	12.8
9/16	HEGEMIP16	.6025	.5625	.55	.79	328	15.9
5/8	HEGEMIP18	.630	.625	.63	.87	164	17.3
3/4	HEGEMIP20	.80	.75	.71	.98	164	22.1

Material PET / TNCU	Units: inches	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	GRW	1/26/2017	Article/Type-No	HEGEMIP		Scale
	Dimension without tolerances details to: .xxxx = ±.0005 .xxx = ±.005 .xx = ±.01 .x = ±.03 None = ±.06 ∠ = ±0.5° Dimension Formatted in/[mm]		Approved	KAC	1/26/2017	Title	HELAGINE ELECTROMAGNETIC BRAIDED SLEEVING		Project Number
	HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com		Drawing-No	Production : Phase		Format	AH		
			17-0425-001-CSU		Sheet	1/1			