

## STRADELLA-IP-64-T2-PC

IESNA Type II (medium) beam applicable for European P-class standard pedestrian lighting and M-class roads. Variant from PC.

### SPECIFICATION:

Dimensions	253.0 x 74.0 mm
Height	9.7 mm
Fastening	screw
Ingress protection classes	IP66, IP67
ROHS compliant	yes ⓘ

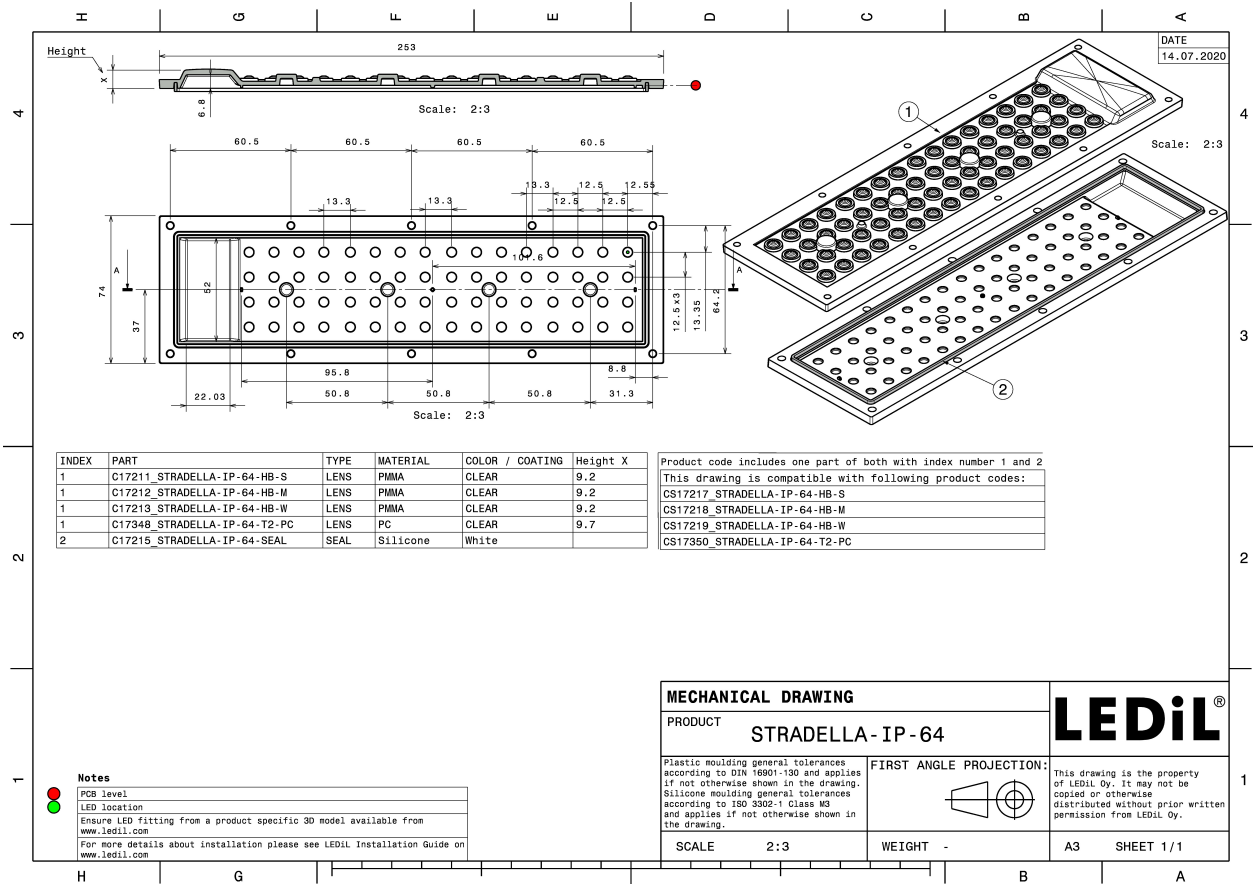


### MATERIALS:

Component	Type	Material	Colour	Finish
STRADELLA-IP-64-T2-PC	Assembly	PC	clear	
STRADELLA-IP-64-SEAL	Seal	Silicone	milky	

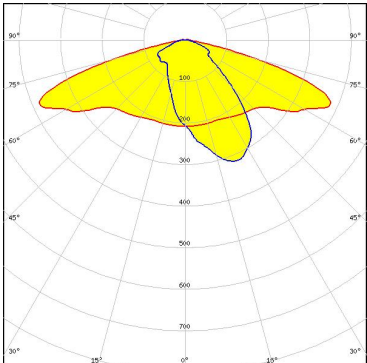
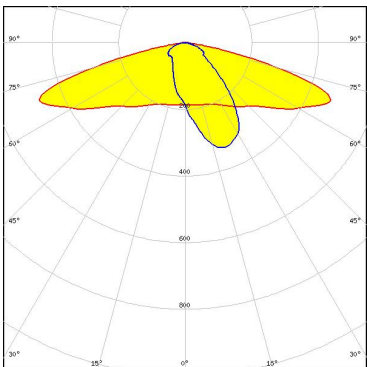
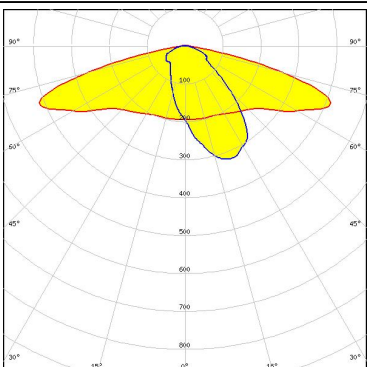
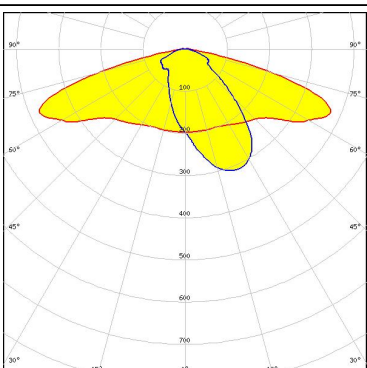
### ORDERING INFORMATION:

Component	Type	Qty in box	MOQ	MPQ	Box weight (kg)
CS17350_STRADELLA-IP-64-T2-PC » Box size: 476 x 273 x 247 mm	Seal	108	108	36	8.7

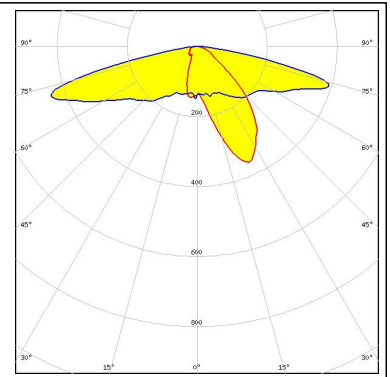
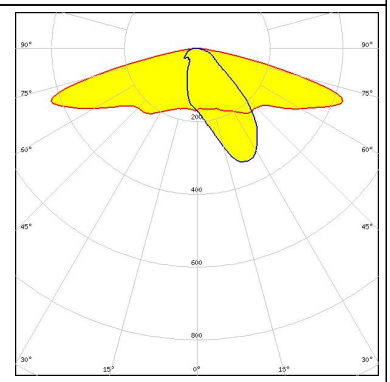
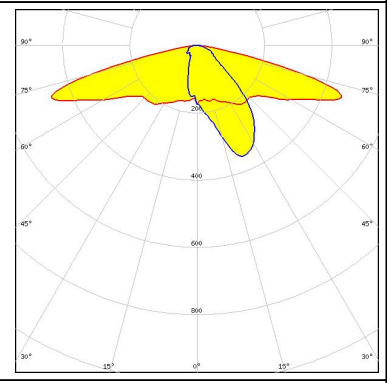
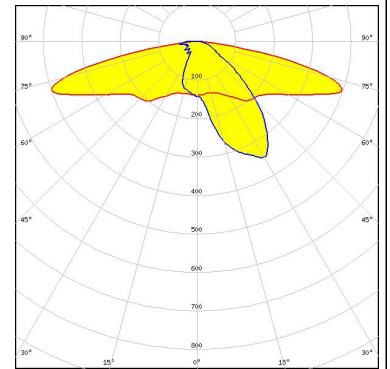


See also our general installation guide: [www.ledil.com/installation\\_guide](http://www.ledil.com/installation_guide)

#### OPTICAL RESULTS (MEASURED):

<p><b>ELECTRIO</b> <small>THE LED &amp; LIGHTING COMPANY</small></p> <p>LED: EHP-223.5x50-1604-xx-70-LS30-06-NTC            FWHM / FWTM: Asymmetric            Efficiency: 89 %            Peak intensity: 0.7 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>MST</b>   <i>Your solutions</i></p> <p>LED: RecLED 223x50mm 4200lm 8x0 4x16 Opt G1            FWHM / FWTM: Asymmetric            Efficiency: 89 %            Peak intensity: 0.8 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>OSRAM</b></p> <p>LED: PrevaLED Brick MP 4x16            FWHM / FWTM: Asymmetric            Efficiency: 89 %            Peak intensity: 0.7 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	
<p><b>SCIOLUX</b></p> <p>LED: KAAX-VB-2300-840-48            FWHM / FWTM: Asymmetric            Efficiency: 88 %            Peak intensity: 0.7 cd/lm            LEDs/each optic: 1            Light colour: White            Required components:</p>	

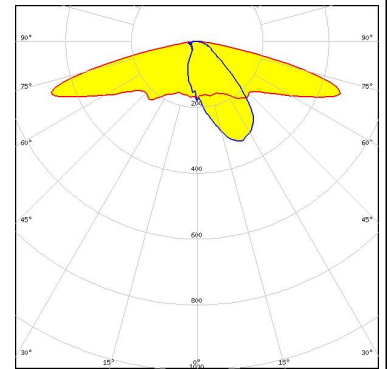
#### OPTICAL RESULTS (SIMULATED):

<p><b>LUMILEDS</b></p> <p>LED LUXEON 2835 Line            FWHM / FWTM Asymmetric            Efficiency 82 %            Peak intensity 0.7 cd/lm            LEDs/each optic 1            Light colour PC Amber            Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED Duris E 2835            FWHM / FWTM Asymmetric            Efficiency 85 %            Peak intensity 0.6 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED Duris S5 (Single chip)            FWHM / FWTM Asymmetric            Efficiency 86 %            Peak intensity 0.7 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED OSOLON Square CSSRM2/CSSRM3            FWHM / FWTM Asymmetric            Efficiency 85 %            Peak intensity 0.6 cd/lm            LEDs/each optic 1            Light colour White            Required components:</p>	

#### OPTICAL RESULTS (SIMULATED):

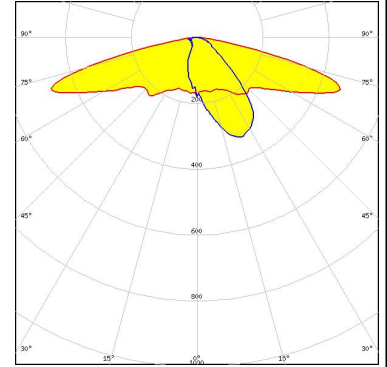
#### PHILIPS

LED Fortimo FastFlex LED 4x16 DHE G4  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



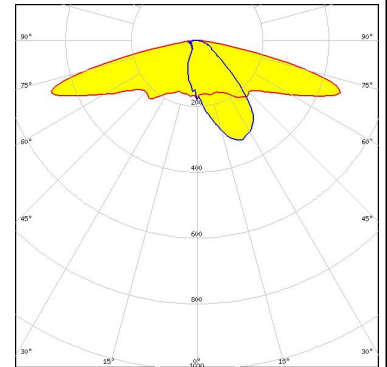
#### SAMSUNG

LED HiLOM RM64 (LM301B)  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



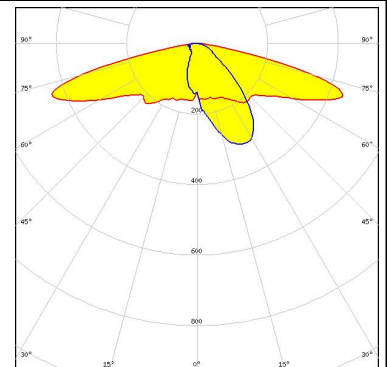
#### SAMSUNG

LED LM301B  
 FWHM / FWTM Asymmetric  
 Efficiency 83 %  
 Peak intensity 0.7 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:


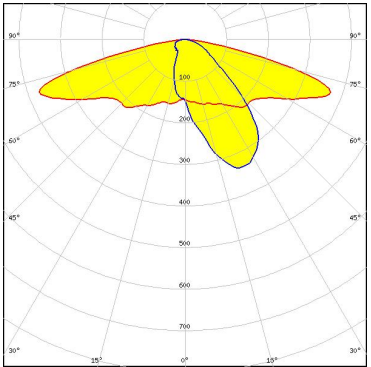
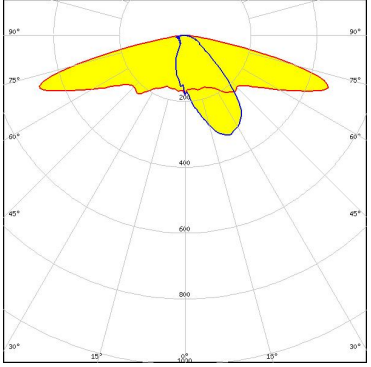


#### SAMSUNG

LED LM302D  
 FWHM / FWTM Asymmetric  
 Efficiency 81 %  
 Peak intensity 0.6 cd/lm  
 LEDs/each optic 1  
 Light colour White  
 Required components:



#### OPTICAL RESULTS (SIMULATED):

 SEOUL SEMICONDUCTOR		
LED	SEOUL DC 3030C	
FWHM / FWTM	Asymmetric	
Efficiency	80 %	
Peak intensity	0.5 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components:		
<b>TRIDONIC</b>		
LED	RLE 4x16 4000lm MP ADV2 OTD	
FWHM / FWTM	Asymmetric	
Efficiency	83 %	
Peak intensity	0.7 cd/lm	
LEDs/each optic	1	
Light colour	White	
Required components:		

#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B  
Casic Motor Building  
Shenzhen 518057  
P.R.CHINA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)