

■ Features

- Single output to 20-36W
- 100-240Vac Universal input
- Certificates: UL, CE
- Safety standard: IEC60950, IEC60601, IEC61558, IEC60335
- Frequency: 50-60Hz
- Ripple: 120mV
- OVP, OCP, SCP, and Over load
- Efficiency Level: VI
- Interchangeable Plug types: US, EU, AU, UK
- MTBF: 50,000 hours
- Dimension: 75x40x38.5mm(exclude plug)



\*Product images are for illustrative purposes only and may vary from actual design.

■ Application

- Consumer electronics, Telecom and office equipment
- Industrial equipment


■ Model List

Custom Designs Available!


Model	Output Voltage	Output Current	Power	Certifications
WM036S-050I-TP1-XX	5V	4A	20W	UL, CE
WM036S-060I-TP1-XX	6V	4A	24W	UL, CE
WM036S-090I-TP1-XX	9V	4A	36W	UL, CE
WM036S-120I-TP1-XX	12V	3A	36W	UL, CE
WM036S-150I-TP1-XX	15V	2.4A	36W	UL, CE
WM036S-240I-TP1-XX	24V	1.5A	36W	UL, CE

■ Mechanical Diagram

\*Available with Internal USB Port. Detached USB DC Cable is optional (not included)!

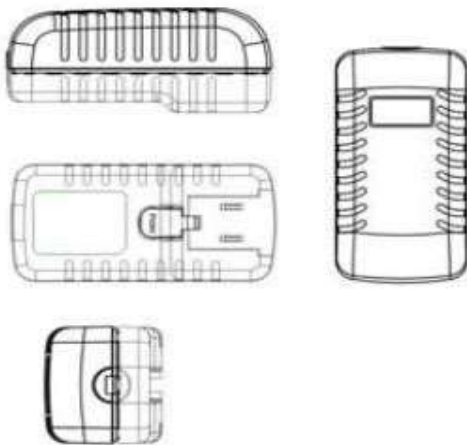

Technical Sales / Customer Service: +1-818-338-7788 • Email: [sales@autec.com](mailto:sales@autec.com)  
 31328 Via Colinas Suite 102 • Westlake Village, CA 91362 USA • [www.autec.com](http://www.autec.com)

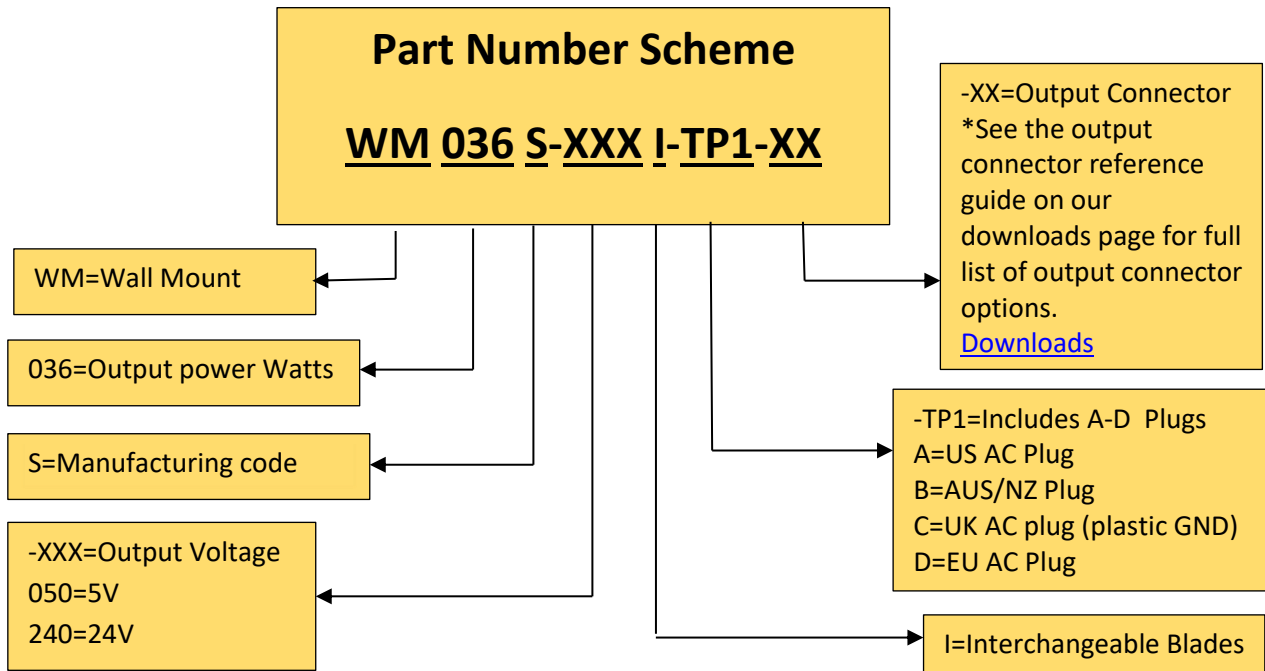

\*Product images are for illustrative purposes only and may vary from actual design.

\*Specifications are subject to change without notice. Autec is not responsible for issues arising from errors or omissions.