

ITEM	PART#	DESCRIPTION	QTY	UOM
A	1722563106	ULTRA-FIT HSG SR 6ckt Blk	1	PC
B	1722643006	ULTRA-FIT TPA 6ckt Blk	1	PC
C	1722537023	ULTRA-FIT CRIMP TERM 16-18 TIN Pre-P	6	PC
D	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X16AWG DISC SR-PVC BK UL1061 HKUP	BLACK
A2	--	1X16AWG DISC SR-PVC BK UL1061 HKUP	BLACK
A3	--	1X16AWG DISC SR-PVC BK UL1061 HKUP	BLACK
A4	--	1X16AWG DISC SR-PVC BK UL1061 HKUP	BLACK
A5	--	1X16AWG DISC SR-PVC BK UL1061 HKUP	BLACK
A6	--	1X16AWG DISC SR-PVC BK UL1061 HKUP	BLACK

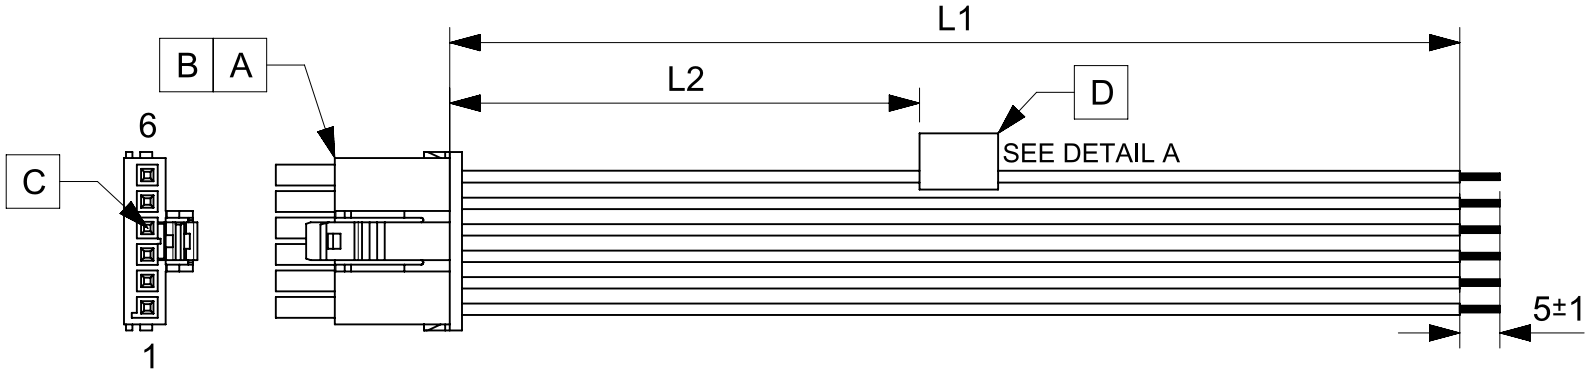


TABLE			
PART NUMBER	L1	L2	TITLE
2174661061	150±8	63 REF	ULTRA-FIT SR R-S 6CKT 150MM DISC Sn
2174661062	300±10	138 REF	ULTRA-FIT SR R-S 6CKT 300MM DISC Sn
2174661063	600±10	288 REF	ULTRA-FIT SR R-S 6CKT 600MM DISC Sn

**NOTES**

1. Connector view shown is from mating side.
2. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 1.9mm Max.
3. Label text must be 2mm max. in height with Arial font.
4. Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
15/01/2021	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: mm SCALE: NTS CURRENT REV DESC:				
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± ° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±				EC NO: 653686 DRWN: ARAJU 2020/11/16 CHK'D: RDESAI01 2021/01/22 APPR: RDESAI01 2021/01/22
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION	DRAWING: A4-SIZE	SERIES: 217466	PRODUCT CUSTOMER DRAWING
	INITIAL REVISION: DRWN: ARAJU 2020/11/16 APPR: RDESAI01 2021/01/22	DOCUMENT NUMBER: 2174661061	DOC TYPE: PSD	DOC PART: 000	REVISION: A
MATERIAL NUMBER: SEE TABLE		CUSTOMER: GENERAL MARKET		SHEET NUMBER: 1 OF 1	

RELEASE STATUS	P1	RELEASE DATE	2021/01/22	06:05:25
----------------	----	--------------	------------	----------