


COIL: @ 25°C
 RESISTANCE _____ 280 OHMS ±10%
 NOMINAL VOLTAGE _____ 18.0 VDC
 MUST OPERATE _____ 8.4 VDC

 MUST RELEASE _____ 5.0 VDC MAX., 0.8 VDC MIN.

ENVIRONMENT:
 VIBRATION _____ 10 _____ CPS TO _____ 3000 _____ CPS @ _____ 30 _____ g's
 SHOCK _____ 75 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C
 NOTES: _____ OPERATE 4 MS MAX.
 _____ RELEASE 6 MS MAX.
 _____ CONTACT STABILIZATION 2.5 MS MAX.

CUSTOMER DATA SHEET

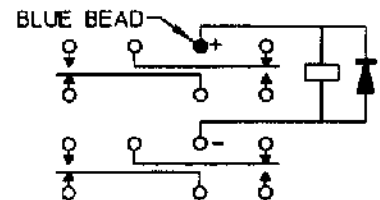

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
 2 AMPS 28 VDC RESISTIVE
 100,000 OPERATIONS

DR. PBB 1/18/01 CK. 1/29/01 MB

CI Technologies
 advanced control electronic solutions

CUST. _____ QPL
 CUST. NO. M39016/53-021M REV. _____

3SBH RELAY

3SBH1285A2