


FACE VIEW-FEMALE INSERT		FACE VIEW-MALE INSERT	
1 BLACK 2 GREEN-YELLOW 3 WHITE	1 BLACK 2 GREEN-YELLOW 3 RED 4 WHITE	1 BLACK 2 GREEN-YELLOW 3 WHITE	1 BLACK 2 GREEN-YELLOW 3 RED 4 WHITE

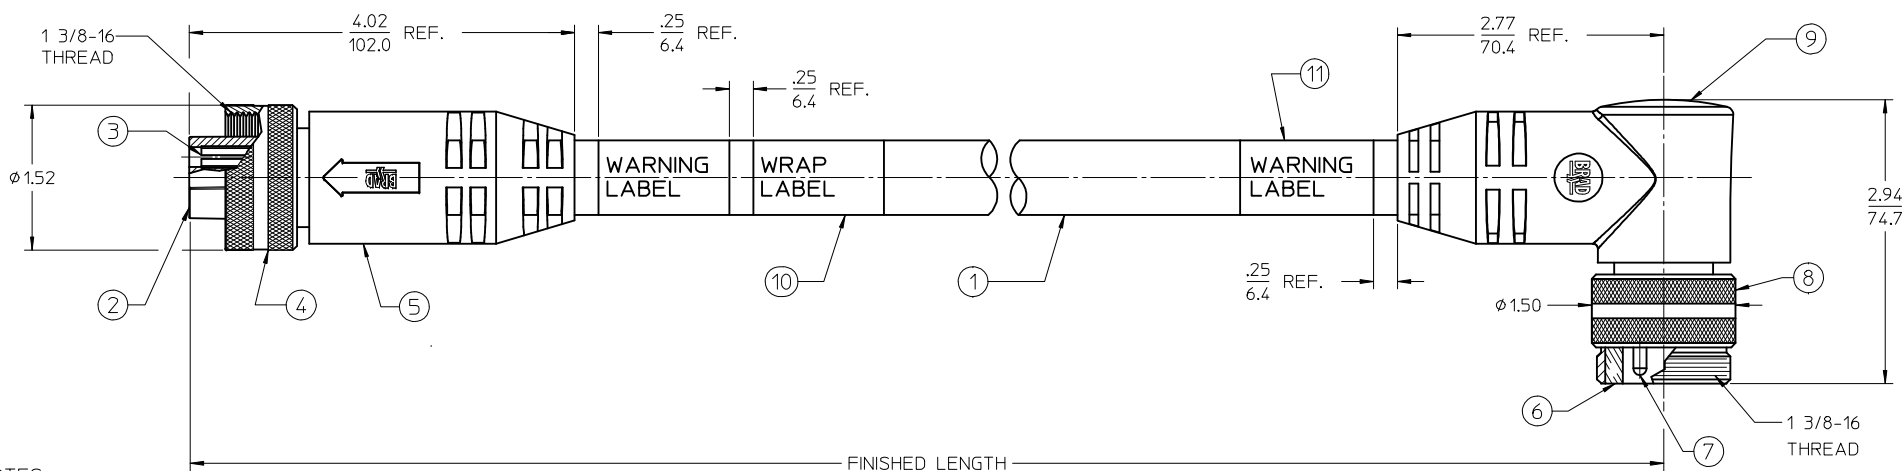

NOTES:

- | | |
|--|--|
| 1) MATERIAL: SEE TABLE | 6) PACKAGING: CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG. |
| 2) FINISHES: SEE TABLE | 7) ASSEMBLY IS RoHS COMPLIANT |
| 3) WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE | 8. XX REFERS TO CIRCUIT COUNT |
| 4) MATES WITH: QUICK CHANGE RECEPTACLE | |
| 5) ELECTRICAL DATA:
10AWG UL TYPE: TC-ER/ST00W STRANDED CABLE
MAX VOLTAGE: 600V
MAX CURRENT: 32A
PROTECTION IP67 (WHEN MATED)
TEMPERATURE RANGE: -20°C TO 105°C | |

PART NUMBER LEGEND

CCX132A48MXXX

DOUBLE END
POLE COUNT: 3 OR 4
QC FEMALE STRAIGHT TO MALE 90 DEG, DUAL KEY
CABLE TYPE: 10 AWG TC ER, GRAY

FINISHED LENGTH:
M001= .1M
M010= 1.0M
M100= 10.0M

11	2	WARNING LABEL	VINYL	ORANGE/BLACK
10	1	WRAP LABEL	VINYL	BLACK/YELLOW
9	1	OVERMOLD, 90 DEG	PVC	BLACK
8	1	COUPLING, MALE	ALUMINUM	BLACK ANODIZE
7	XX	CONTACT PIN	Cu ALLOY	GOLD PLATED
6	1	INSERT, MALE	PVC	BLACK
5	1	OVERMOLD, STRAIGHT	PVC	BLACK
4	1	COUPLING, FEMALE	ALUMINUM	BLACK ANODIZE
3	XX	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT, FEMALE	PVC	BLACK
1	1	CABLE, 10AWG TC-ER (SEE NOTE 5)	PVC JACKET	GRAY
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: JGZ2016-1108 DRAWN: RSTONE CHKD: BWOODMAN APPR: BWOODMAN 2016/02/26 2016/03/29	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY	SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	2 PLACES ± 0.05 ± ---	1 PLACE ± 0.10 ± ---	0 PLACE ± --- ± ---	ANGULAR ± .5 °	DRAWN BY RSTONE DATE 2016/02/26
A	DESCRIPTION	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY BWOODMAN DATE 2016/03/29	MATERIAL NO.	DOCUMENT NO. SD-130064-018	SHEET NO. 1 OF 1	
		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						