

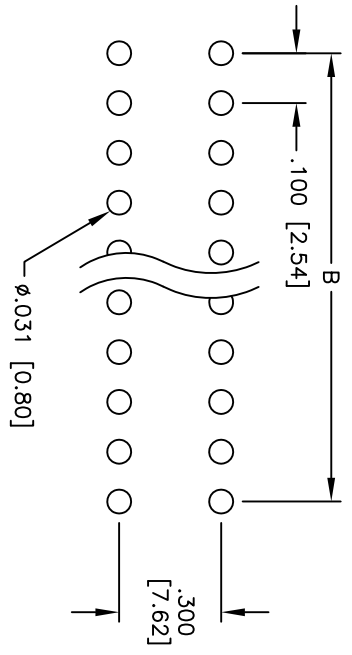
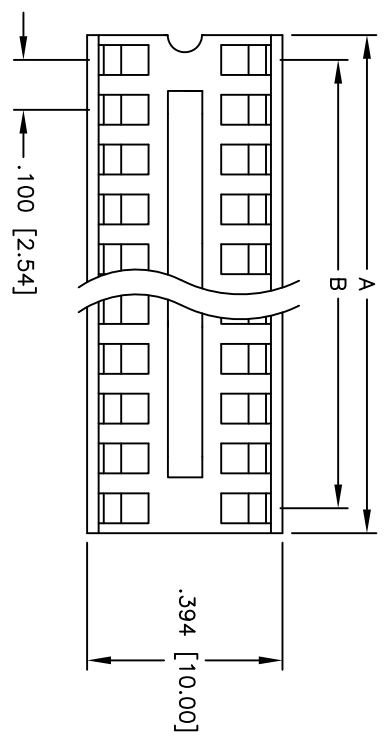


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/28/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

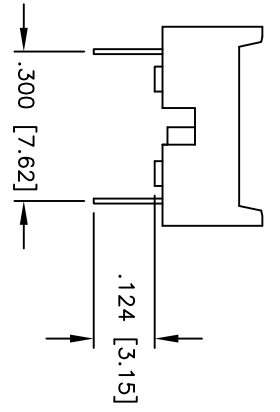

PCB LAYOUT

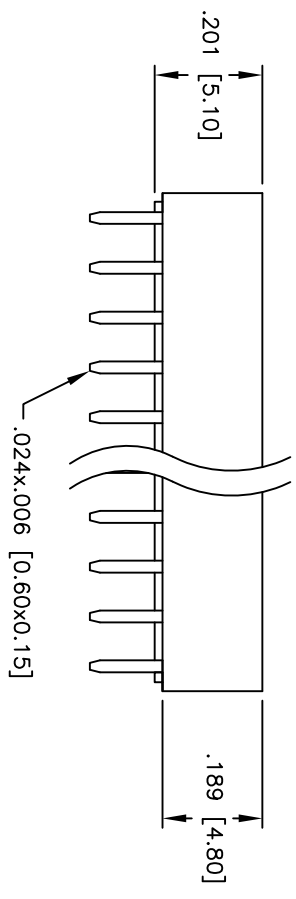

**SPECIFICATIONS:**

- Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max
- Current rating: 1 Amp max
- Contact resistance: 20 mohms max initial
- Insulation resistance: 5,000 Mohms min
- Dielectric withstanding voltage: 1,000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C
- Environmental: Lead free, RoHS compliant

Positions: 6, 8, 14, 16, 18, 20, 22, 24, 28, & 32  
 A = .100 [2.54] x No. of Positions Per Row  
 B = .100 [2.54] x No. of Spaces Per Row

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: IC SOCKET, .300" ROW SPACING  
 TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
INCHES	±.10	HOLE	±.10
.XX	±.020	ØXXX	±.015
.XXX	±.015	ØXXX	±.010
APPROVALS	DATE	DRAWN: SS 1/28/05	
CHECKED		SIZE: X	
APPROVED		PART NO.: ICS-3XX-T	
		SCALE: NTS	
		SHEET 1 OF 1	

