


LOC	DIST	REVISIONS					
—	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
NUMMER 829 033		E		Contact pin base material change from CuSn (Phosphor bronze) to CuZn (Brass). Plating change from MIN. 0.8µm gold plating to min. 0.7µm Pd Ni + 0.1µm gold flash at contact area (Area F).	18JUL2014	TJ	JK
VERWENDET FÜR							
WAR NR. E-87-9102							

POLZ PRO REIHE	L±0.5	BESTELL-NR.	
—	—	—	
2	5.08	—	-2
3	7.62	—	-3
4	10.16	—	-4
5	12.70	—	-5
6	15.24	—	-6
7	17.78	829 033	-7
8	20.32	—	-8
9	22.86	—	-9
10	25.40	—	-0
11	27.94	1-	-1
12	30.48	1-	-2
13	33.02	1-	-3
14	35.56	1-	-4
15	38.10	1-	-5
16	40.64	1-	-6
17	43.18	1-	-7
18	45.72	1-	-8
19	48.26	1-	-9
20	50.80	2-	-0
21	53.34	2-	-1
22	55.88	2-	-2
23	58.42	2-	-3
24	60.96	2-	-4
25	63.50	2-	-5
26	66.04	2-	-6
27	68.58	2-	-7
28	71.12	2-	-8
29	73.66	2-	-9
30	76.20	3-	-0
31	78.74	3-	-1
32	81.28	3-	-2
33	83.82	3-	-3
34	86.36	3-	-4
35	88.90	3-	-5
36	91.44	3-	-6
37	93.98	3-	-7
38	96.52	3-	-8
39	99.06	3-	-9
40	101.60	4-	-0
41	104.14	4-	-1
42	106.68	4-	-2
43	109.22	4-	-3
44	111.76	4-	-4
45	114.30	4-	-5
46	116.84	4-	-6
47	119.38	4-	-7
48	121.92	4-	-8
49	124.46	4-	-9
50	127.00	5-	829 033 -0

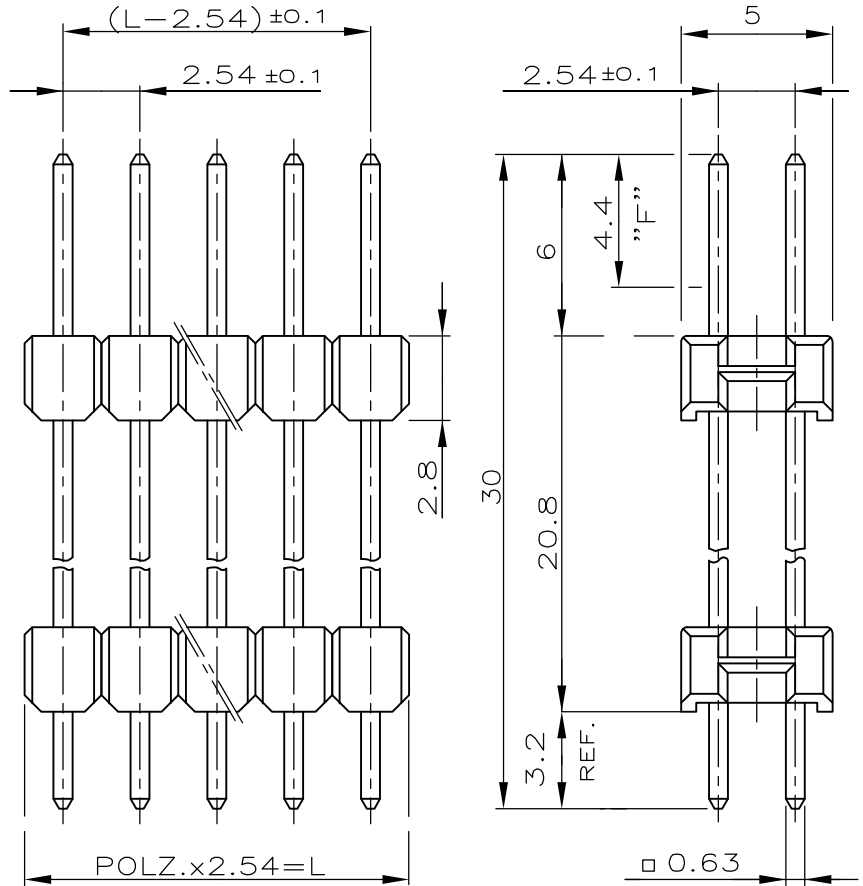

- ① STECKSEITE: IM BEREICH "F" 0.7µm PdNi + 0.1µm GOLD FLASH ÜBER 1.27 µm Ni
- ② LÖTSEITE: MIN. 2.5 µm ZINN ÜBER 1.27 µm Ni
- ③ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

CAD-ORIGINAL
ZEICHNUNG NICHT ÄNDERN

KONTAKTSTIFT	CuZn	①
STIFTGEHÄUSE	PBTP-GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB 26/90...

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED.

DIMENSIONS: mm	DWN	12.03.87	MATERIAL	SEE TABLE	FINISH	SEE TABLE
	CHK	19.03.87	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	—				
±0.2 mm	PRODUCT SPEC	108-18012	NAME	SPEZ. AMPMODU II STIFTELEISTE ZWEIREIHIG		
0 PLC ± -	APPLICATION SPEC	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
1 PLC ± -	WEIGHT	—	A4	00779	C-829033	—
2 PLC ± -	CUSTOMER DRAWING	SCALE		4:1	SHEET	1 OF 1
3 PLC ± -						REV
4 PLC ± -						E
ANGLES ± -						