


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50	Y3	REVISED PER ECR-18-006427	14MAY2018	BW SV

- 1 CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 5.59±0.08 [.220±.003] CENTERS.
- 2 AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.
- 3 SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRE OF THE SAME SIZE AND TYPE.  
 COPPER RANGE: 0.36-0.57mm [#27-#23] AWG.  
 ALUMINIUM RANGE IS 0.51-0.64mm [#24-#22] AWG.  
 ALUMINIUM WIRE RANGE IS APPLICABLE FOR POST TIN PLATED PART NOS ONLY.
- 4 TIN PLATE.
- 5 VARNISH RESIST OVER TIN PLATE.

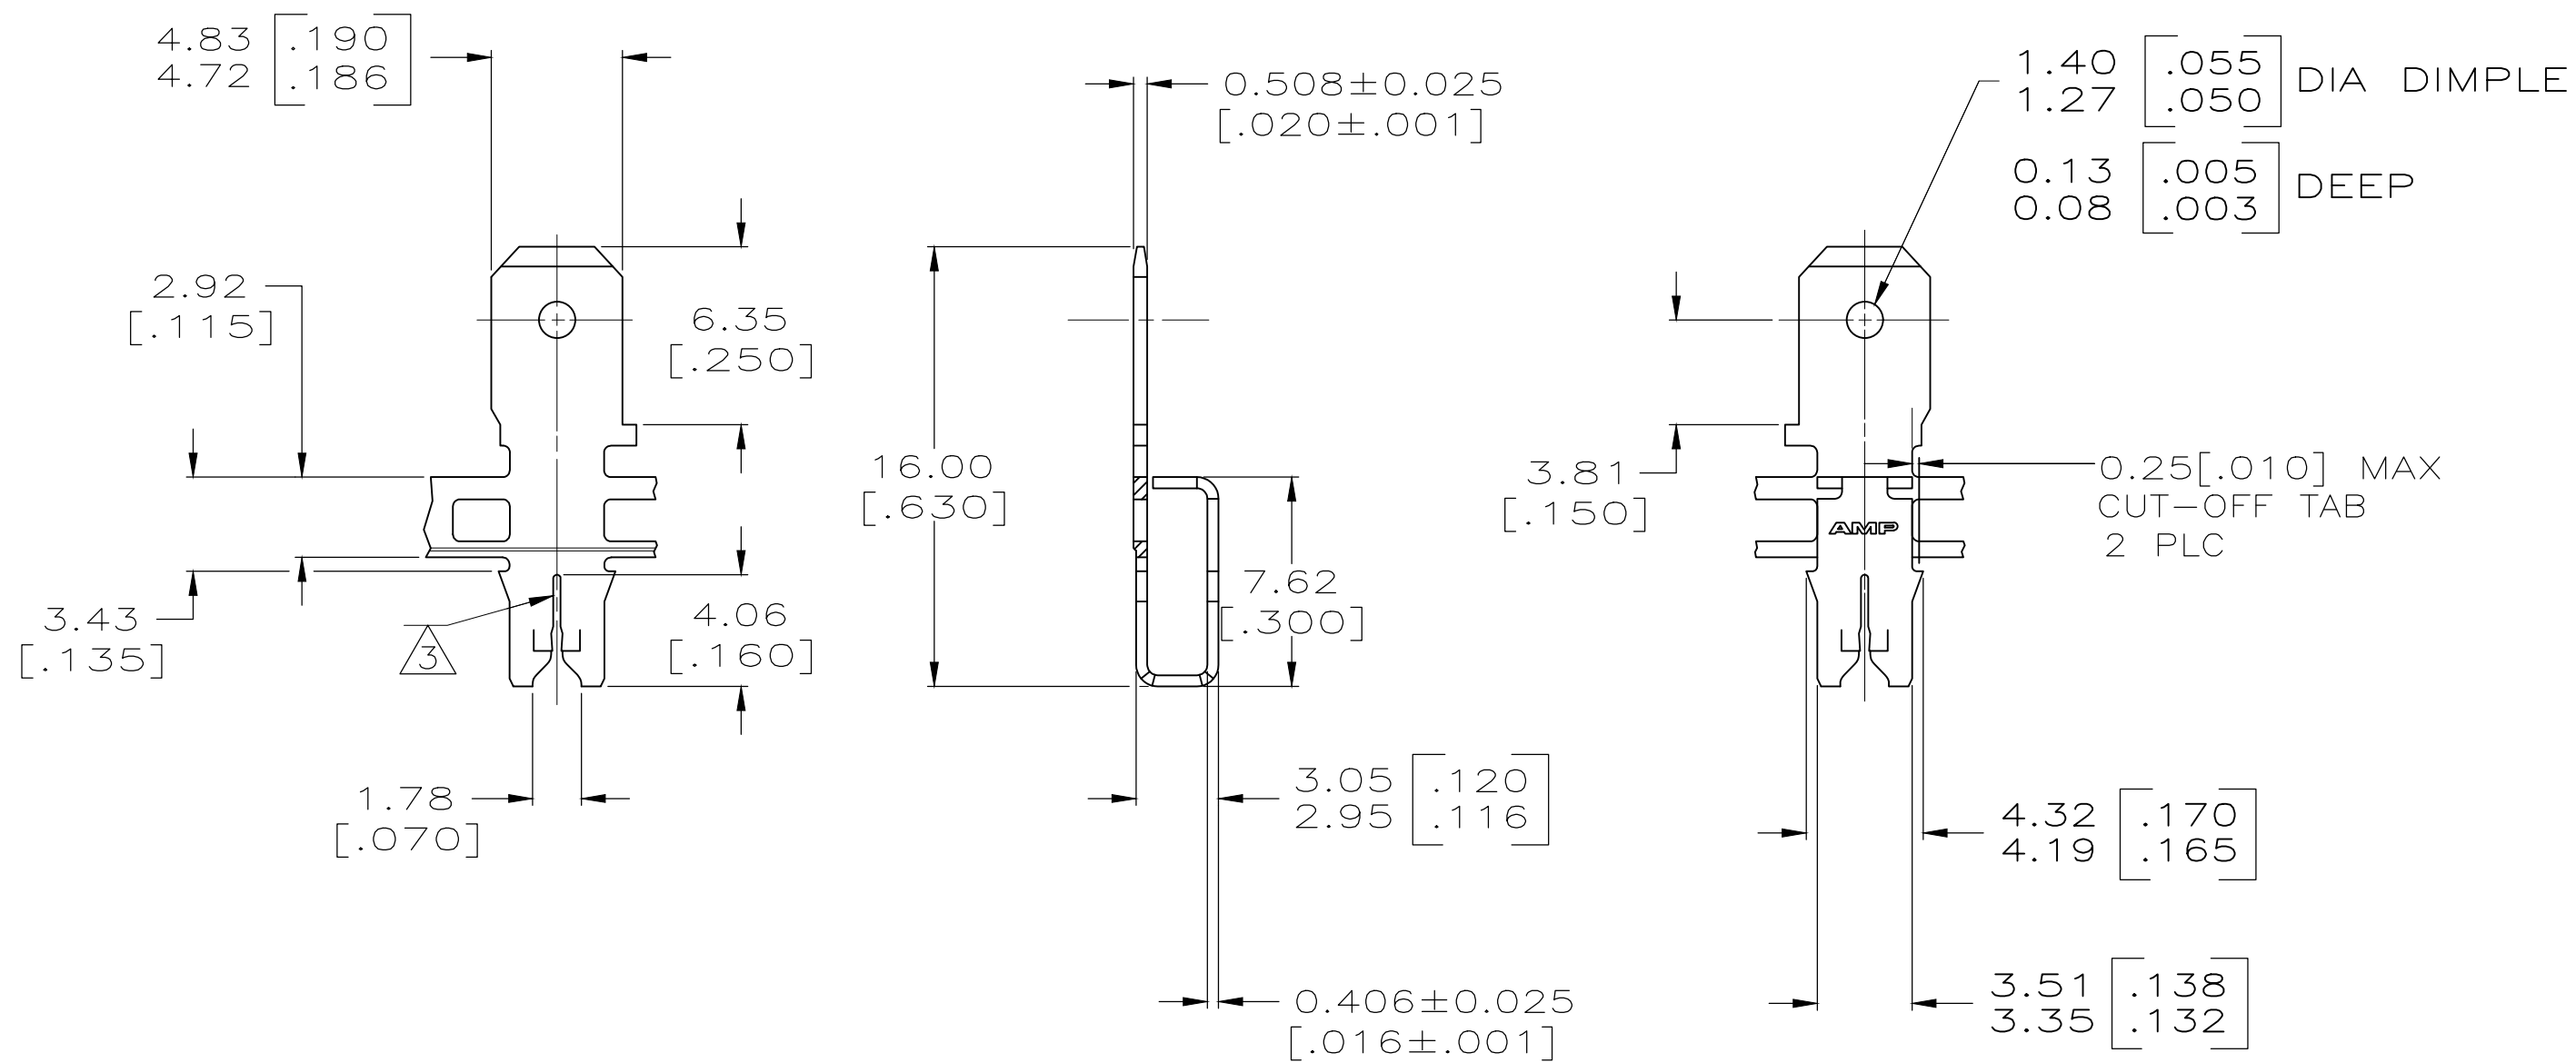

5	62514-2
4	62514-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	07FEB2005	MICHAEL S. FEHER		TE Connectivity		
DIMENSIONS: INCHES		CHK	07FEB2005	KURT A. RANDOLPH		NAME		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	07FEB2005	KURT A. RANDOLPH		PRODUCT SPEC		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.25[.010] 4 PLC ± - ANGLES ± -		APPLICATION SPEC		108-2012		TAB, .187 FASTON, 300 SERIES MAG-MATE		
MATERIAL	BRASS	FINISH	SEE TABLE	WEIGHT	-	SIZE	A2	
CUSTOMER DRAWING		SCALE		4:1	SHEET	1 OF 1	REV	Y3