
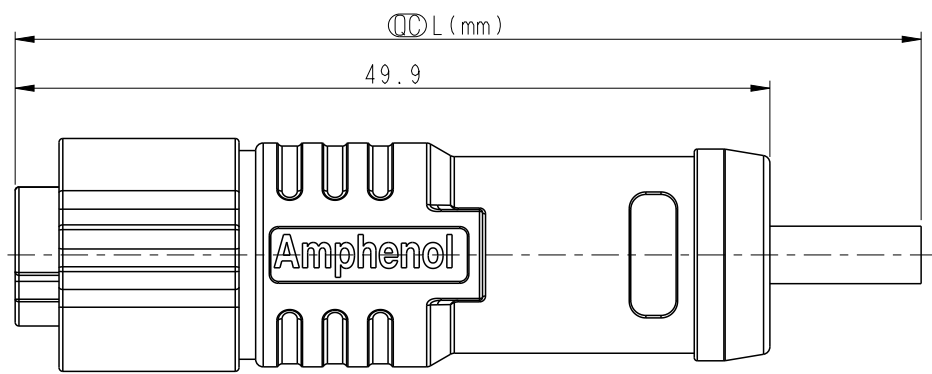



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

2P	PUR	3.8	26	ASD-02BFFM-QL8PXX
Contacts	Cable Jacket	Cable OD	AWG	Item No.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2022-03-17	Sam Ho	Rev.01 to A, Initial Released



ASD-XXBFFM-QL8PXX  
 XX:L=0~15Meters  
 01:L=1Meters  
 02:L=2Meters  
 ⋮  
 15:L=15Meters  
 XX:No. Of Pin

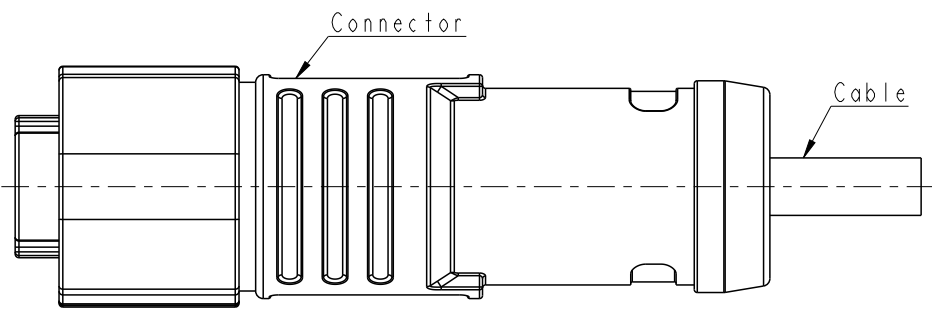

Shield Braid 編織	
3 White 白	Twist
1 Blue 藍	
Pin #	Wire
2P	
Pin Assignments Front View	

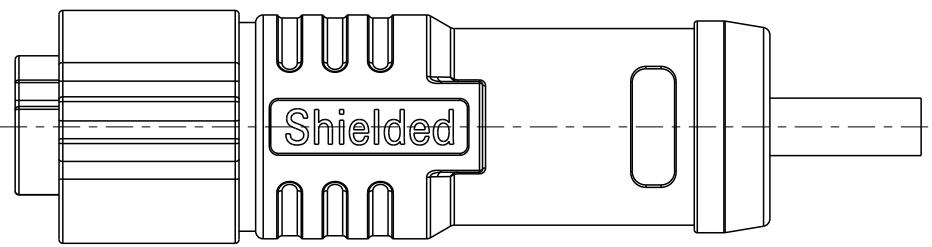

- Note:
- \* RoHS Compliant
  - \*  $\varnothing$  Important dimension
  - \* Waterproof rate: IPX8, mated 1m/24h
  - \* Connector
    - Housing: Thermoplastic, Black
    - Pin: Copper alloy, Gold plated
    - Shield: Metal
    - Nut: Metal
    - Outer mold: Thermoplastic, Black
  - \* Cable: IEC61156-12, 26#\*1P+AL/MY+B, PUR Jacket, OD 3.8mm, GN.
  - \* Cable length tolerance:
    - 1M: +50/-0 mm
    - 1M < L ≤ 3M: +100/-0 mm
    - 3M < L ≤ 5M: +150/-0 mm
    - 5M < L ≤ 10M: ±100 mm
    - 10M < L ≤ 15M: ±200 mm

UNIT:mm		
TOLERANCE ±0.50mm		

TITLE XLOK, A SHLD-5A, 02P, CABLE W/O SR			
SCALE 2:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV.	$\varnothing$ : Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Sam Ho	DATE 2022-03-17
DWG NO. ASD-XXBFFM-QL8PXX	CHECKED BY Fred Lee	DATE 2022-03-17
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2022-03-17