
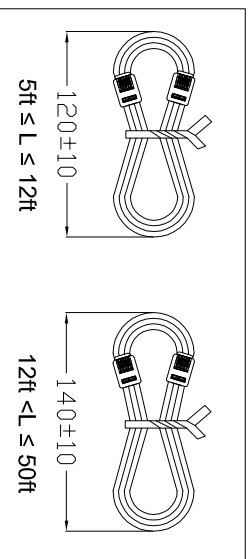



Conductor: [26AWG(0.16/7)Bare Copper]x4C

Insulation: [PE6331 ID:0.95±0.03]x4C

Jacket: PVC NON-UL 65F

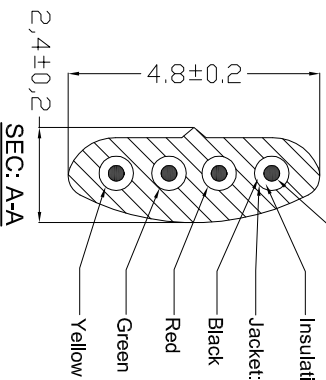

Note for plug:

Material:
 Housing-Polycarbonate, clear.
 Terminal-0.36[.014] thick phosphor bronze.
 Thick gold in localized gold plate.
 Area, Gold flash over the remainder.
 Over 2.54mm[.000100] thick nickel underplate

Order code: AT-S-26-4/4/X-XX

Order color:
 B: Black
 W: White
 S: Silver

Length Code	Length (mm)
5	1525±20(5FT)
7	2135±30(7FT)
10	3050±60(10FT)
12	3660±60(12FT)
14	4270±60(14FT)
25	7625±100(25FT)
50	15250±150(50FT)

RoHS compliant

Unit: mm

Scale	Free
TOLERANCE	
.X	±0.50
.XX	±0.20
DIM	TOL
Angle	±2°

Id.	Modification	Date	Name
①	Drawn	18.12.2017	Amy

Date	Name
Drawn 18.12.2017	Amy
Approved 18.12.2017	Amy

ASSMANN
 components

Customer-No.	
ASSMANN WSW-No.	
AT-S-26-4/4/X-XX	
Drawing-No.	
ASS 8166 CA	rev00
Replace	

1 2 3 4 5 6 7

A B C D E F G H