

MS Lithium Rechargeable Battery MS920T

SPECIFICATIONS

Type	MS920T
Nominal Voltage(V)	3
Charge Voltage (Standard Charge Voltage) (V)	2.8 to 3.3 (3.1)
Nominal Capacity(mAh)	6.5
Internal Impedance(Ω)	60
Standard Charge Discharge Current(mA)	0.025
Maximum Discharge Current (Continuous) (mA)	0.40
Cycle Life (Time)100% D.O.D(Depth of Discharge)	100
Cycle Life (Time)20% D.O.D(Depth of Discharge)	1000
Size Diameter(mm)	9.5
Size Height(mm)	2.0
Weight(g)	0.45




Backup Time

Type

Charge Voltage v



Stop Voltage v

Current A μA



CHARACTERISTICS

Click to enlarge.

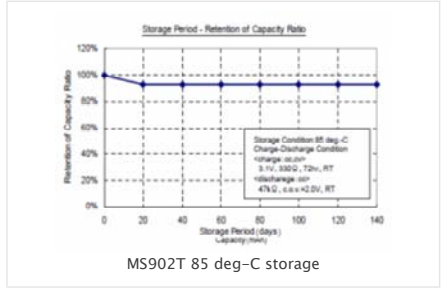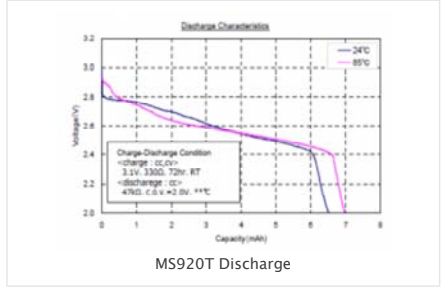

Please contact us for more details.