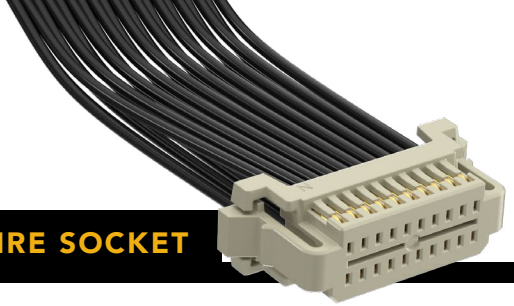
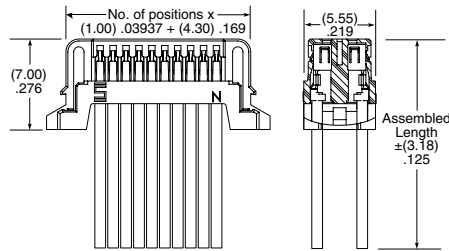



## (1.00 mm) .0394" PITCH • DOUBLE ROW DISCRETE WIRE SOCKET



SERIES	PINS PER ROW	WIRE GAUGE	PLATING OPTION	ASSEMBLED LENGTH	WIRING OPTION
<b>S1SD</b> = Double Row PVC Cable	<b>-02, -03 -04, -05, -10, -15, -20</b> (Standard sizes)	<b>-28</b> = 28 AWG  <b>-30</b> = 30 AWG	<b>-GF</b> = 3 μ" (0.07 μm) Gold on contact and tail	<b>-"XX.XX"</b> = Assembled Length in Inches (45.72 mm) 01.80" min.	Double Ended Assemblies  <b>-L1</b> = Pin 1 to Pin 1  <b>-L2</b> = Pin 1 to Pin 2  <b>-L3</b> = Pin 1 to Pin N  <b>-L4</b> = Pin 1 to Pin N-1  Single Ended Assembly  <b>-L</b> = Latching
<b>S1SDT</b> = Double Row Blue *Teflon® Cable					

**S1SD(T)**  
Board Mates:  
**T1M**  
Cable Mates:  
**T1SD(T), T1PD(T)**





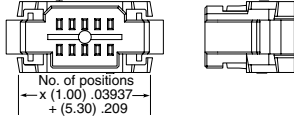

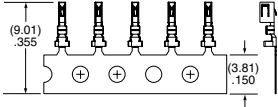
### SPECIFICATIONS

**Insulator Material:**  
Natural Nylon  
**Contact Material:**  
Phosphor Bronze  
**Plating:**  
Au over 50 μ" (1.27 μm) Ni  
**Operating Temp Range (S1SD(T)/T1M):**  
-10 °C to +85 °C (PVC)  
-40 °C to +125 °C (Teflon®)  
**Current Rating (28 AWG):**  
2.3 A per pin  
(2 pins powered)  
**Voltage Rating:**  
250 VAC/353 VDC  
**Wire:**  
28 or 30 AWG

\*DuPont™ Teflon® is a registered trademark of the E.I. du Pont de Nemours and Company or its affiliates.

**Note:**  
Teflon® cable is intended for crimp only. Contact Samtec for solderable cable applications.

View complete specifications at: [samtec.com?S1SD](http://samtec.com?S1SD) & [samtec.com?S1SDT](http://samtec.com?S1SDT)

SERIES	NO. OF POSITIONS	SERIES	01	PLATING
<b>ISD1</b> = Double Row Body	<b>-02, -03, -05, -07, -10, -15, -20</b> (Per Row)	<b>CC09R</b> = Contact, Full Reel (25,000 Parts per Reel)		<b>-GF</b> = 3 μ" (0.07 μm) Gold contact and tail
		<b>CC09M</b> = Contact, Mini Reel (5,000 Parts per Reel)		
	 			

### TOOLING

Hand Tool: CAT-HT-309-2830-12

Clamp for mounting hand tool: CAT-HT-MNT-01

Mini Applicator: CAT-MC-309-2830-XX-01

**Note:**  
Some lengths, styles and options are non-standard, non-returnable.

View complete specifications at: [samtec.com?ISD1](http://samtec.com?ISD1), [samtec.com?CC09R](http://samtec.com?CC09R) & [samtec.com?CC09M](http://samtec.com?CC09M)