



RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NO.S FOR REF ONLY.
4. RATING: AC 250V 5A/80A, TV-5
5. CONTACT RESISTANCE: 100m Ohms MAX. (AT DC 5V@1A)
6. DIELECTRIC STRENGTH: AC 1000V
7. OPERATING FORCE: 350±100gf
8. TRAVEL: FULL STROKE: 3.5±0.5/-0mm
LOCK STROKE: 2.5±0.5mm

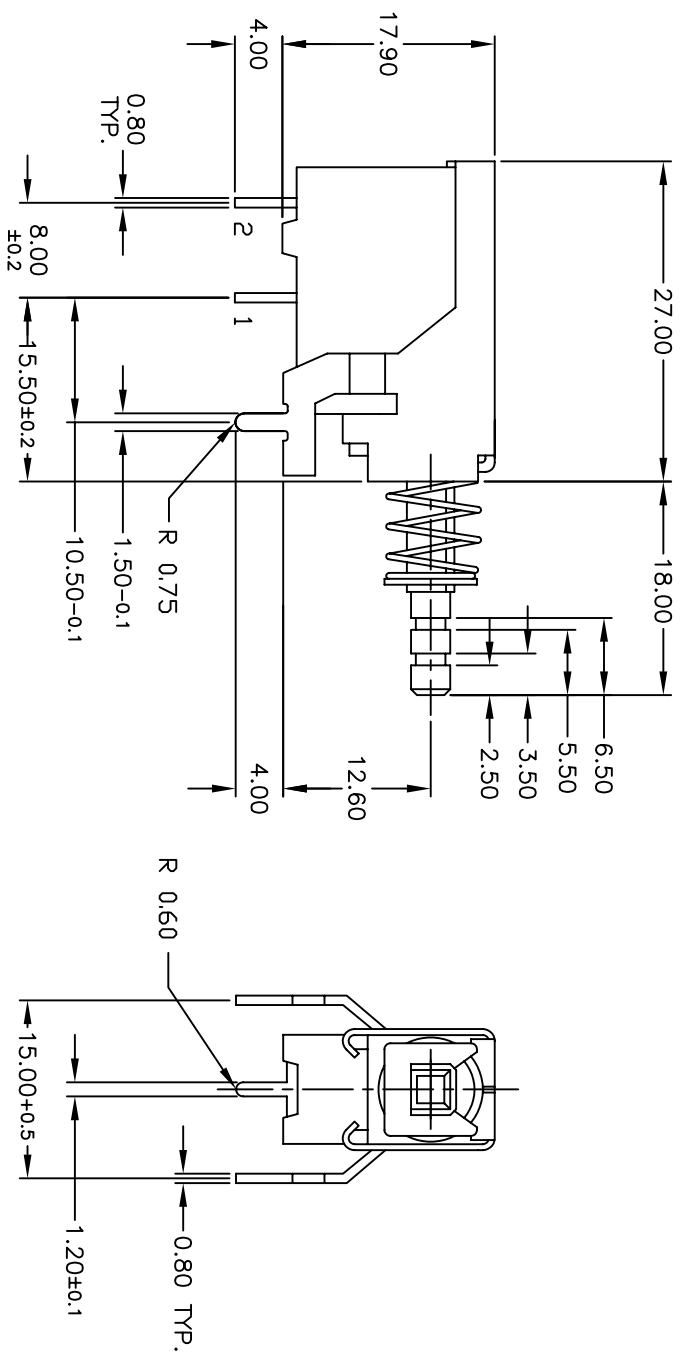

E-SWITCH®

| | | | | | | | | | |
|---|--|---------|---------------------|---------|------|-------|---------|------------|---------|
| C | | 15746 | EDIT PC LAYOUT | 2/8/06 | PH | TITLE | | P197 EE PD | |
| B | | 11208 | REVISED AND REDRAWN | 1/31/01 | CJB | SCALE | DATE | DR | DWG |
| REV. | | ECN NO. | DESCRIPTION | DATE | CHKD | 1.5:1 | 1/31/01 | CJB | P030055 |
| <p>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</p> | | | | | | | | | |
| | | | | | | | | | REV |
| | | | | | | | | | C |