

SECTION A-A

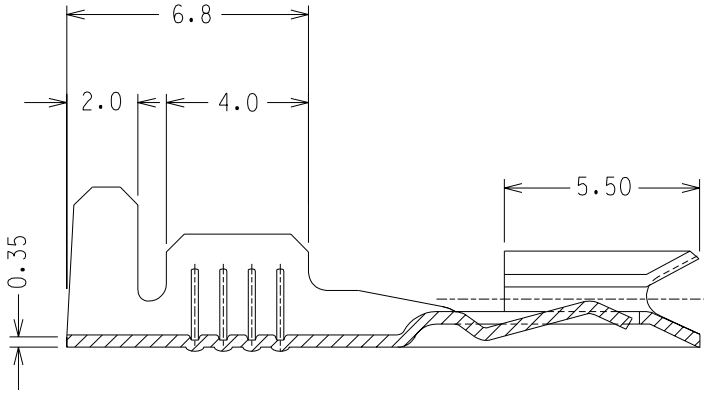



SECTION B-B

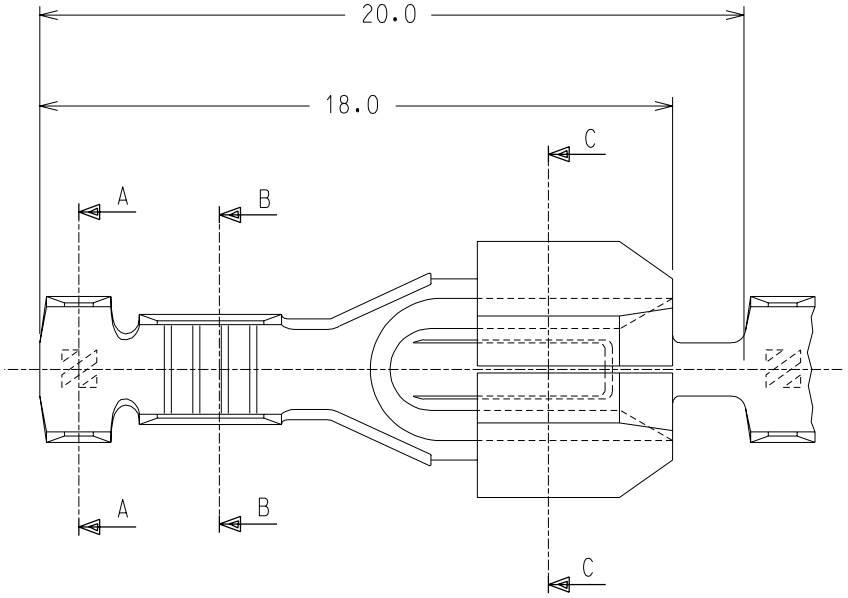

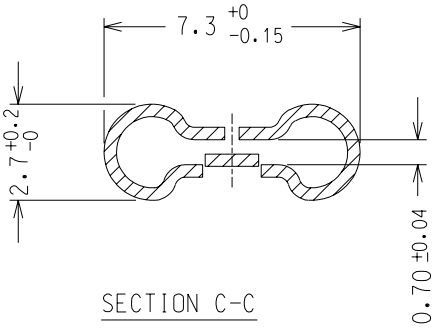

SECTION C-C

TIPO di CAVO *TYPE of CABLE*	Ø ISOLANTE *Ø INSULATION*	CODICE *P / N*	A	B
ISOLANTE STANDARD *STANDARD INSULATION*	2.0 - 3.6	94030-7970	4.1	4.5
ISOLANTE RIDOTTO *REDUCED INSULATION*	1.5 - 2.4	94030-7975	3.4	3.6

MATERIALE: BRONZO FOSFOROSO
MATERIAL: PHOSPH. BRONZE

FINITURA: STAGNATO
PLATING: TIN

CARATTERISTICHE TECNICHE:
SECONDO CAP. FIAT 9.91320/02 -ALL. 7-

REVISE ONLY ON CAD SYSTEM | SH. | REV.

EC N: Z2004-0224
GZUIN 2004/04/28
C1

REVISIONS
LTR

DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED TOLERANCES ANGULAR ±

	INCH	(METRIC)
3 PLACE	±	
2 PLACE	±	± 0.1
1 PLACE		± 0.2

DESIGN DIMENSION (PRIMARY) ☒ (MM) ☐ IN

EQUIVALENT DIMENSION (SECONDARY) ☐ (MM) ☐ IN.

DRWG BY: Gottardo
CHK'D BY:
APP'D BY: Previato
SCALE: 5:1

CADCAM FILENAME: CAD FILE Z307970S

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

TITLE
CAPOCORDA FEMMINA PER MASCHIO DA 5 X 0.8
QIK KONNECT RECEPTACLE FOR 5 X 0.8 TABS
SEZ.RAME/*WIRE RANGE*: 0.5-1.5 mm²

MOLEX INCORPORATED

SHEET NO.: 1/1
DATE: 16-07-90

PART NO.: vedere tabella *see chart*
DWG NO.: SD-94030-797
SIZE: A