
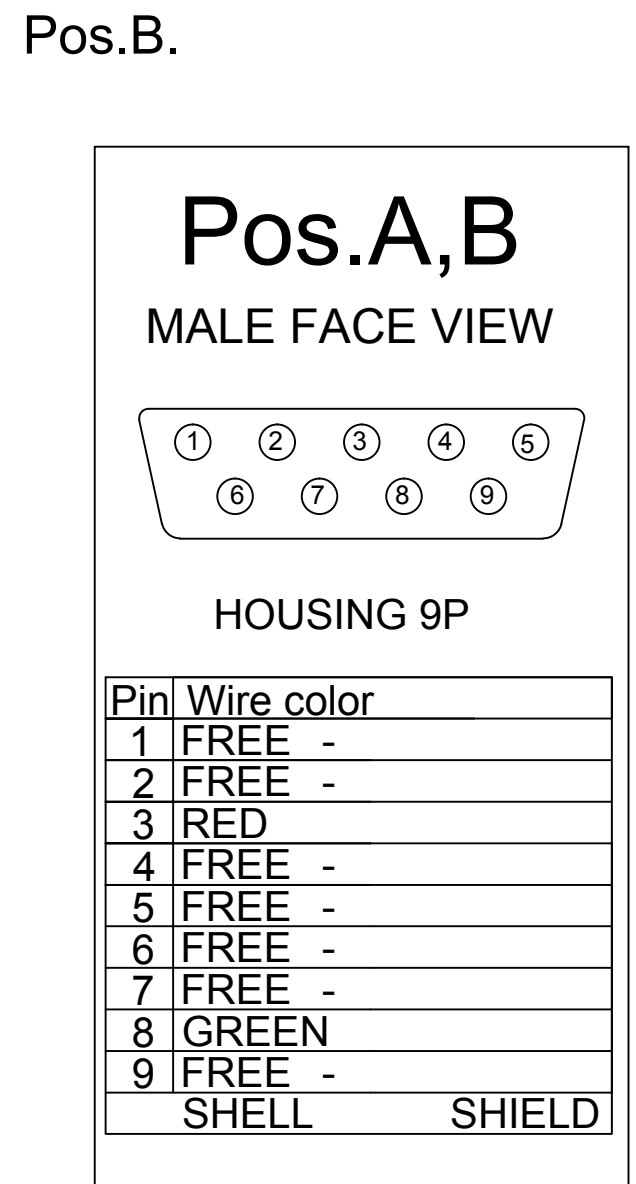
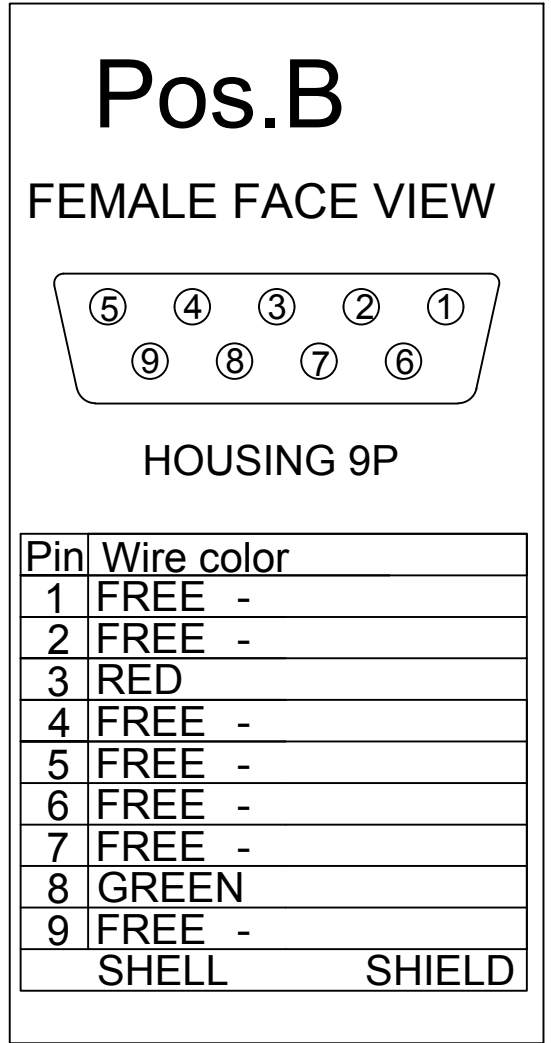


13	12	11	10	9	8	7	6	5	4	3	2	1
MATERIAL NUMBER	OLD PART NUMBER	FINISHED LENGTH										
1200980122	MP3S63PP4M020	2M +88.9mm -0 [6.6 FT. +3.5IN -0]										

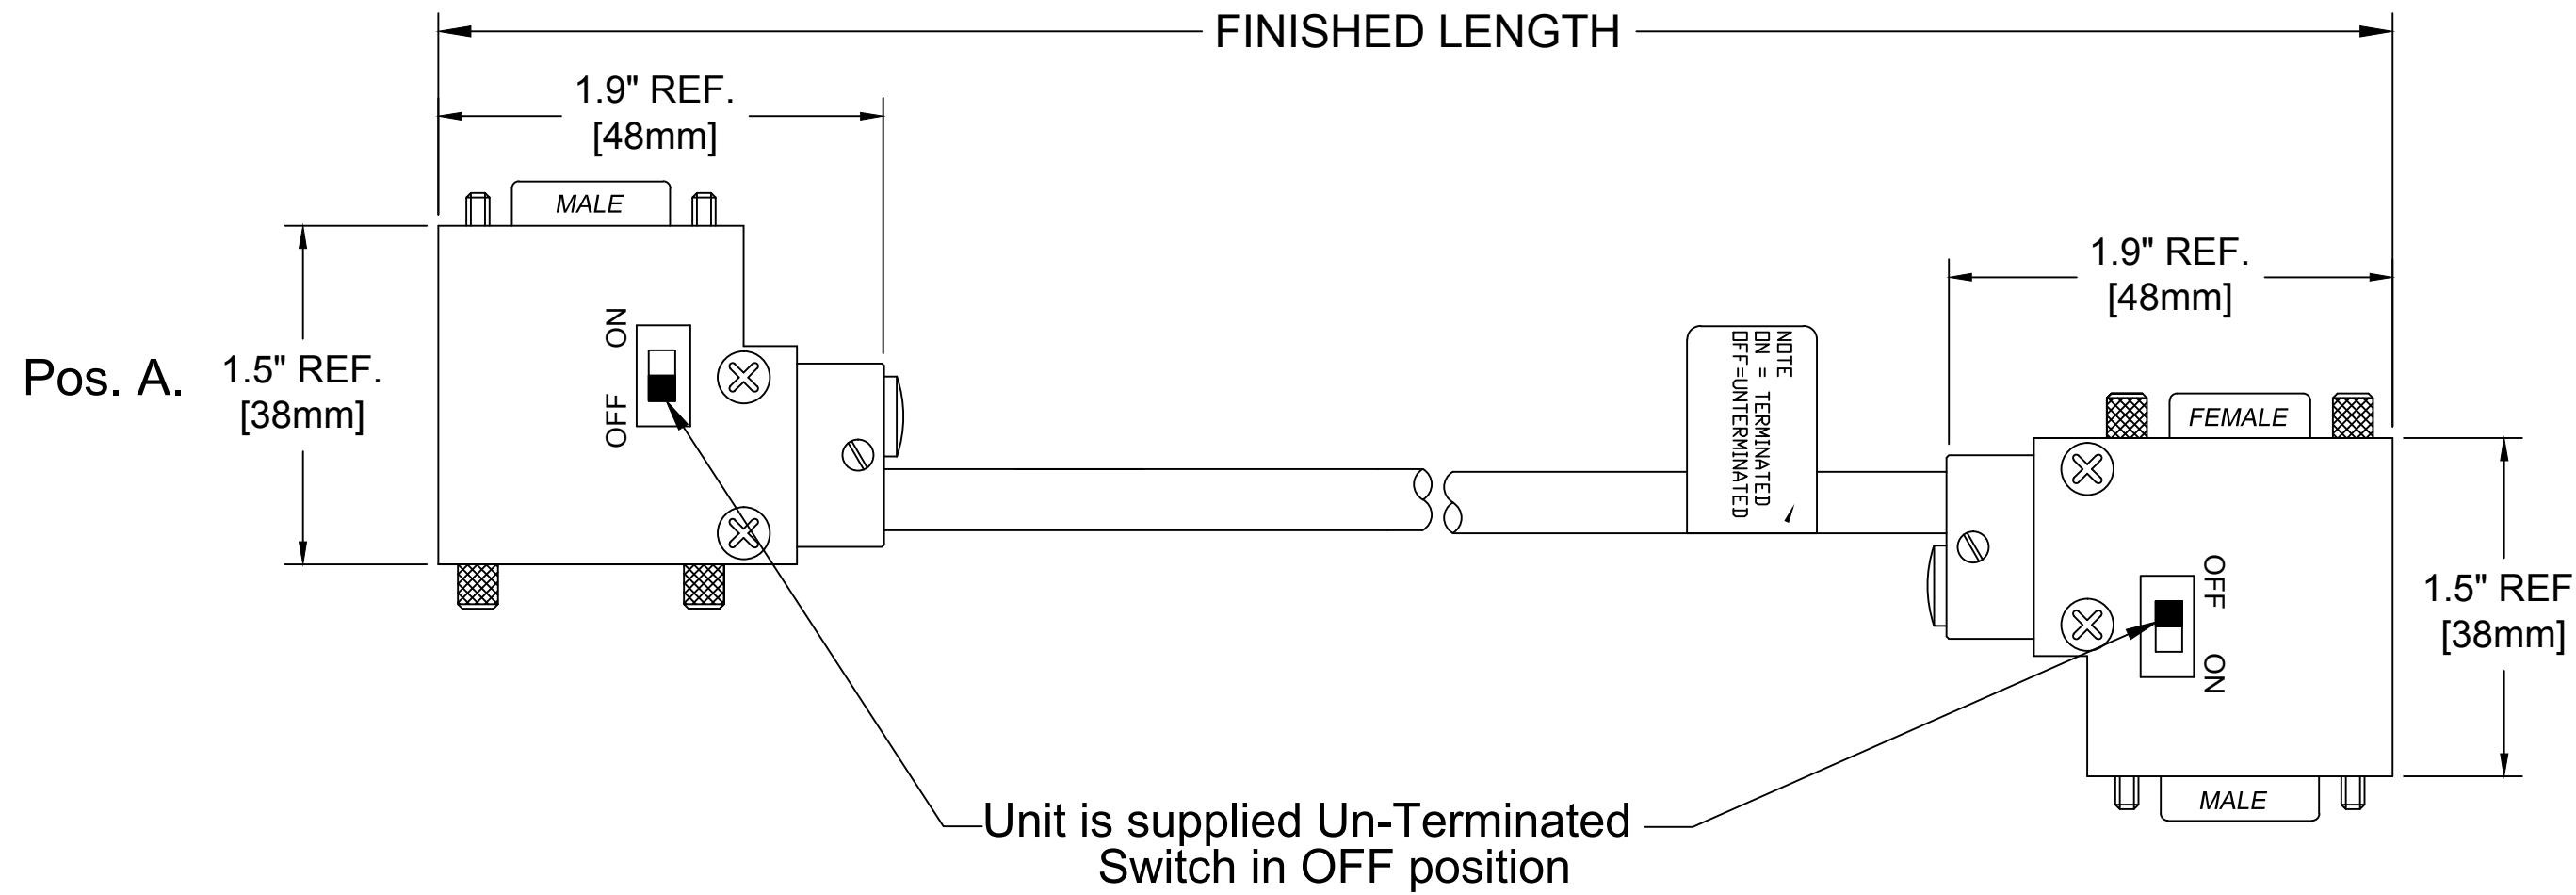

WIRING DIAGRAM

1	NOT CONNECTED	1
2	NOT CONNECTED	2
3	RED (LINE B)	3
4	NOT CONNECTED	4
5	NOT CONNECTED	5
6	NOT CONNECTED	6
7	NOT CONNECTED	7
8	GREEN (LINE A)	8
9	NOT CONNECTED	9

MP3S63PP4M020

cable type Profibus Cable PUR
cable length 020----2 Meters

VOLTAGE RATING	250 VAC/VDC
AMPERAGE RATING	4 AMPS
PROTECTION FOR D-SUB	IP40
OPERATING TEMPERATURE	0°C TO 60°C

COMPONENT	MATERIAL	FINISH
CABLE- 22 AWG, COPPER STRANDING) TWISTED PAIR SHIELD WITH BRAID	PUR	PURPLE
LABEL	MLYAR	BLACK/YELLOW
D-SUB	ABS	BLACK
CONTACT	COPPER ALLOY	AU OVER NI

RELEASE EC NO.: ICG2014-0577 DRWN: GGUSTAFS 2013/09/16 CH'KD: BARDEN APPR: BWOODMAN2013/10/31 REV	QUALITY SYMBOL	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	4 PLACES	IN/MM	NTS	INCH	
	∇=0	3 PLACES	mm INCH	DRAWN BY	DATE	TITLE
		2 PLACES	±--- ±---	GGUSTAFS	2013/09/16	PROFIBUS-9PIN D-SUB VERT/ D-SUB VERT PP4-PUR
		1 PLACE	±0.13 ±0.010 ±0.25 ±0.020	CHECKED BY	DATE	
		ANGULAR ±.5°	BARDEN	2013/11/25	MOLEX INCORPORATED	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	APPROVED BY	DATE	MATERIAL NO.	SHEET NO.
			BWOODMAN	2013/10/31	SEE CHART	1 OF 1
			THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DOCUMENT NO.	
					SD-120098-043	