



specifications

Consumption	Lumen Output	Efficacy	Voltage	Lens	Heat Sink	L70 hours	Ambient Temp (F)	Power Factor	UL listing	CRI	THD	Dimensions
30W	3,750	125 LM/W	100-277 V ⚡	polycarbonate	aluminum	50,000	-4° - 113°	>0.9	wet location IP65	83	<20%	47.24" x 1.69" x 1.45"

select your lamp

Part Number	Color Temp	
GI-4DT5D-W60P-BFWS	3000K	S
GI-4DT5D-W60P-BFWL	3000K	L
GI-4DT5D-D60P-BFWS	4000K	S
GI-4DT5D-D60P-BFWL	4000K	L
GI-4DT5D-C60P-BFWS	5000K	S
GI-4DT5D-C60P-BFWL	5000K	L

**L** linkable (middle piece with cables on both ends)  
**S** single side cable (end piece)

Features

- > Linkable up to 200W
- > 80% energy savings compared to HID technology
- > 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- > Includes a 30" cable

add your accessories\*

Accessories Part Number	
GI-ACC-SUS-DT5	suspension kit (includes cables)
GI-ACC-MC-T8	magnetic clip




\*optional

other


Warranty	Weight	Case QTY
6 years	1.10 lbs	20 pcs



Light Distribution Curve

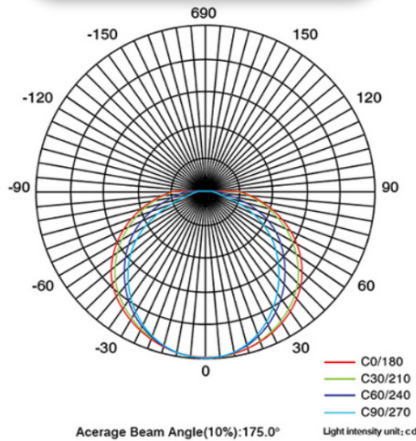

Lux vs Distance

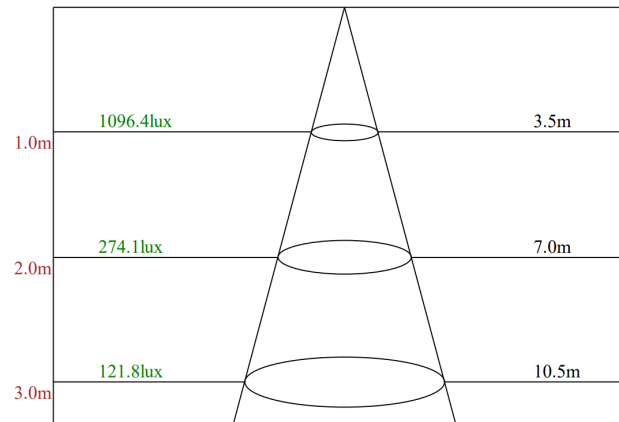

Included accessories:  
\* screws & clips



Not all product variations listed on this page may be DLC qualified. Visit [www.designlights.org/search](http://www.designlights.org/search) to confirm qualification.

