



Electrical specifications

Cut-off Frequency: 150 MHz
Passband: DC-150 MHz
Insertion loss: <0.75 dB
Return loss: >20 dB
Rejection : ≥ 50 dB @ 299.994–600.012 MHz
Power Handling: 200 Watts


Mechanical

Connector Type: N-Type (F)
Dimensions: 4.00 x 2.00 x 1.00 Inches

Environmental

Operating Temperature: -40°C to +70°C
Storage Temperature: -55°C to +85°C
Shock: 10 G. 11ms
Vibration: 10 G. 5 to 200 Hz

Outline Drawing:

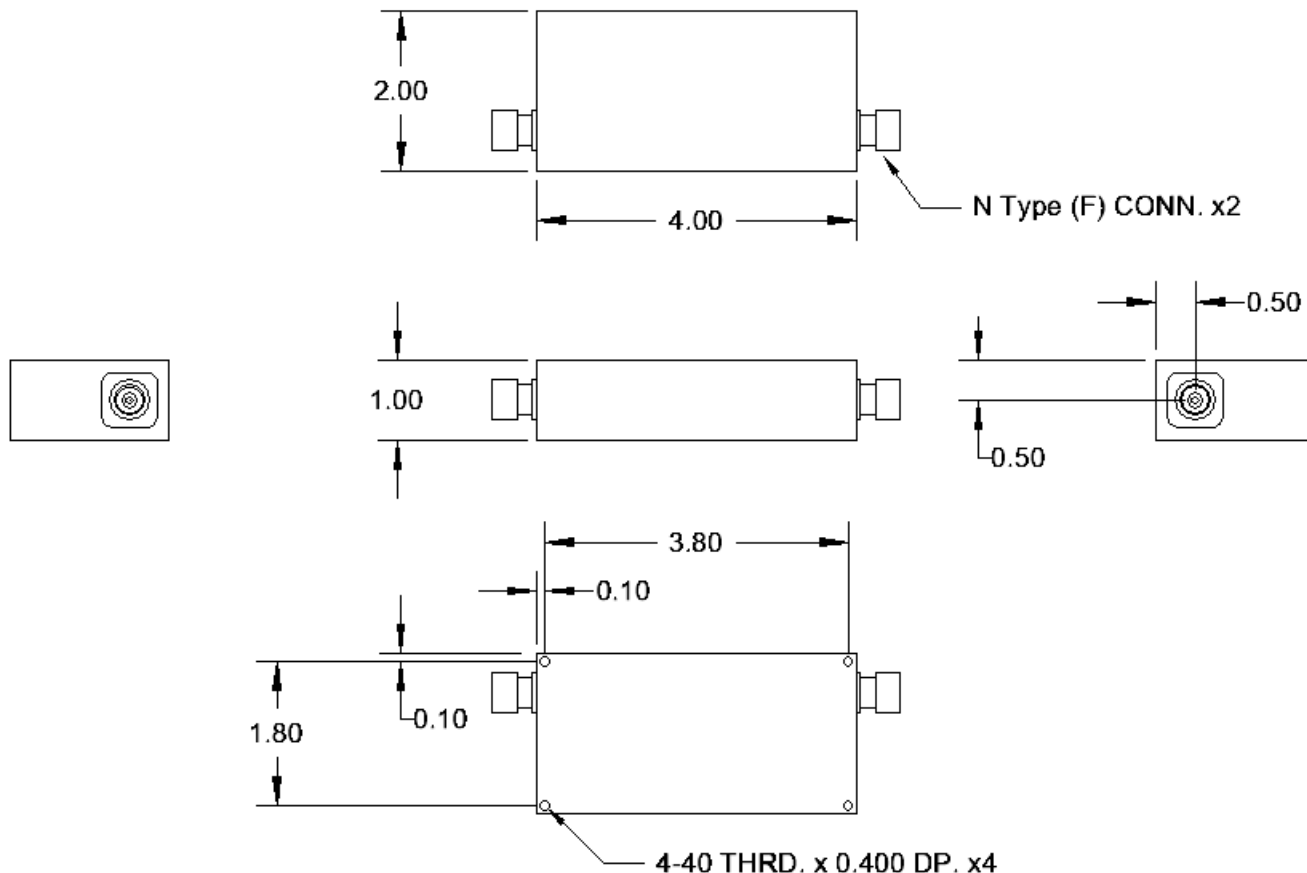

Rev A 03162021