

**Cornell Dubilier**

Cornell Dubilier Marketing, Inc  
Liberty, South Carolina  
TEL: 864-843-2277 FAX:864-843-3800

Engineering

Catalog Number: DCM302T350DP2B

Customer Part Number: \_\_\_\_\_

Date: 1/20/2023

Capacitance: 3000 $\mu$ F

Tolerance: - 10% + 50%

Working Volts: 350 VDC

Surge Volts: 400 VDC

Leakage Current @ 25°C: 6000 $\mu$ A

ESR @ 120 Hz @ 25°C: 0.049 $\Omega$  max.

Ripple Current @ 120 Hz, 85°C: 11.5A

Diameter (D): 3.00  $\pm$  0.031 inches

Length (L): 5.875  $\pm$  0.062 inches


Total Length, W/Insulation (TL): 6.126  $\pm$  0.062 inches

Terminal Spacing (S): 1.25  $\pm$  0.015 inches

Terminal Thread (T): 10-32 UNF

Insulation: PVC

Operating Temperature: - 40°C ~ +85°C

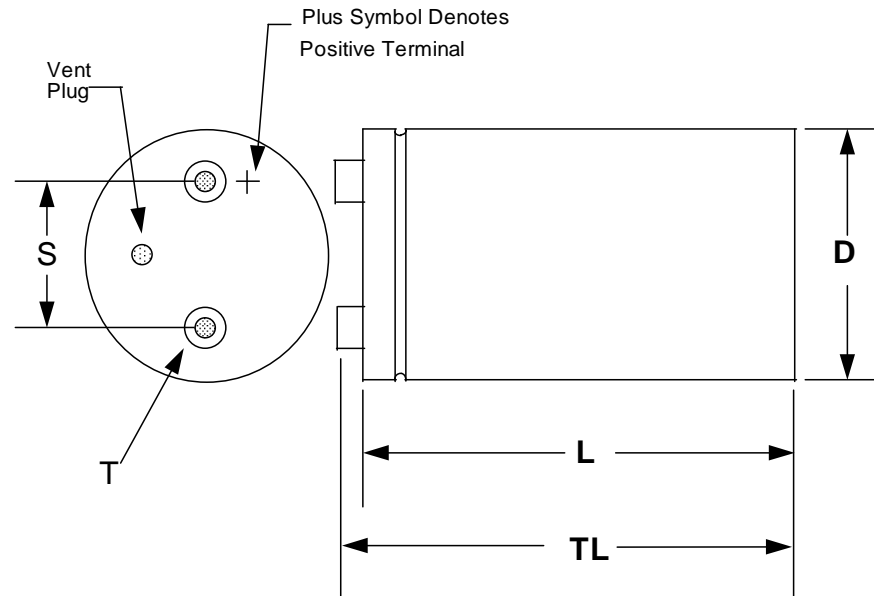

ROHS Compliant for all date codes after "0513",  
Per provisions of CD document 10-28.

"Controlled Copy" if viewed on CD Server or if copy is stamped  
in Red, Otherwise considered as an "Uncontrolled Copy"