


## T340B155M040AT

T340, Tantalum, MnO<sub>2</sub> Tantalum, Commercial Grade, 1.5 uF, 20%, 40 VDC, Lead Spacing = 5mm

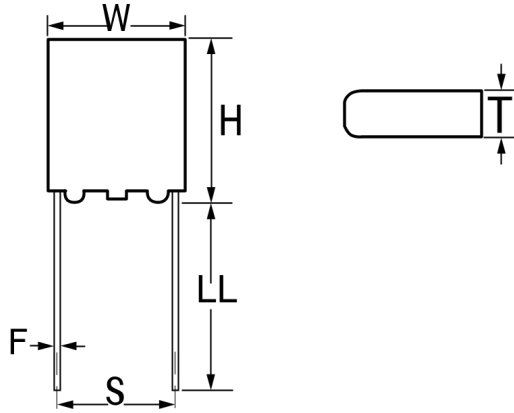

Click [here](#) for the 3D model.

### Dimensions

W	7.2mm MAX
H	8.3mm MAX
T	4mm MAX
S	5mm +/-0.5mm
LL	15mm +/-2mm
F	0.5mm +/-0.03mm

### Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	300

### General Information

Series	T340
Dielectric	MnO <sub>2</sub> Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	Yes
Termination	Tin
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

### Specifications

Capacitance	1.5 uF
Capacitance Tolerance	20%
Voltage DC	40 VDC (85C), 26 VDC (125C), 0.4 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	6%
Leakage Current	1 uA