





Data sheet | Item number: 756-5301/030-100

Sensor/Actuator cable; M12A socket; straight; 3-pole; Length: 10 m

www.wago.com/756-5301/030-100

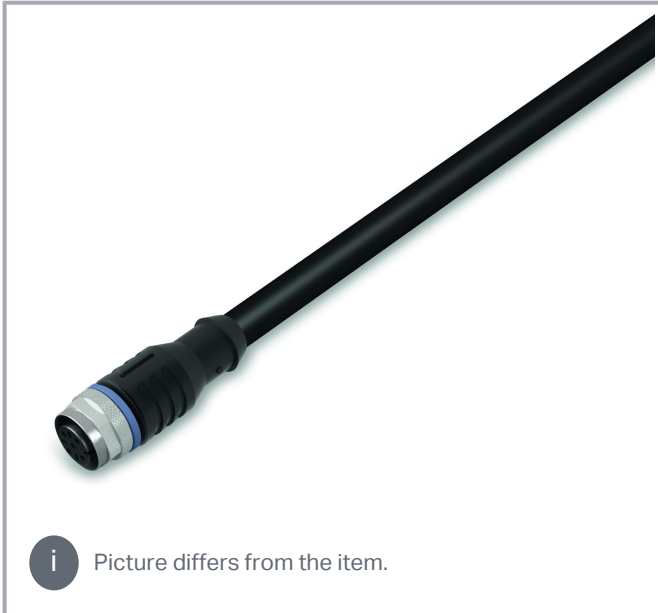

i Picture differs from the item.

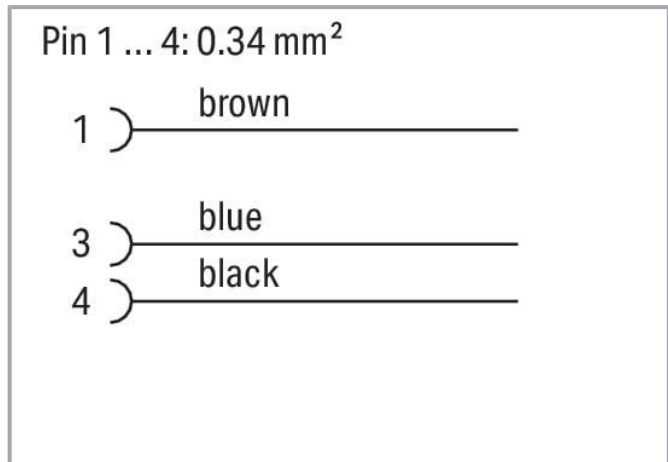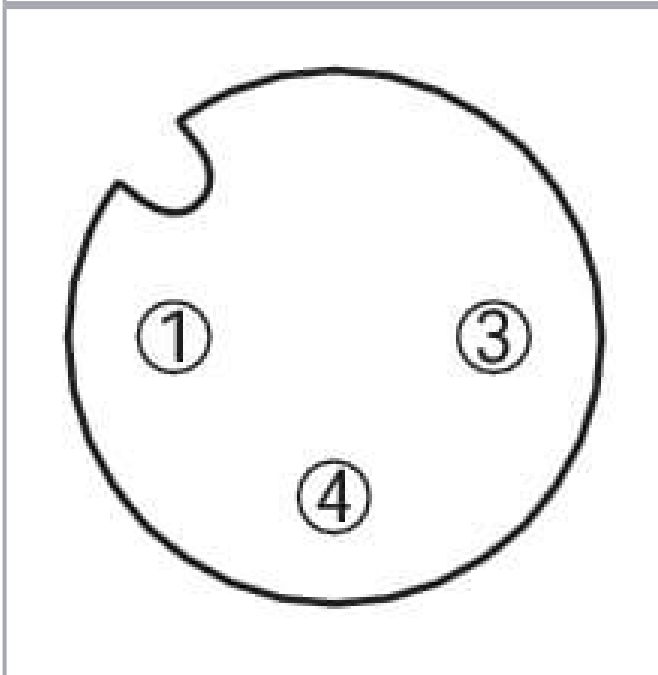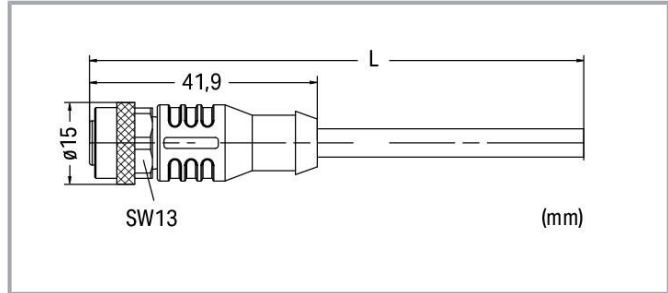

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Item description

Short description:

- PUR, halogen-free
- Suitable for drag chains
- High resistance to microbes, hydrolysis, oil, chemicals and UV radiation
- High chemical resistance
- Cable used: UL listed

Data

Technical data

General

Operating voltage	250 VAC/DC
Operating current	4 A
Rated surge voltage	2.5 kV
Contact resistance	10 mΩ
Conductor resistance	≤ 60 Ω/km
Pollution degree	3 per VDE 0110
Protection type	IP67
Ambient (operating) temperature (static)	-50 ... +90 °C
Ambient (operating) temperature (dynamic)	-25 ... +90 °C

Suitable for drag chains

Bending radius	10 x cable diameter (min.)
Bending cycles	2 Mio.
Acceleration (min.)	5
Travel speed (max.)	3.33
Travel path (horizontal) max.	5
Travel path (vertical) max.	2
Torsional capacity	180

Cable

Cable length	10 m
Type code	LiF9YH-11YH or LiF9YC11YFHF

Subject to changes. Please also observe the further product documentation!



Conductor configuration	Bare copper wire, fine-stranded (42 x 0.1 mm)
Conductor insulation	PP9Y (halogen-free)
Sheath material	Polyurethane (PUR), halogen-free per DIN VDE 0472 Part 815, flame resistant per IEC 332-2, self-extinguishing
Sheathed cable color	black
Sheathed cable diameter	4.1 ... 4.5 mm

Connector

Connection type	M12 Socket - free end
Cable connection direction to mating direction	0°
Connector interface coding (cable/adapter) 1 1	A-coded
Housing material	Polyurethane (PUR)
Contact material	CuSn
Tightening torque	1 Nm

Commercial data

eCl@ss 10.0	27-06-03-11
eCl@ss 9.0	27-06-03-11
ETIM 8.0	EC001855
ETIM 7.0	EC001855
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	HU
GTIN	4045454941994
Customs tariff number	85444290900

Environmental Product Compliance

CAS-No.	7439-92-1
REACH Candidate List Substance	Lead
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	6496fe5f-fdc0-43e5-aff4-17ac1a256900
SCIP notification number (Belgium)	6523fd2f-c4a6-436f-91f4-4e49dddf7892
SCIP notification number (Bulgaria)	2ee0b4df-5d58-427b-80fb-21197b4ef1b8
SCIP notification number (Czech Republic)	238ada1d-0b9b-4853-9c59-4a0cfb4ccad4
SCIP notification number (Denmark)	cebc58c4-2b8a-4030-8201-94d7873cfdc8
SCIP notification number (Finland)	9942e3ae-50b6-41eb-8956-c1bd380c3fce

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com


Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



SCIP notification number (France)	01078ce4-cda3-4039-aeec-a4cd726fceec
SCIP notification number (Germany)	9957518e-b6c2-471a-a3ea-f9047e81f1c9
SCIP notification number (Hungary)	9a9e7521-3270-4080-8c18-43585e3cab3d
SCIP notification number (Italy)	c183be05-d544-40de-b56a-49abbb7b6726
SCIP notification number (Netherlands)	5f60b3a7-2fa6-499e-92b7-89cfab7b15ef
SCIP notification number (Poland)	1d7dfd1-a4f9-4aca-8ad9-e9f6620c2246
SCIP notification number (Romania)	0bbaf818-5637-42c6-8042-3177478638ff
SCIP notification number (Sweden)	dacb8be1-3cf4-4ac9-9de4-7e11f60947e7

Approvals / Certificates

General approvals

Logo	Approval	Additional Approval Text	Certificate name
	UL Underwriters Laboratories Inc.	UL 2238	E519602

Downloads

Documentation

Bid Text

756-5301/030-100 X81 - Datei	2019 Feb 19	xml 3.3 kB	Download
756-5301/030-100 doc - Datei	2017 Sep 20	doc 26.1 kB	Download

System Description

IP67 Cables and Pluggable Connectors	pdf 161.6 kB	Download
--------------------------------------	-----------------	----------

CAD/CAE-Data

CAE data

WSCAD Universe 756-5301/030-100	URL	Download
WSCAD Universe 756-5301/030-100	URL	Download

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
 Hansastr. 27
 32423 Minden
 Phone: +49571 887-0 | Fax: +49571 887-169
 Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
 We are always happy to take your call at +49 (571) 887-44222.



Environmental Product Compliance

Compliance Search

Environmental Product Compliance 756-5301/030-100

URL

Download

Sensor/Actuator cable; M12A socket; straight; 3-pole; Length: 10 m

Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.