


RoHS COMPLIANT

REV	DATE
B	05/20/'21
C	06/18/'21

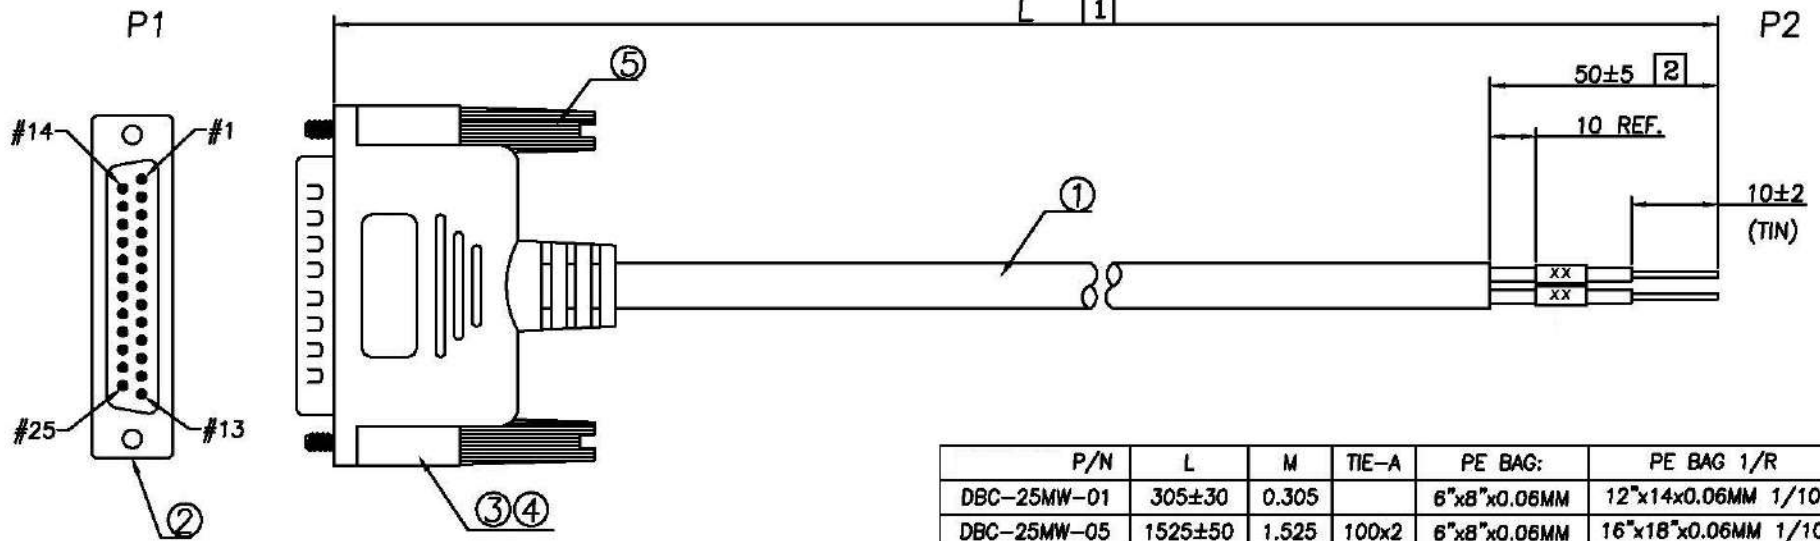

P/N	L	M	TIE-A	PE BAG:	PE BAG 1/R	Q'TY
DBC-25MW-01	305±30	0.305		6"x8"x0.06MM	12"x14"x0.06MM 1/10	A/R
DBC-25MW-05	1525±50	1.525	100x2	6"x8"x0.06MM	16"x18"x0.06MM 1/10	A/R
DBC-25MW-10	3050±50	3.05	120x2	7"x10"x0.06MM	16"x18"x0.06MM 1/10	A/R
DBC-25MW-25	7625±50	7.625		8"x10"x0.06MM	16"x18"x0.06MM 1/5	A/R

PIN ASSIGNMENT

P1	P2	P1	P2	
1	BLACK	P1	14 BROWN/BLACK	P14
2	BROWN	P2	15 RED/BLACK	P15
3	RED	P3	16 ORANGE/BLACK	P16
4	ORANGE	P4	17 YELLOW/BLACK	P17
5	PINK	P5	18 GREEN/BLACK	P18
6	YELLOW	P6	19 BLUE/BLACK	P19
7	GREEN	P7	20 GRAY/BLACK	P20
8	LIGHT GREEN	P8	21 WHITE/BLACK	P21
9	BLUE	P9	22 PINK/BLACK	P22
10	LIGHT BLUE	P10	23 PURPLE/BLACK	P23
11	PURPLE	P11	24 LIGHT GREEN/BLACK	P24
12	GRAY	P12	25 LIGHT BLUE/BLACK	P25
13	WHITE	P13	S DRAIN CUT	

NO.	DESCRIPTION	QTY	UNIT
*	LABEL: Prop 65 WARNING, 40*15MM	1	PCS
*	PE BAG: L"xW"x0.06MM	A/R	PCS
*	HT-TUBE OD:1.5MM, WHITE 15MM	25	PCS
*	TIE-A BLACK	XX*2	MM
*	CARTON: 46x30x25CM	A/R	PCS
*	PE BAG: 30"x28"x0.08MM	A/R	PCS
*	PE BAG: L"xW"x0.06MM	1	PCS
5	SCREW #4-40/BLACK	2	PCS
4	PVC BLACK (UL94-V0)	21	G
3	PVC-IN	6.4	G
2	D-SUB 25PIN MALE, BLACK	1	PCS
1	UL2464 28AWG 25C+AD BLACK OD:8.0	L	M



MODEL NAME:

DB25P SINGLE CONNECTOR MOLDING CABLE

MARK EXPLAIN:

- ▲ Revision Change
- ① Important Dimension
- ② Note

TOLERANCE:
0.000:
0.00 : ±0.50
0.0 : ±0.50
0. : ±0.50
ANGLE: ±3.0'
UNIT: mm

COMPUCABLEPLUS
PROVIDING CONNECTIVITY SOLUTIONS