
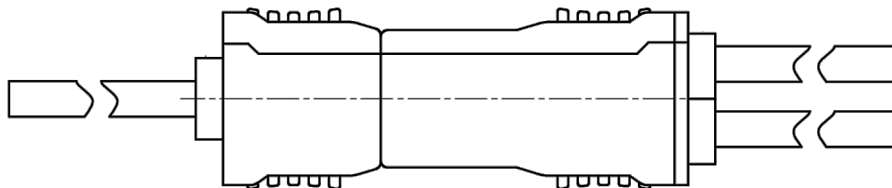
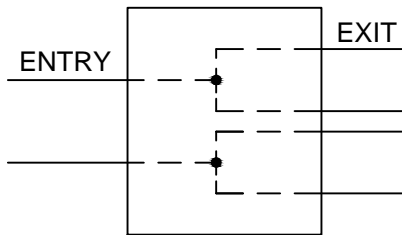
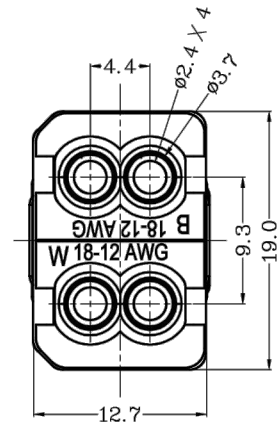
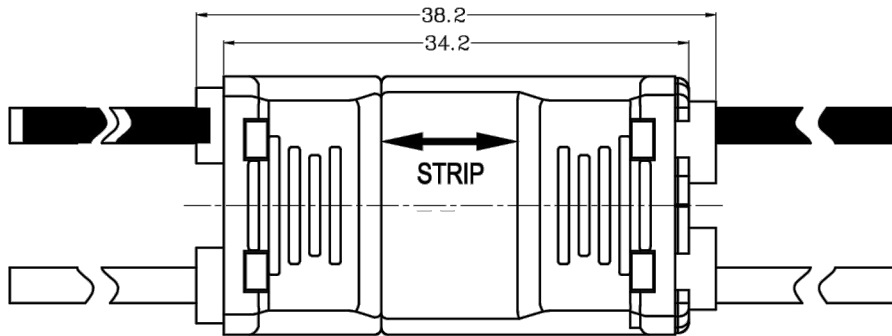


6 5 4 3 2 1

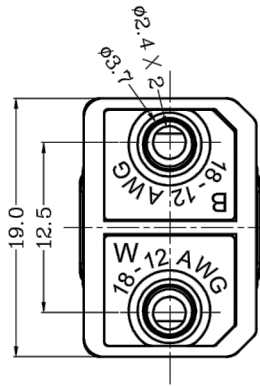

**SPECIFICATIONS:**

Housing: PA66, UL-94V-2 rated

Contacts: Copper alloy

Ratings: 3A, 120VAC

1.3A, 277VAC

1.04A, 347VAC

0.75A, 480VAC

0.6A, 600VAC

6A, 600VAC

Applicable wire: 12 - 18AWG, solid or Tin bonded stranded

Wire Strip length: 9~10mm


Max. operating temperature: 105°C

Certifications:

UL2459 "Touch safe" 

CSA 22.2/2459

Meets NEC 410.73(G) & CEC 30-308 (4)

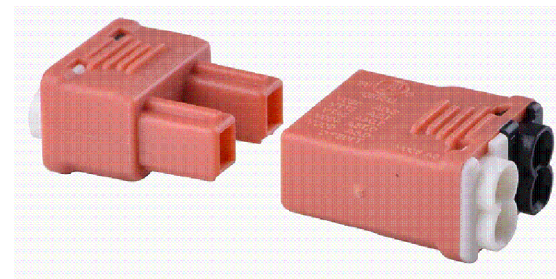

REVISIONS		CHNG	CHECK	APPR
REV	DATE	CHANGE	UPDATED DRAWING	PB
A	11/16/17			

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
XX	± 0.4
XXX	± 0.13
DRAWN BY	PB
CHECK BY	
APPR BY	
DATE:	10/26/17

<b>Power Dynamics, Inc.</b>	
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076	
PART: LUMINAIRE DISCONNECTOR 2X4 TYPE	
PART #: PD-CN-02	SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS
SCALE: NTS	REV: A

6 5 4 3 2 1