
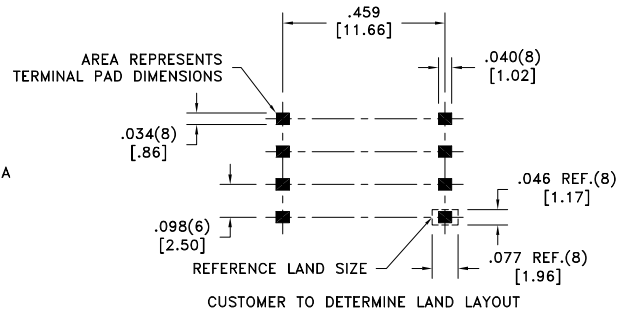



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

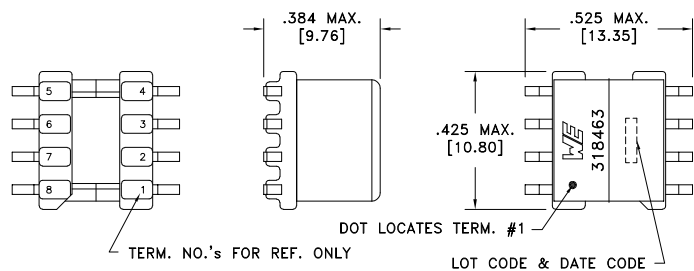

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	1-4 @20°C	1.22 ohms ±10%
D.C. RESISTANCE	6-7 @20°C	1.22 ohms ±10%
INDUCTANCE	1-4 10kHz, 100mVAC, Ls	470uH ±10%
SATURATION CURRENT	1-4 20% rolloff from initial	450mA
LEAKAGE INDUCTANCE	1-4 tie(6+7), 100kHz, 100mVAC, Ls	0.5uH typ., 1.0uH max.
DIELECTRIC	1-7 1500VAC, 2 seconds	1500VAC, 1 minute
URNS RATIO	(1-4):(7-6)	1:1, ±1%

GENERAL SPECIFICATIONS:

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

Functional insulation only.

Wire insulation & RoHS status not affected by wire color.
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-1095 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE TRANSFORMER	PART NO. 750318463
6B	11/19			This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	eiSos p/n: 750318463	
6A	8/19	SEE REVISION SHEET FOR REVISION LEVEL				SPECIFICATION SHEET 1 OF 1

