


10	9	8	7	6	5	4	3	2	
MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH							
1300138076	1R5000A80M010	3' 4" +2.19"/-0 (1.0M +55.6mm/-0)							
1300138077	1R5000A80M020	6' 7" +3.50"/-0 (2.0M +88.9mm/-0)							

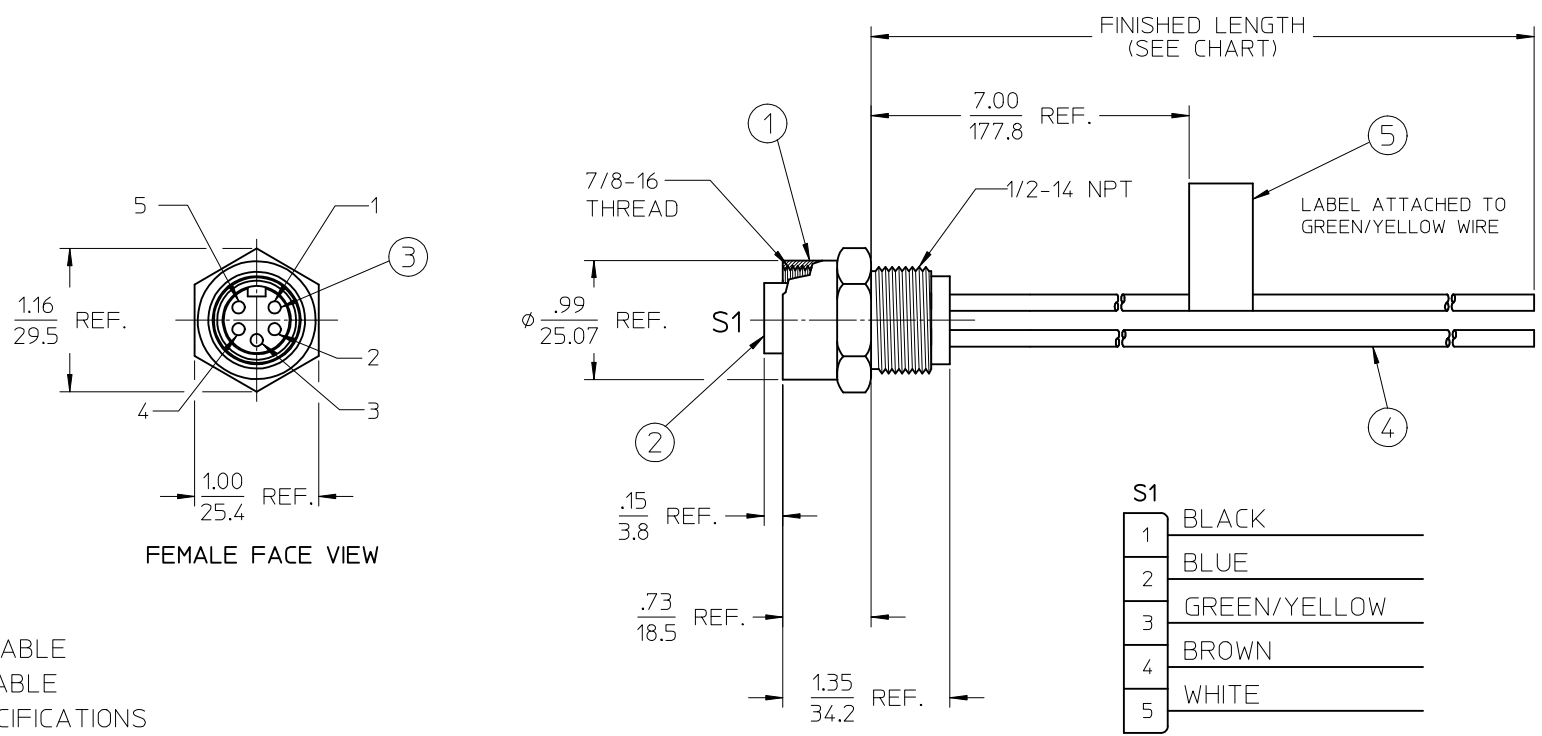

NOTES:
 1. MATERIAL: SEE TABLE
 2. FINISHES: SEE TABLE
 3. ELECTRICAL SPECIFICATIONS
 VOLTAGE RATING: 300V AC/DC
 CURRENT RATING: 8 AMPS
 4. PROTECTION: IP67
 5. ASSEMBLY IS RoHS COMPLIANT BY EXEMPTION

5	1	FLAG LABEL	MYLAR	BLACK/YELLOW
4	A/R	WIRE, 1.5mm ² (16 AWG) (UL 1015)	PVC INSULATION	SEE WIRE DIAGRAM
3	5	CONTACT SOCKET	Cu ALLOY	GOLD PLATED
2	1	INSERT, 5P	PUR	BLACK
1	1	RECEPTACLE SHELL	ZINC DIE-CAST	NICKEL PLATED
ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: IFC2013-0559 DRAWN BY: DRWHRSTONE 2012/11/13 CHKD BY: JKOZWIK 2012/11/26 APPR: JFMURPHY 2012/12/18	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
		mm INCH	IN/MM	1:1	INCH	
A	DESCRIPTION	4 PLACES ± --- ± ---	DRAWN BY DATE	TITLE MINI CHANGE RECEPTACLE ASSY. 5 POLE FEMALE 1.5MM ² (16 AWG)		
		3 PLACES ± --- ± ---	RSTONE 2012/11/13			
A	REV	2 PLACES ± --- ± .01	CHECKED BY DATE	DOCUMENT NO. SD-130013-038 SHEET NO. 1 OF 1		
		1 PLACE ± 0.3 ± ---	K JOZWIK 2012/11/26			
A	REV	0 PLACE ± --- ± ---	APPROVED BY DATE	MATERIAL NO. SEE CHART		
			JFMURPHY 2012/12/18			
		ANGULAR ± 2 °	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				