
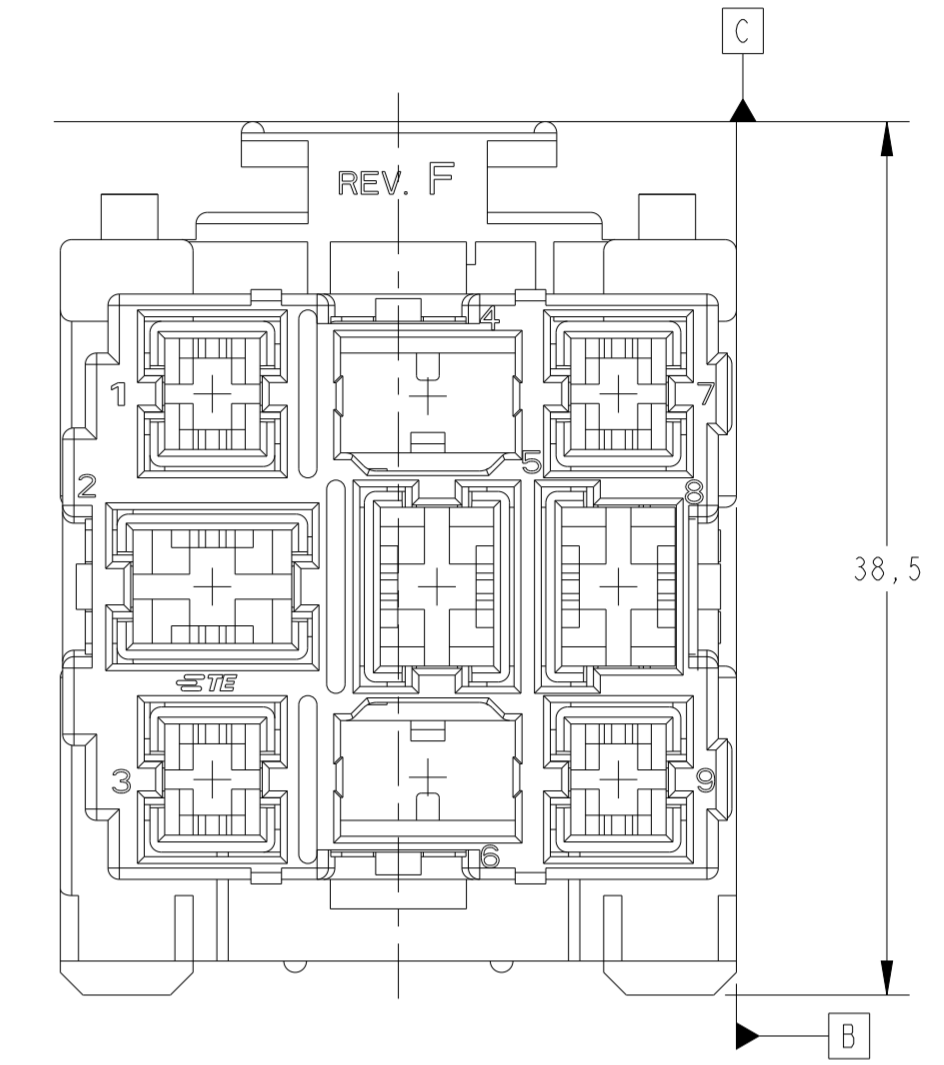
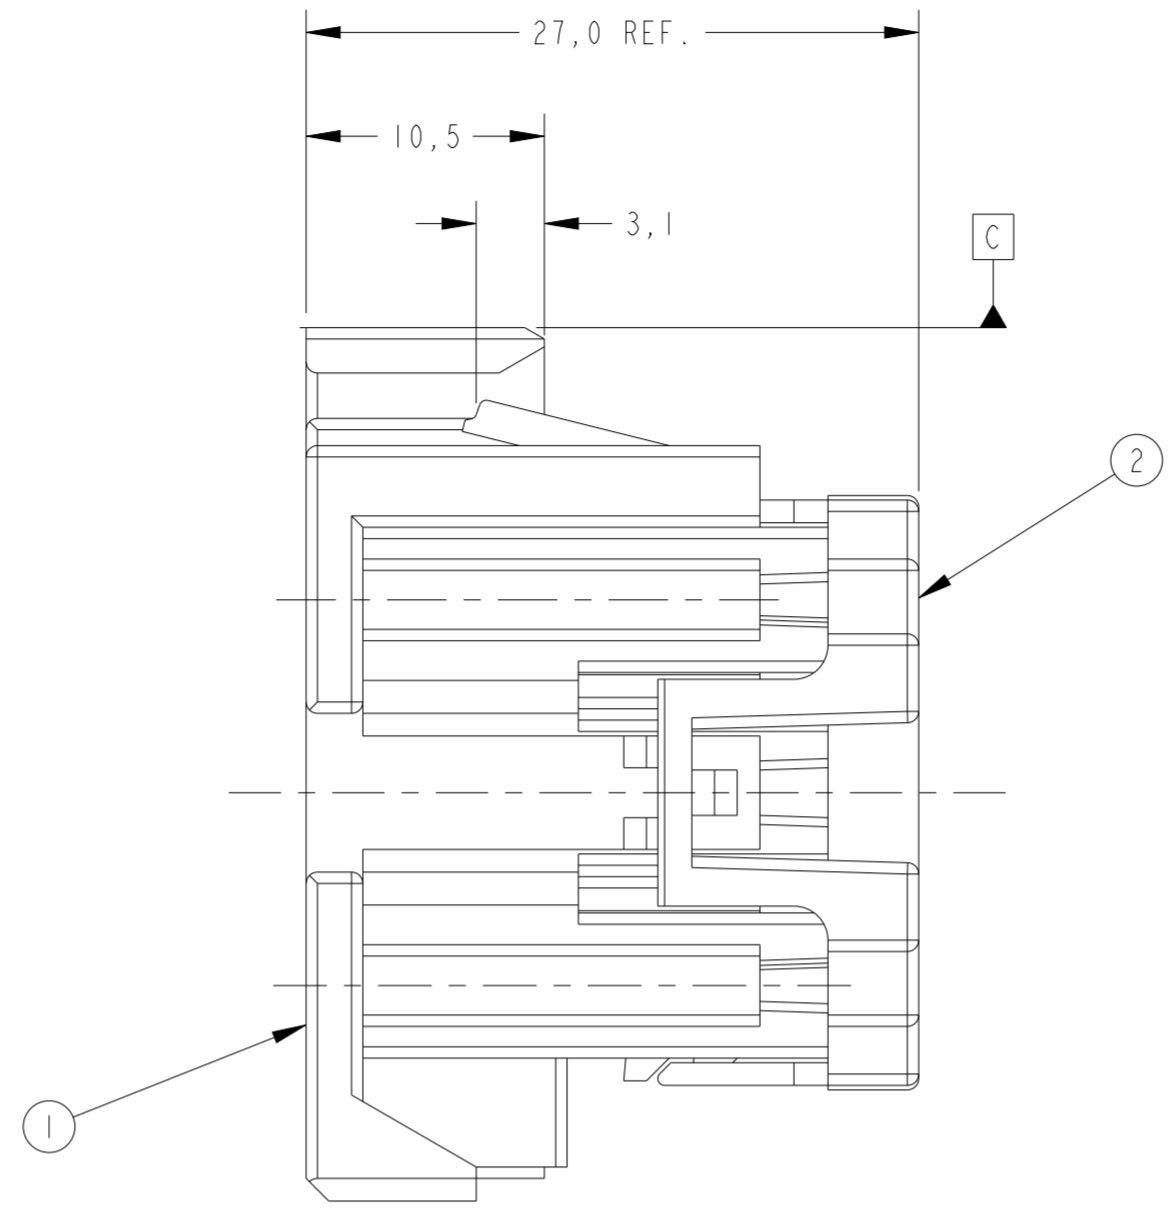


creo
Creo Parametric 2.0
DO NOT REVISE
EXCEPT BY CAD

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
E	1	REVISED PER ECN-22-166554	20OCT2022	AP AB

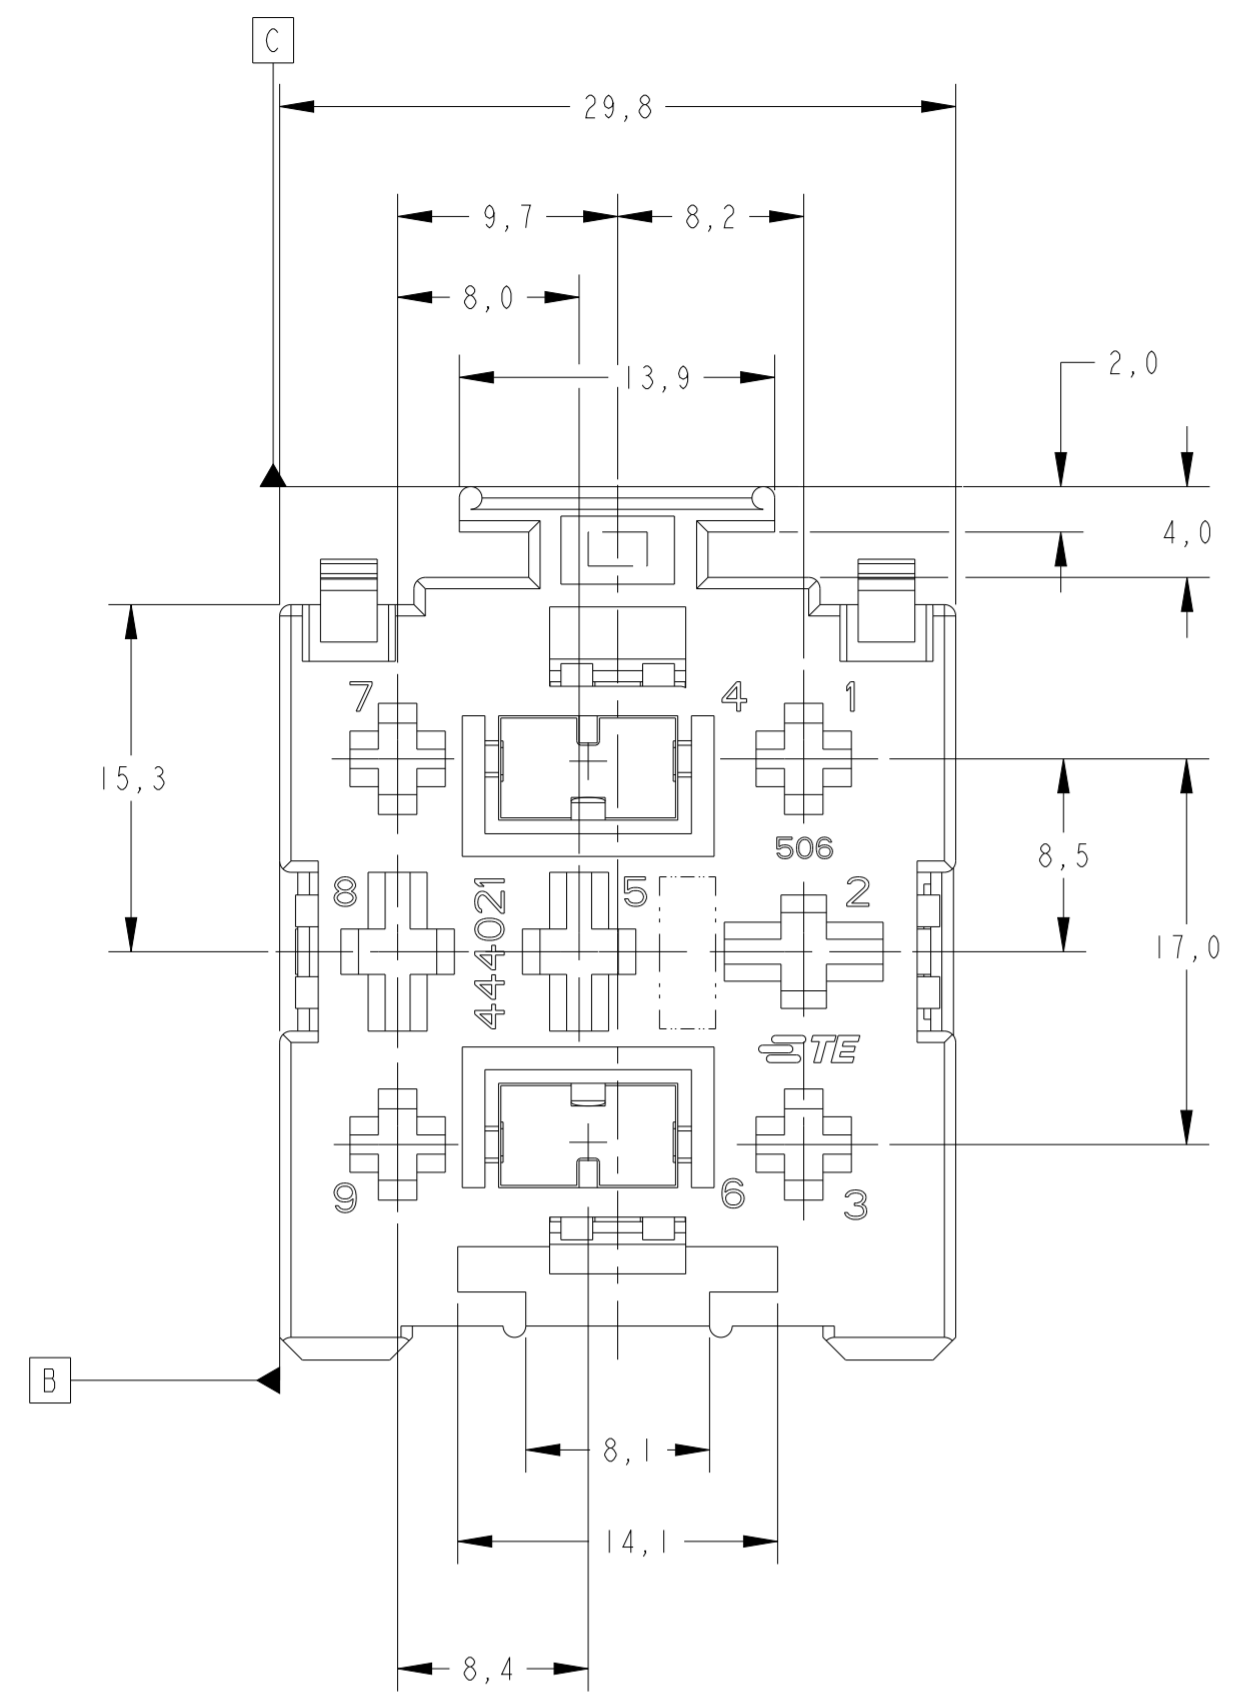

1 - OS ITENS 1 E 2 SÃO FORNECIDOS COMO MOSTRADO. 1 - ITENS 1 AND 2 ARE SUPPLIED AS SHOWN.
 2 - EMBALAGEM PARA EXPORTACAO. 2 - PACKAGING FOR EXPORT.

GRAVAÇÕES MARKINGS
LOGOTIPO AMP AMP LOGO
CÓDIGO PAÍS PRODUTOR MANUFACTURER COUNTRY CODE
NÚMERO COMPONENTE TE TE COMPONENT NUMBER
IDENTIFICAÇÃO CIRCUITO CIRCUIT IDENTIFICATION
PAÍS PRODUTOR MANUFACTURER COUNTRY

REQ. PER ASSY	ITEM	DESCRIPTION	MATERIAL	FINISH
1	2	COVER CAP	PA6-20%GB+10%GF	VIOLETA/VIOLET
1	1	HSG 9 POSN COMB, JR/STD P TIMER		LARANJA/ORANGE
1				CINZA/GRAY
1				VERDE/GREEN
1				BRANCO/WHITE
1				AZUL/BLUE
1				AMARELO/YELLOW
1				VERMELHO/RED
1				MARRON/BROWN
1		HSG 9 POSN COMB, JR/STD P TIMER	PA 66+15%FV/GF	PRETO/BLACK

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN: M.L. OGAWA 28FEB2000
 CHK: P.L. FARIA 06JUL2000
 APVD: J.M.M. NETO 06JUL2000

STE TE Connectivity

NAME: HSG., ASSY., 9 POSN., COMBINED JR/STD POWER TIMER

SIZE: A2 CAGE CODE: - DRAWING NO: C-444314 RESTRICTED TO: -

MATERIAL: TBD DIMENSIONS: mm TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±, 1 PLC ±0,3, 2 PLC ±0,2, 3 PLC ±, 4 PLC ±, ANGLES ±, FINISH -

APPLICATION SPEC: - WEIGHT: - CUSTOMER DRAWING SCALE: 3:1 SHEET: 1 OF 1 REV: E1