


## Coaxial PCB Connector 84\_BMA-50-0-1/111\_N

### Description

Right angle PCB plug

Interface Standards

IEC 60169-33\_MIL-STD-348A/321

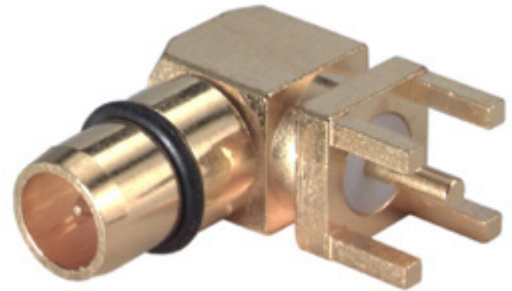

### Technical Data

#### Electrical Data

Impedance	50 $\Omega$
Interface frequency max.	18 GHz

#### Mechanical Data

Board mounting type	through holes
Weight	0.0031 kg

#### Environmental Data

Operating temperature	-65 °C to 125 °C
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant

#### Material Data

Piece Parts	Material	Surface Plating
Centre contact	Copper Beryllium / Brass	Gold Plating (Nickel underplated)
Outer contact	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Body	Copper Beryllium Alloy	Gold Plating (Nickel underplated)
Insulator	PFA / PTFE	
Gasket	NR (Natural Rubber)	

### Related Documents

Catalogue drawing	DCA-00012880
-------------------	--------------

### Ordering Information

Single package	84_BMA-50-0-1/111_NE
----------------	----------------------

### Remarks

PCB connector without stand-offs