


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|---------------------------------------------------------------------------|------|-----------------|
| 1 | 30-00919 | Wire, 4C BC, 26 AWG, UL20280, 300V, 80C, 4.5 mm, braided shield, FT2, TPU | 1 | |

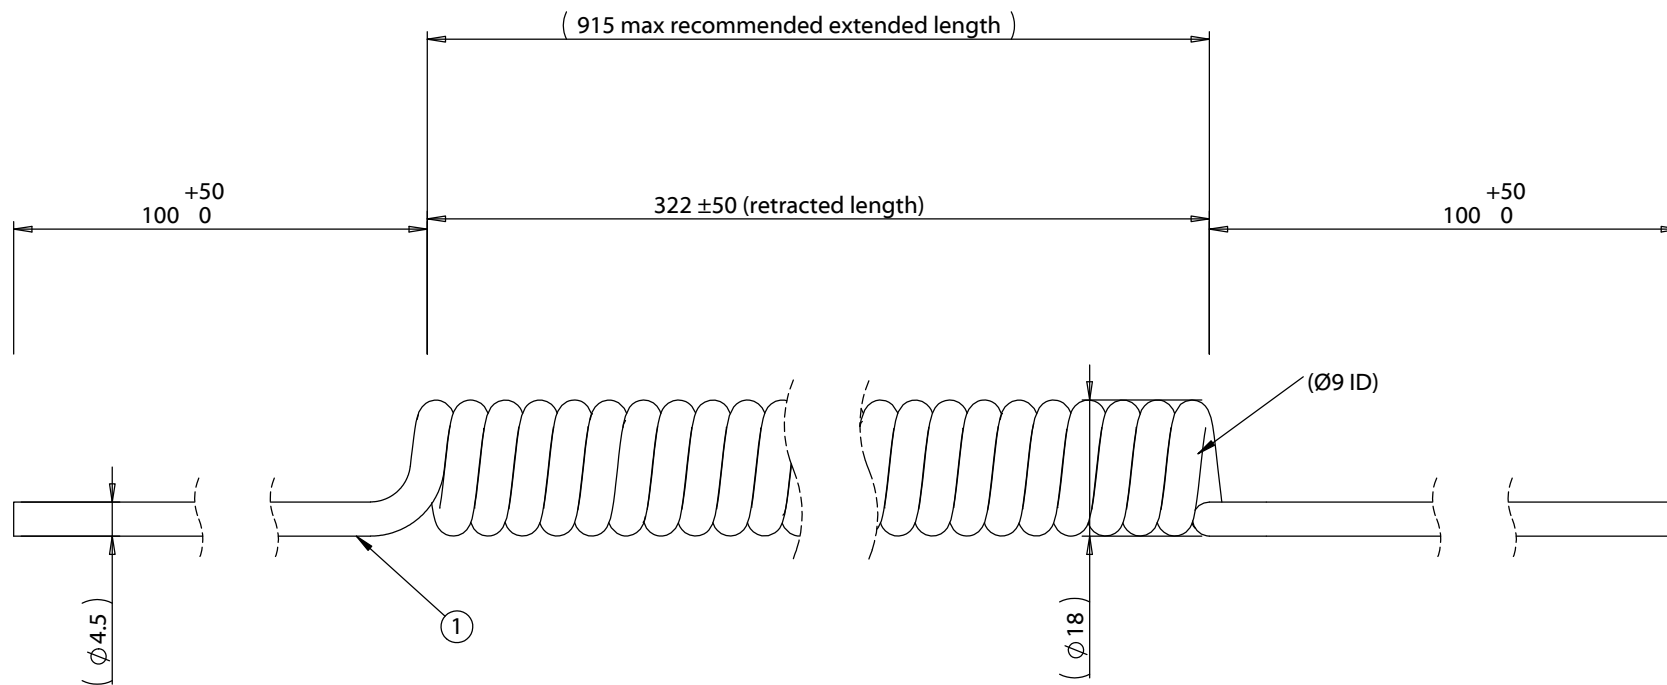

Notes:
Total wire length for resistance calculation: 3250 mm

| | | | | | |
|-----------|------------|-----------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|
| Revision: | Date: | Description: | Prepared: | Notes: RoHS and REACH compliant Phthalate and halogen free Function test: no open, no short circuit, no intermittent | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 10/17/2018 | Initial release | Verified: | | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Coiled cable, 1115 mm, 4C blunt cut to same, 26 AWG, 4.5 mm, TPU, shielded, 30-00919 wire | Size: A |
| | | | | | Part number: 31-00048 |
| | | | | | Scale: 1:1 |
| | | | | | Sheet 1 of 1 |

5

4

3

2

1