



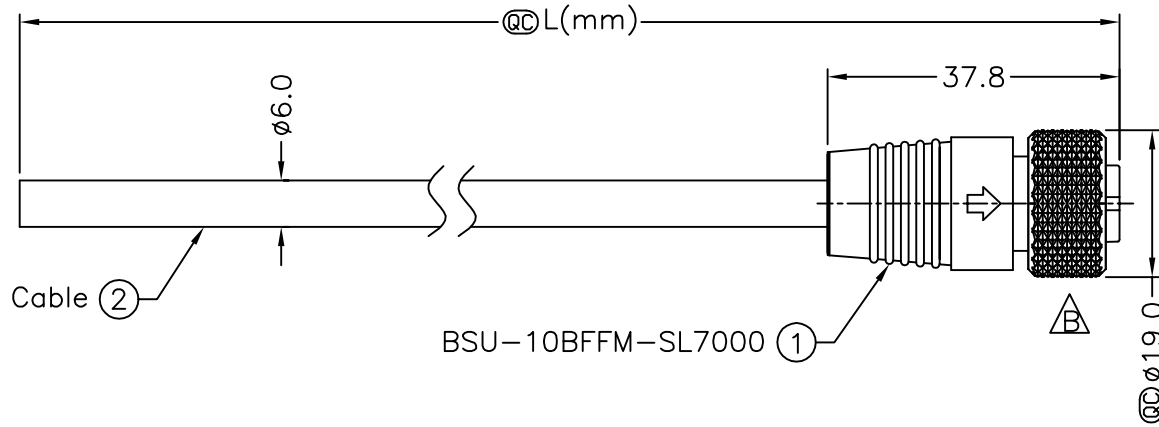


5	6	7	8
REV. B	ECN NO. LEN-790215	DATE 2007/09/13	SIGN WUFEI
			DESCRIPTION Change Nut



Shield	Drain
10	Orange
9	Black
8	Red
7	Pink
6	Gray
5	Yellow
4	Green
3	White
2	Blue
1	Brown
Conn.	Wire Color
	Pin Out



Pin Assignments
Front View

BSU-10BFFM-SL7AXX
 XX:01~99Meter
 01:01Meter
 02:02Meters
 ...
 99:99Meters
 Cable Length(L):01~99Meters

- Note:
- * @@ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF,Black
 - * Pin: Copper Alloy,Gold Plated
 - * Screw Nut: Brass, Nickel Plated
 - * Shell: Brass, Nickel Plated
 - * Ring: EPDM,Black
 - * Brass Shell: Brass.
 - * Cable: UL2464 26AWG*10C+Drain+Al/My Black,PVC Jacket UV Resistant, OD=6.0
 - * Cable Length Tolerance:1M~10M±5%mm, 11M~99M±500mm.

UNIT:mm	TITLE Standard Cable Screw 10Pin F Conn. F Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY WUFEI	DATE 2007/09/13
TOLERANCE ±0.5 mm	SCALE Free	SHEET 1 OF 1		DWG NO BSU-10BFFM-SL7AXX	CHECKED BY TINA	DATE 2007/09/15
	REV. B	SIZE A4	@@ :Inspection Item	CUSTOMER ALTW	APPROVED BY VICTOR	DATE 2007/09/15

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.