


T340E337M006AT

T340, Tantalum, MnO₂ Tantalum, Commercial Grade, 330 uF, 20%, 6 VDC, 700 mOhms, Lead Spacing = 10mm

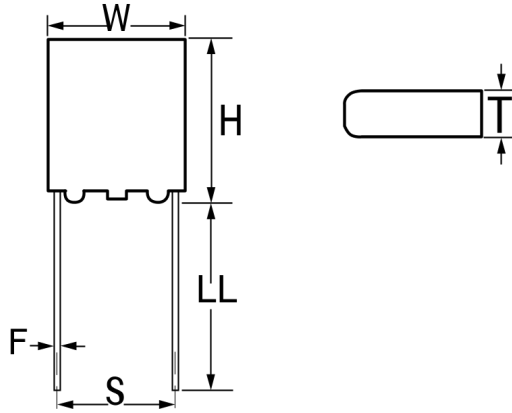

Click [here](#) for the 3D model.

Dimensions

W	12.3mm MAX
H	10.5mm MAX
T	12.3mm MAX
S	10mm +/-0.5mm
LL	15mm +/-2mm
F	0.64mm +/-0.03mm

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	50

General Information

Series	T340
Dielectric	MnO ₂ Tantalum
Style	Radial Molded
Description	Radial, Solid Tantalum, Molded
RoHS	Yes
Termination	Tin
AEC-Q200	No
Construction	Molded
Miscellaneous	Includes Standoff Height of 0.38 +/- 0.13mm.
Notes	Longest Lead Is Positive.

Specifications

Capacitance	330 uF
Capacitance Tolerance	20%
Voltage DC	6 VDC (85C), 4 VDC (125C), 0.06 VDC (125C Reverse)
Temperature Range	-55/+125°C
Dissipation Factor	8%
Resistance	0.7 Ohms (100kHz)
Leakage Current	10 uA