

6

5

4

3

2





1

APPROVED: _____

DATE: _____

TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/25/05	
A		REDRAWN	8/3/12	
B		REVISED DIM.	06/13/13	
C		UPDATE DRAWING	9/10/15	AV/RT

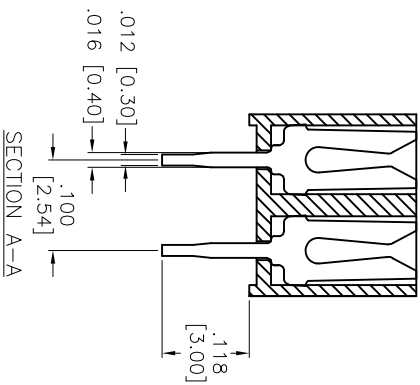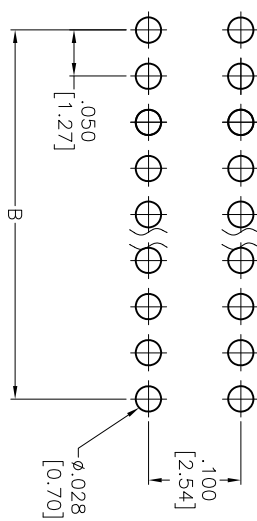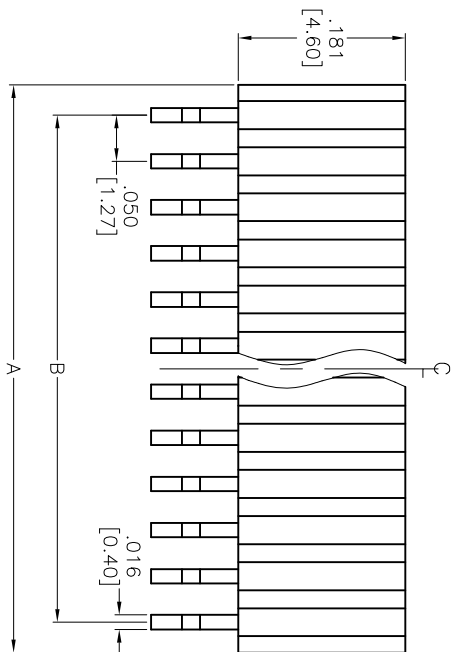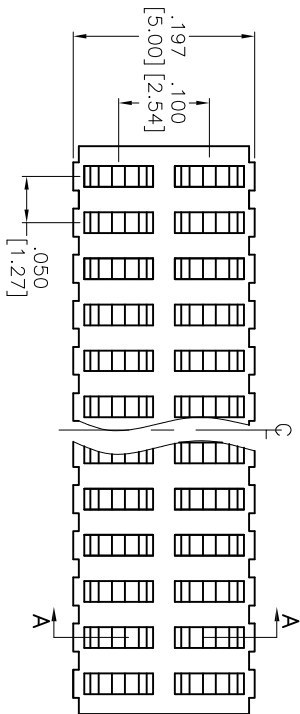

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating: Gold flash over Nickel underplate overall

Electrical:

Current rating: 1 Amp max.

Contact resistance: 20 mohms max.

Insulation resistance: 1,000 Mohms min.

Dielectric withstanding voltage: 500 VAC/DC for 1 minute

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant

Lead free, RoHS compliant

Positions: 04 thru 100
 A = .050 [1.27] x No. of Positions per Row +.016 [0.40]
 B = .050 [1.27] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN	SS	5/25/05	SIZE	PART NO.	HRS-2B-XX-GA	REV.	C
CHECKED			X				
APPROVED			REF:	S00019C	SCALE: NTS	SHEET 1 OF 1	

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 .050 x .100 DUAL ROW RECEPTACLE STRIP
 LOW PROFILE

A

B

C

D

6

5

4

3

2

1

