


**Notes:**

1. Only RoHS Compliant Processes and Materials used for this assembly.
2. Marking to Contain "ConductRF", Part No. & WK/YR Date Code, Black Text.
3. Single Centered Marker up to 15'(4.5M), Two Markers 12"(30cm) from ends for lengths over 15'(4.5M)

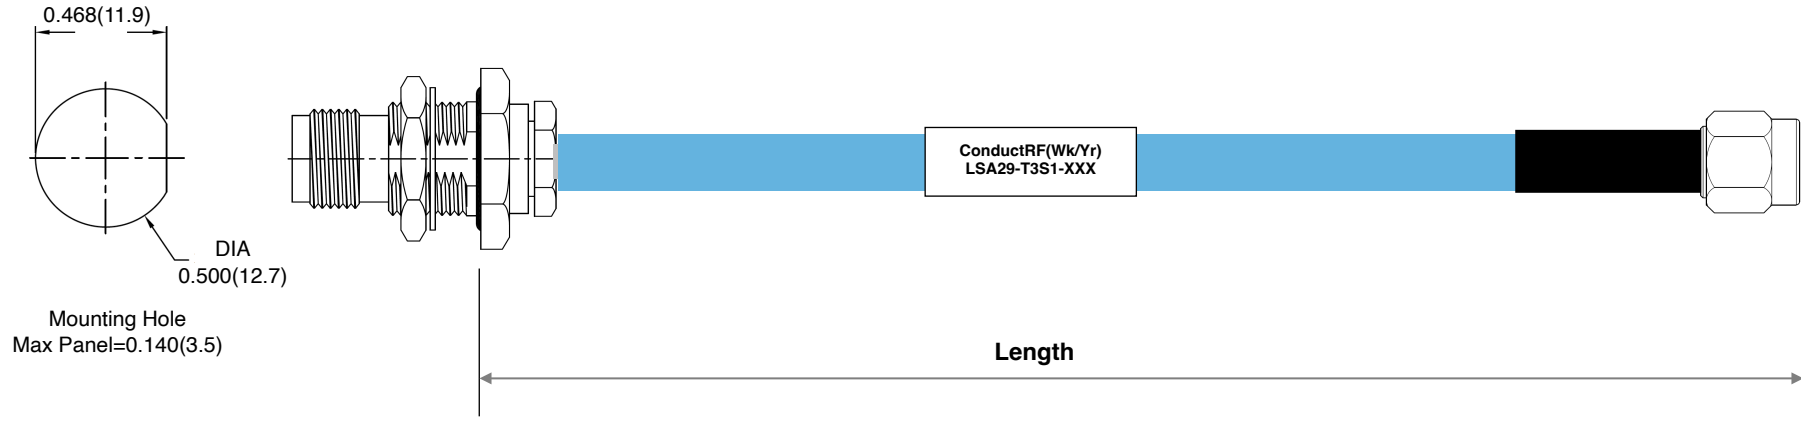

ConductRF # (XXX)	Length	Max. Insertion Loss(dB) - Typ		
		6GHz	12GHz	18GHz
S12	12"	0.55	0.81	1.03
S16	16"	0.67	1.00	1.26
S18	18"	0.73	1.09	1.38
S24	24"	0.91	1.36	1.73
S36	36"	1.28	1.91	2.43
S48	48"	1.64	2.45	3.13
S55	55"	1.85	2.77	3.54
S60	60"	2.00	3.00	3.84
VSWR Typ.		1.30:1	1.35:1	1.45:1

**Part No. Configurator - XXX**

FXX = Length in Feet (eg F03=3ft)  
 SXX = Length in Inches (eg S18=18")  
 XMX = Length in Meters (eg 2M5=2.5m)  
 CXX = Length in CM (eg C50=50cm)

ITEM	DESCRIPTION	UOM	QTY	MATERIALS	FINISH
5	Label	FT.	AS NEEDED	Shrink Tube	Black
4	Strain Relief	FT.	AS NEEDED	Shrink Tube	Black
3	Flexible Spiral Coax	FT.	AS NEEDED	A29SS	Blue FEP
2	SMA Str. Plug	EA.	1	PSM12B-A29G01	Pass. SS
1	TNC BKHD Jack	EA.	1	PTM22B-A29N01	Nickel

REV.	DESCRIPTION	ECN	DRAWN	DATE	Customer DWG	Title: <b>Low Loss 0.141" Flexible TNC BKHD to SMA M - 18GHz</b>				
3	New Data Table Added		DG	07/15/22	Remarks: 035/035/10	Originated: 11/22/16	Conduct RF sales@ConductRF.com Tel: +1 978 374 6840	Range: LSA		Sheet 1 of 1
2	Added Notes		DG	10/16/18		Dwg Ref: LSA29-T3S1				
1	Pre-Release		DG	11/22/16		Part No: <b>LSA29-T3S1-XXX</b>				
REVISION HISTORY					Length Tolerances: ≤24" = ±0.25" >24" = ± 1%	Checked: JW	Approved: PL	Rev: <b>3</b>		