

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [0194031310](#)  
**Status:** **Active**  
**Overview:** [Self-Contained Power Connector \(SCPC\)](#)  
**Description:** Self-Contained Power Connector for 2 Circuit Round Cable with Ground, 14 AWG, Insulation Diameter 8.64-11.18mm

**Documents:**

<a href="#">3D Model</a>	<a href="#">Drawing (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>

**Agency Certification**

CSA	LR18689
UL	E182087


**General**

Product Family	I/O Connectors
Series	<a href="#">19403</a>
Application	Wire-to-Wire
Comments	2 Circuit SEOW/SJEW versions specifically engineered-accommodate round jacketed, stranded conductor power cords typically found in RV slide-out manufacturing applications
Component Type	Plug, Receptacle
Overview	<a href="#">Self-Contained Power Connector (SCPC)</a>
Product Name	SCPC
Type	N/A
UPC	800756068978

**Physical**

Circuits (Loaded)	2
Circuits (maximum)	2
Circuits Detail	2 Circuits with Ground
Color - Resin	Clear, Natural
Durability (mating cycles max)	250
Flammability	94-5VA
Lock to Mating Part	Yes
Material - Metal	High Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polycarbonate, Polyester
Net Weight	29.062/g
Number of Rows	1
Orientation	Vertical
PCB Retention	N/A
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	10.10mm
Plating min - Mating	1.016µm
Plating min - Termination	1.016µm
Polarized to Mating Part	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-35° to +85°C
Termination Interface: Style	IDT or Pierce
Wire Insulation Diameter	8.64-11.18mm
Wire Size AWG	14

**Electrical**

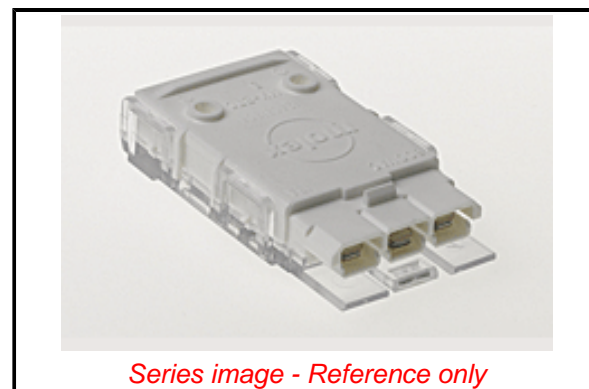

Series image - Reference only

**EU ELV**

**Not Relevant**

**EU RoHS**

**Not Reviewed**

**REACH SVHC**

Not Contained Per - ED/108/2014 (17 Dec 2014)

**Halogen-Free**

**Status**

**Not Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

**China RoHS**

Green Image

Not Relevant

Not Contained

**Search Parts in this Series**

[19403 Series](#)

**Mates With**

[194031310](#) Self-Contained Power Connector for 2 Circuit Round Cable with Ground, 14 AWG

**Use With**

[190453180](#) Safety Cap, [194260001](#) Weather Tight Male Boot for 1214 AWG Round Stranded Cable, [194260002](#) Weather Tight Female Boot for 1214 AWG Round Stranded Cable

**Application Tooling | FAQ**

*Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.*

**Global**

**Description**

**Product #**

Hand Crimp Tool, [SC640015300](#)  
Power Connectors

Current - Maximum per Contact  
Voltage - Maximum

20.0A  
600V

Manual Arbor Press, [640060200](#)  
SC Power Connector

**Material Info**

**Reference - Drawing Numbers**  
Sales Drawing

SD-19045-001-001, SD-19403-148

This document was generated on 07/27/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**