

## SUMMARY

### # Wires



*Image is for illustrative purpose only*

Series	3V
Termination type	No contacts / Accessory
IP rating	68 when mated
AWG wire size	0.00 - 0.00
Cable Ø	0.00 - 0.00 mm
Status	active

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	BRE*: Cap for receptacle
Keying	Circular, female
Housing Material	Brass (nickel plated [SAE AMS QQ N 290]) shell, collet nut, latch sleeve and mid pieces
Weight	32.82 g

### Performance

Configuration
Insulator
Rated Current

### Others



Endurance (Shell): 1000 mating cycles
Temp (min / max): -20°C / +135°C
Climatical Category: 20/200/21
Shielding (min): 95 dB (10 MHz)
Shielding (min): 80 dB (1 GHz)

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*

Salt Spray Corrosion: >144 hr  
Pressure: 30 bars

---

## DRAWINGS

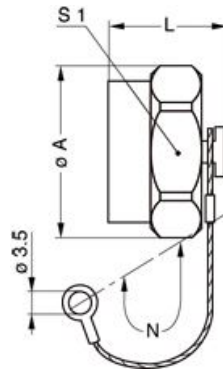

### Dimensions

	A	L	N	S1
mm.	27.8	14.7	120	26
in.	1,09	0,58	4,72	1,02

---

## RECOMMENDED BY LEMO

### Tools

*LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.*