


**D-SUBMINIATURE CONNECTORS:**  
**KF66X Series**  
 Right Angle PCB Mount With Ferrite

**KF66X Series Dimensions**  
 Dimensions in mm

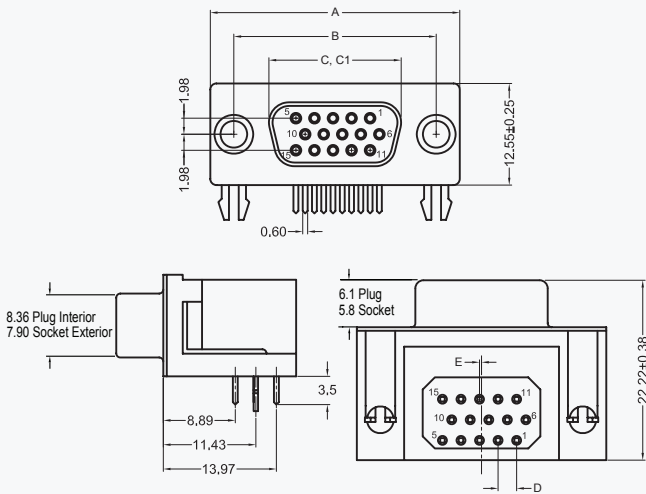

Shell Size	A	B	C	C1	D	E
	In mm	± .015 ± 0.38	± .005 ± 0.13	± .010 ± 0.25	± .010 ± 0.25	± .005 ± 0.13
15 (E)	1.213 30.81	.984 24.99	.643 16.33	.666 16.92	.090 2.29	.010 0.25
26 (A)	1.541 39.14	1.312 33.32	.971 24.66	.994 25.25	.090 2.29	.020 0.51
44 (B)	2.088 53.04	1.852 47.04	1.511 38.38	1.534 38.96	.090 2.29	.020 0.51

C = Exterior of Female Shell (S)  
 C1 = Interior of Male Shell (P)

**Electrical Characteristics**

**Rated Current:** 1.5A  
**Rated Voltage:** 29Vac

2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

Part Number Builder

Series - Shell Size Contact - Contact Type - Mounting Option - Plating Option

**Series**

**KF66X** - High Density D-Subminiature Connector, Right Angle PCB Termination, 0.350" Footprint, with Ferrite

**Shell Size-Contact Option**

- E - 15 Contacts
- A - 26 Contacts
- B - 44 Contacts

**Contact Type**

- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

**Mounting Option**

- N - With Boardlocks and #4-40 UNC Threaded Insert
- NJ - With Boardlocks and #4-40 Jackscrews Installed

**Plating Option**

- Blank - Gold Flash
- 30 - 30µ" Gold

Contact Kycon for VESA and Other Options