


molex

INSULATION DISPLACEMENT CABLE: 0.025" PITCH, 30 AWG, STRANDED EXTRUDED FEP

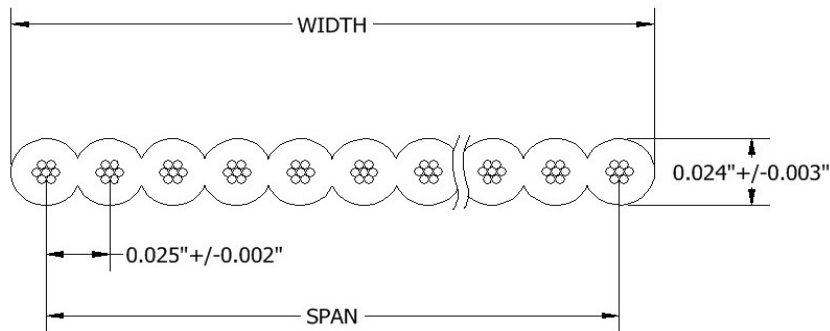

Cond. No.	Part Number	Span	Width
4	1000570287	$0.075'' \pm 0.005''$	$0.100'' \pm 0.005''$
6	1000570291	$0.125'' \pm 0.005''$	$0.150'' \pm 0.005''$
8	1000570296	$0.175'' \pm 0.005''$	$0.200'' \pm 0.007''$
9	1000570297	$0.200'' \pm 0.005''$	$0.225'' \pm 0.007''$
10	1000570272	$0.225'' \pm 0.005''$	$0.250'' \pm 0.007''$
12	1000570273	$0.275'' \pm 0.005''$	$0.300'' \pm 0.007''$
14	1000570277	$0.325'' \pm 0.005''$	$0.350'' \pm 0.007''$
15	1000570275	$0.350'' \pm 0.005''$	$0.375'' \pm 0.007''$
16	1000570276	$0.375'' \pm 0.005''$	$0.400'' \pm 0.007''$
20	1000570021	$0.475'' \pm 0.005''$	$0.500'' \pm 0.007''$
24	1000570279	$0.575'' \pm 0.005''$	$0.600'' \pm 0.007''$
26	1000570022	$0.625'' \pm 0.005''$	$0.650'' \pm 0.007''$
30	1000570023	$0.725'' \pm 0.005''$	$0.750'' \pm 0.007''$
32	1000570084	$0.775'' \pm 0.005''$	$0.800'' \pm 0.007''$
34	1000570283	$0.825'' \pm 0.005''$	$0.850'' \pm 0.007''$
36	1000570284	$0.875'' \pm 0.005''$	$0.900'' \pm 0.007''$
40	1000570024	$0.975'' \pm 0.006''$	$1.000'' \pm 0.007''$
50	1000570025	$1.225'' \pm 0.006''$	$1.250'' \pm 0.010''$
60	1000570026	$1.475'' \pm 0.006''$	$1.500'' \pm 0.010''$
64	1000570292	$1.575'' \pm 0.006''$	$1.600'' \pm 0.010''$
68	1000570027	$1.675'' \pm 0.006''$	$1.700'' \pm 0.010''$
72	1000570507	$1.775'' \pm 0.006''$	$1.800'' \pm 0.010''$
80	1000570028	$1.975'' \pm 0.006''$	$2.000'' \pm 0.010''$
100	1000570029	$2.475'' \pm 0.006''$	$2.500'' \pm 0.010''$

CHARACTERISTICS		
Conductor	30 AWG, 7/38, Silver Plated Copper	
Insulation	FEP	
Color	Natural with Blue Polarity Stripe	
Impedance (ohms)	85 Unbalanced	120 Balanced
Capacitance (pF/ft)	16.8 Unbalanced	10.8 Balanced
Inductance (uH/ft)	0.11 Unbalanced	0.16 Balanced
Insulation Resistance (Mohm)	>500	
Voltage Rating	150V	
Temperature Rating	-55°C to 150°C	

STANDARD PACKAGING
100 ft./spool, 10 Ft. minimum length

UL STYLE 20726