


## PME261KE6470KR30

Aliases (P561EH474K220A)

Obsolete

PME261/P561, Film, Metallized Paper, General Purpose, 0.47 uF, 10%, 400 VDC, 85°C, Lead Spacing = 25.4mm

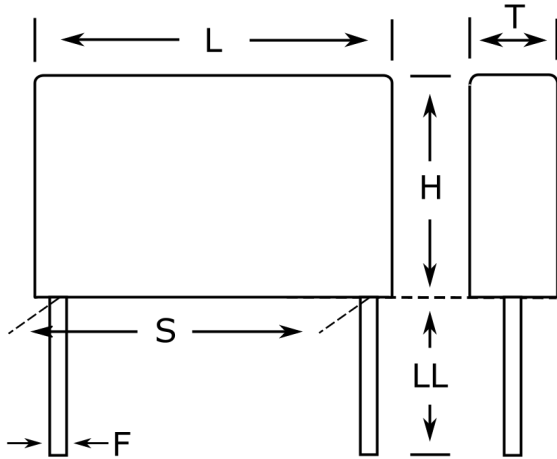

Click [here](#) for the 3D model.

| Dimensions |                 |
|------------|-----------------|
| L          | 30.5mm -0.5mm   |
| H          | 17.3mm -0.5mm   |
| T          | 10.6mm -0.5mm   |
| S          | 25.4mm +/-0.4mm |
| LL         | 30mm +5mm       |
| F          | 1mm +/-0.05mm   |

| Packaging Specifications |           |
|--------------------------|-----------|
| Packaging                | Bulk, Bag |
| Packaging Quantity       | 100       |

| General Information |  |
|---------------------|--|
| Series              | PME261/P561                                |
| Dielectric          | Metallized Paper                           |
| Style               | Radial                                     |
| Features            | Pulse in DC and low frequency applications |
| RoHS                | Yes  |
| Lead                | Wire Leads                                 |
| AEC-Q200            | No   |
| Construction        | Molded                                     |
| Component Weight    | 7.65 g                                     |
| Miscellaneous       | AC Operation: 70C MAX.                     |

| Specifications        |             |
|-----------------------|-------------|
| Capacitance           | 0.47 uF     |
| Capacitance Tolerance | 10%         |
| Voltage AC            | 220 VAC     |
| Voltage DC            | 400 VDC     |
| Temperature Range     | -40/+100°C  |
| Rated Temperature     | 85°C        |
| Dissipation Factor    | 1.3% 1kHz   |
| Insulation Resistance | 8.511 GOhms |
| Max dV/dt             | 370 V/us    |