
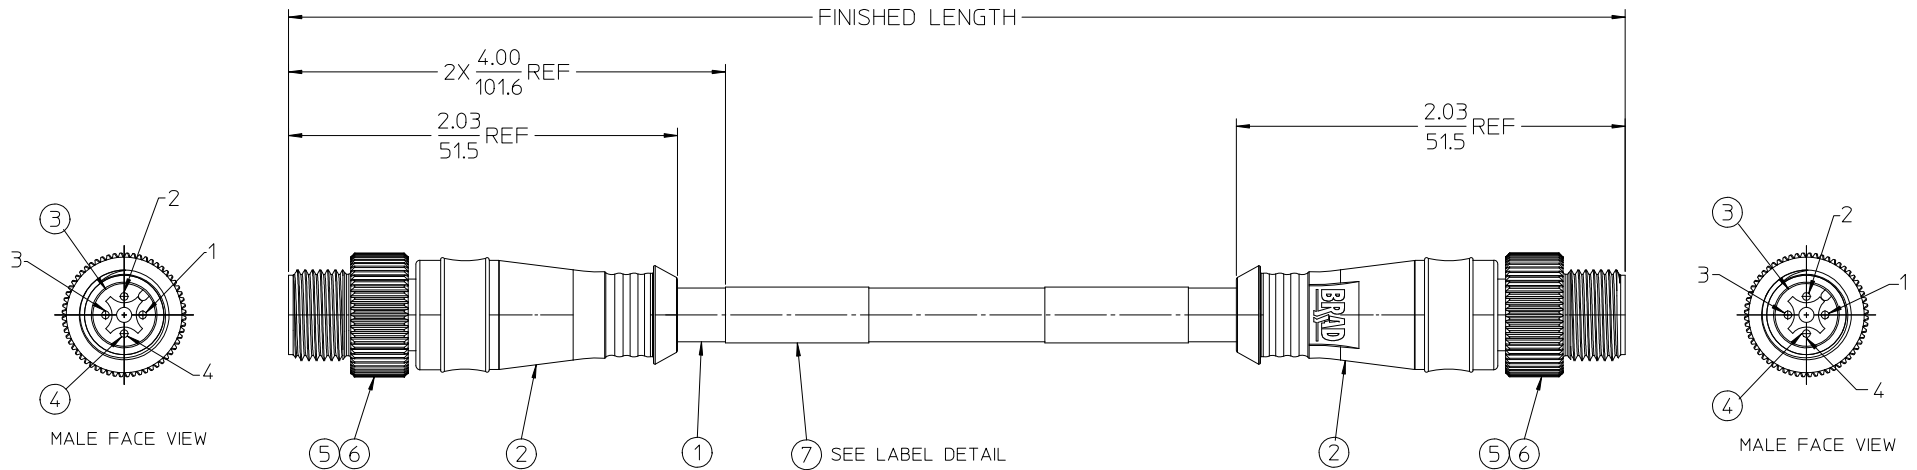


MATERIAL NO.	ENGINEERING NO.	FINISHED LENGTH
1200661883	884060K03M020	6.56' +3.50'-0 [2.0M +88.9 -0]

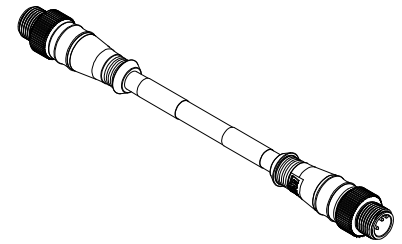

CONNECTOR SPECIFICATION:

PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 105°C
NOT FOR INTERRUPTING CURRENT	
ASSEMBLY IS RoHS COMPLIANT	

1	BROWN	1
2	WHITE	2
3	BLUE	3
4	BLACK	4

WIRING DIAGRAM

Woodhead Connectivity/Brad Harrison[®]

NOT FOR INTERRUPTING CURRENT
POUR ISOLEMENT SEULBMENT

PHONE: (800) 225-7724
P/N: 1200661883

VOLTS	AMPS	DOM	S/O #
24	0.5	YY/MM/DD/RR	XXXXXX

24 VOLTS, 0.5 AMPS MAX. CLASS 2 CIRCUIT
ASSEMBLED IN MEXICO

LABEL DETAIL

ITEM	COMPONENT	MATERIAL	FINISH
7	LABEL	MYLAR	BLACK/YELLOW
6	O-RING	VITON	RED
5	COUPLER	BRASS	TEFLON/NICKEL
4	PIN CONTACT	COPPER ALLOY	GOLD OVER NICKEL
3	INSERT	PUR	BLACK
2	OVERMOLD	TPE	YELLOW
1	CABLE- #18/4 (COPPER STRANDING) 4 CONDUCT. 300V	JACKET: TPE	JACKET:YELLOW

RELEASED	EC NO: MNA2011-0552	2012/01/16
DRWN:BRUPERT	CHKD:	2012/03/20
APPR: JFMURPHY	DESCRIPTION	
REV		

QUALITY SYMBOLS
 ▽=0
 ▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± .005	± .0005
3 PLACES	± .005	± .0005
2 PLACES	± 0.13	± .010
1 PLACE	± 0.25	± .020

ANGULAR ±1/2°

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
DRAWN BY BRUPERT	DATE 2011/11/04	TITLE MICRO-CHANGE 4P M/M STR		
CHECKED BY	DATE	APPROVED BY JFMURPHY		
DATE 2012/03/20		DATE 2012/03/20		
MATERIAL NO. SEE CHART		DOCUMENT NO. SD-120066-048		
SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

MOLEX INCORPORATED		SHEET NO. 1 OF 1
--------------------	--	---------------------